


ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0476

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

Hardware Package (included):

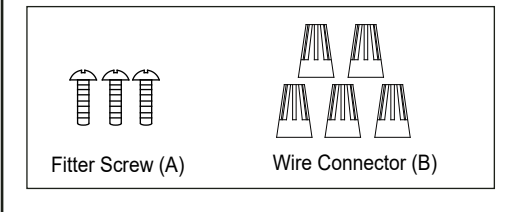


Installation Steps


Turn off the power at fuse or circuit box

1. Unscrew the loop to remove the rubber pad and cover.
2. Unscrew the hex nut and washer from the threaded pipe to remove the upper cover.
3. Gently place four glass panels into the metal frame, then press the clips to secure the glass panels. (Fig.1)

Note: The patterned side of faces glass out.

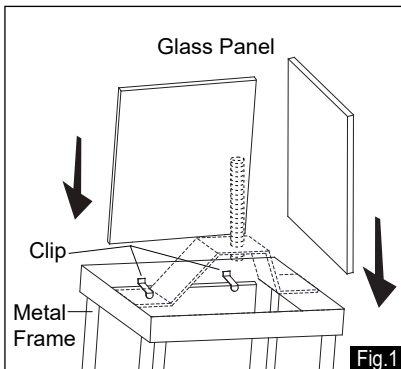

4. Install a bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.
5. Attach the upper cover, washer, hex nut, cover, rubber pad and loop to the threaded pipe.
6. Pull out the wires and grounding wire from the post. Make wire connections using the wire connectors (B):
 - The black wire from the fixture to the black wire from the post.
 - The white wire from the fixture to the white wire from the post.
 - The grounding wire from the fixture to the grounding wire from the post.
 Carefully put the wires back into the post.


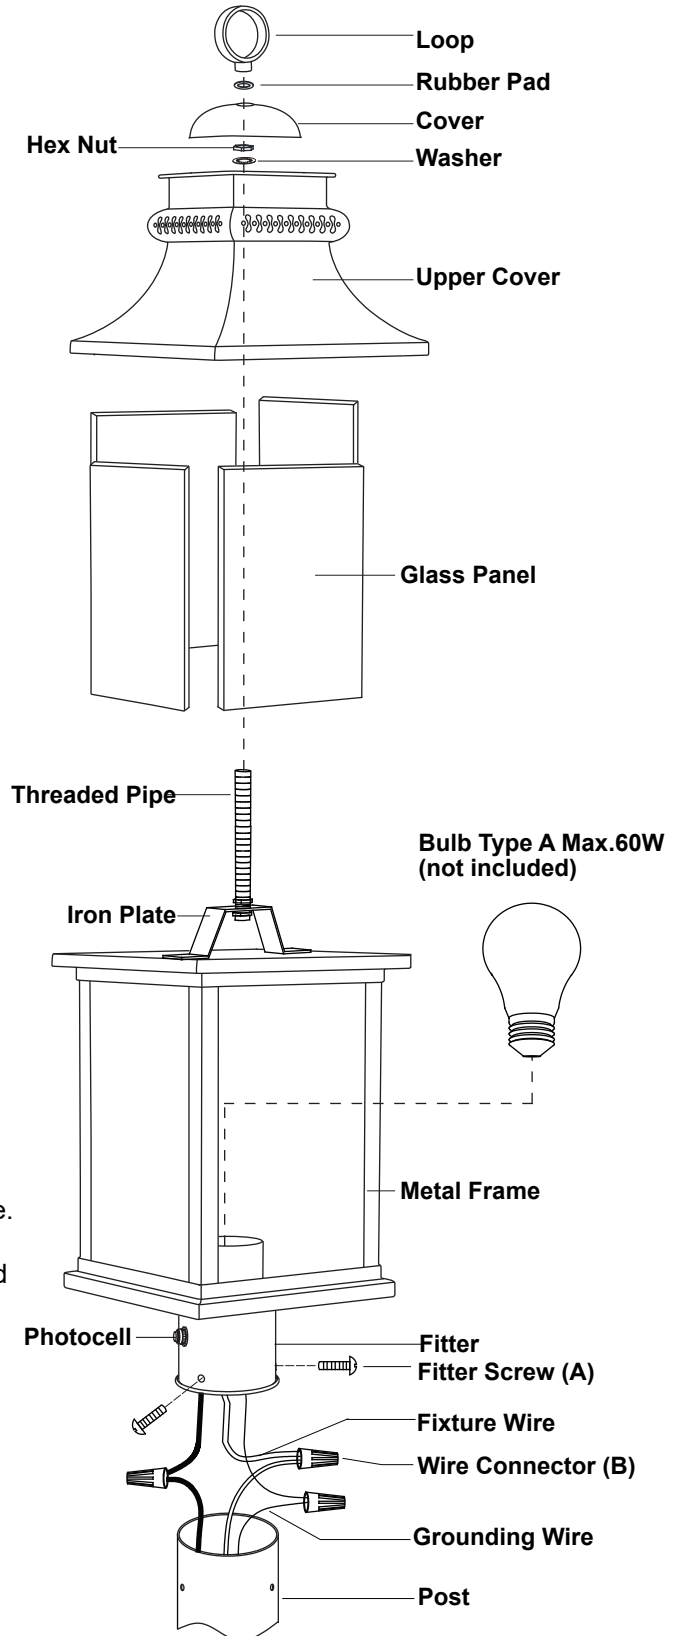


7. Place the fitter on the post, then secure it with the fitter screws (A).

CAUTION: With silicone caulking compound, caulk completely around where the fitter meets with the post surface to prevent water from seeping into the post.

Turn on the power at fuse or circuit box

Operation the Unit Without Photocell

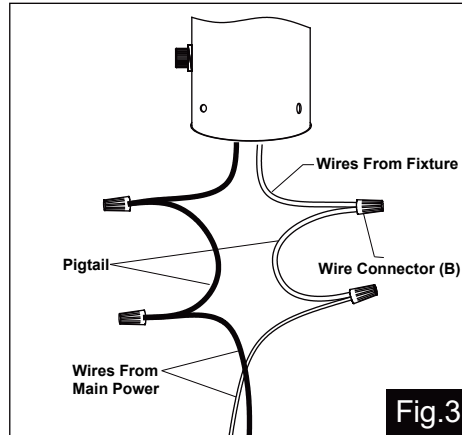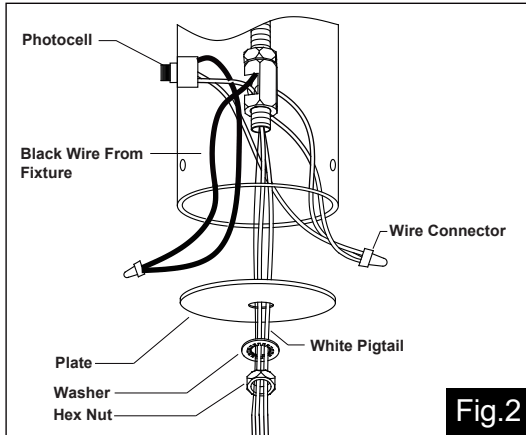


1. Turn off the power at the fuse or circuit box before starting installation.
2. Unthread the fitter screw and plate, and then Loosen the wire connectors connected with the wires from photocell. (See Fig.2)
Note: Do not move the photocell to prevent water from seeping into the outlet box.
3. Take a white pigtail and black pigtail and make wire connections using wire connectors (B) : (See Fig.3)
 - a. The black wire from the fixture to one end of the black pigtail.
 - b. The white wire from the fixture to one end of the white pigtail.
 - c. The other end of the black pigtail to the black wire from the power source.
 - d. The other end of the white pigtail to the white wire from the power source.
 Put all wires back into the back plate of the fixture.

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

<p>Fitter Screw (A)</p>	<p>Wire Connector (B)</p>	<p>Assembly Kit 6062MM (1SET)</p>	<p>Glass Shade 10076W</p>
-------------------------	---------------------------	---------------------------------------	-------------------------------

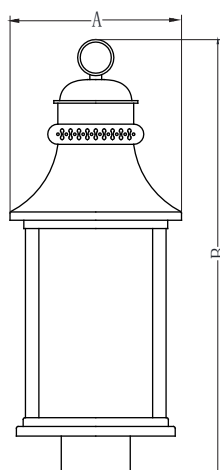

A:8"
B:21-1/2"