


ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0225

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTION.


Hardware Package (included):

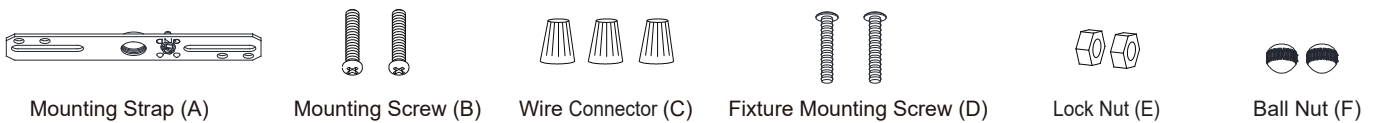

Installation Steps

Turn off the power at fuse or circuit box

1. Secure the fixture and finial onto the frame.
2. Thread two fixture mounting screws (D) through the mounting strap (A), and then secure with two lock nuts (E). Adjust the length of the fixture mounting screws (D) if necessary .
3. Attach the mounting strap (A) to the outlet box by using two mounting screws (B).
4. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire (green insulation or bare wire) to the mounting strap with the green ground screw. Then connect it to the house ground wire with the wire connector (C).Carefully put the wires back into the outlet box.
5. Attach the canopy kit to the mounting strap (A) by inserting the fixture mounting screws (D), and then secure it with two ball nuts (F) .
6. Install three bulbs (not included).
Check relamping label at socket area or packaging for maximum allowed wattage.

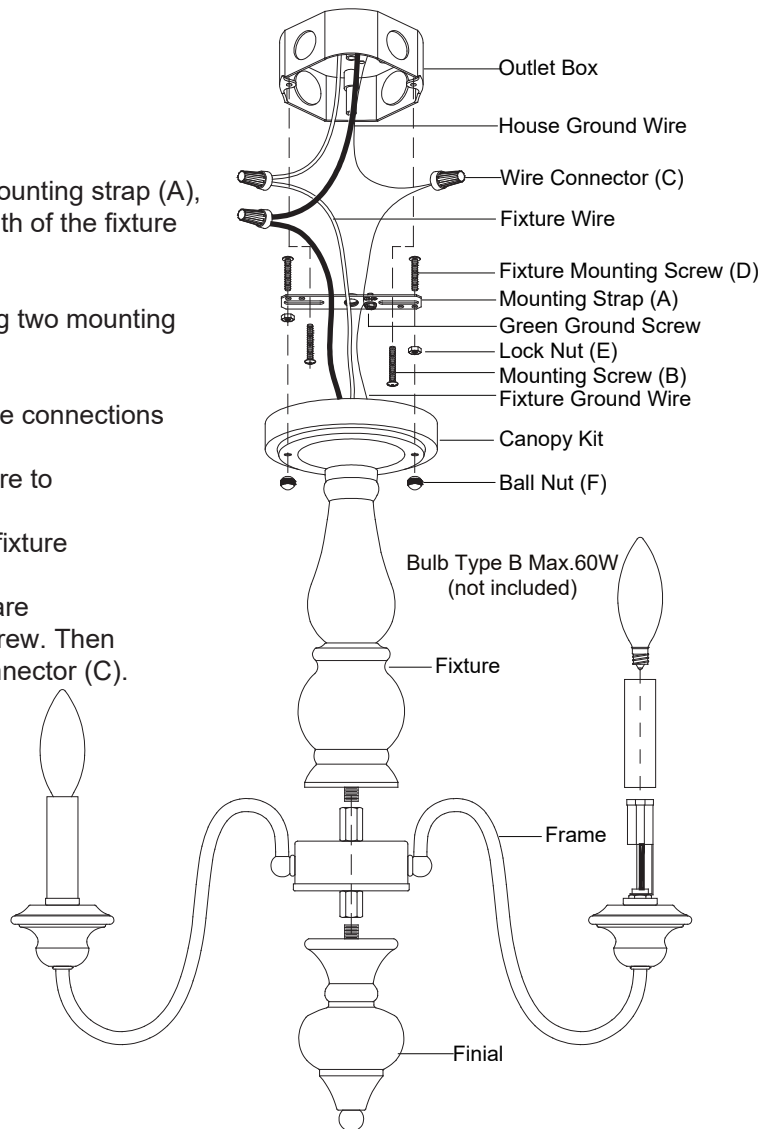

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

Spare Parts List:

