



ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0233

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.


Hardware Package (included):

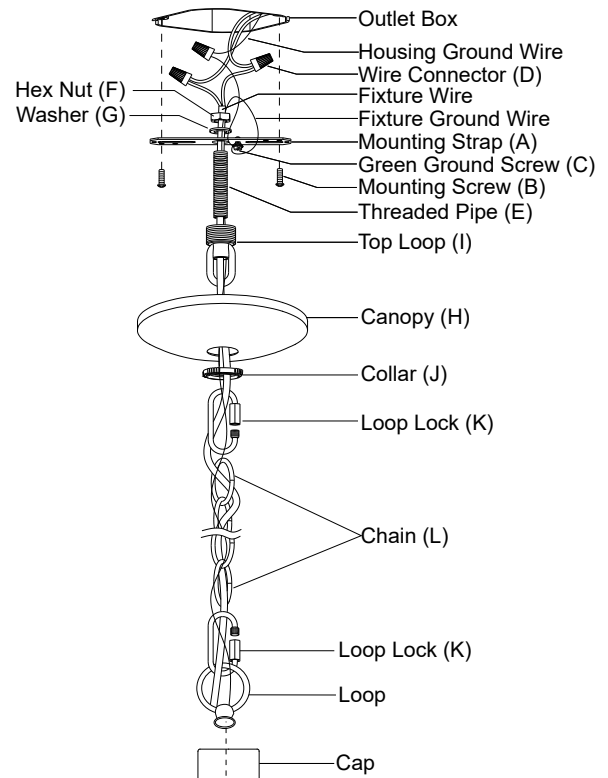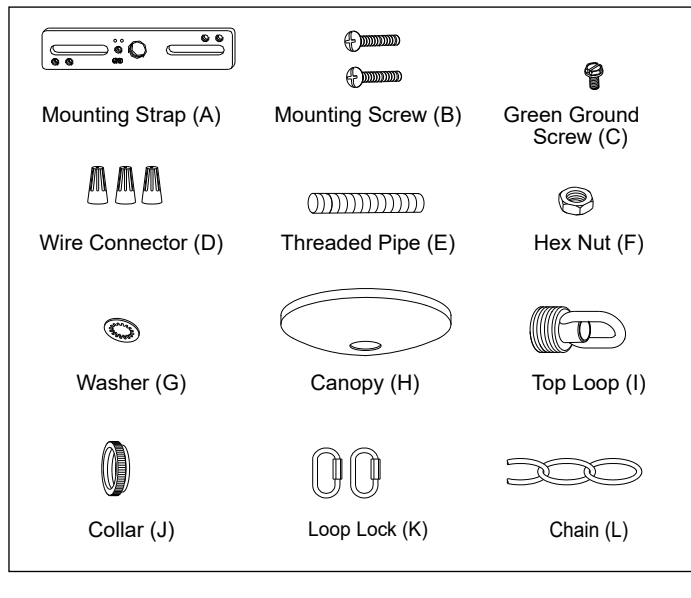

Installation Steps

Turn off the power at fuse or circuit box.

1. Fix the set threaded pipe on the binding post, then thread the fixture body and cap through the set threaded pipe. Finally lock them with the loop.
2. Attach threaded pipe (E) to the mounting strap (A), then secure it with a washer (G) and hex nut (F).
3. Attach the mounting strap (A) to the outlet box by using two mounting screws (B).
4. Secure the top loop (I) to threaded pipe (E).
5. Choose the length of the chain (L) you need, then weave the fixture wire and the fixture ground wire through the chain (L), collar (J) and canopy (H).
6. Connect one end of the chain (L) with the loop by using a loop lock (K).
7. Connect the other end of the chain (L) with the top loop (I) by using another loop lock (K).
8. Thread the fixture wire and fixture ground wire through the top loop (I), threaded pipe (E) and mounting strap (A).

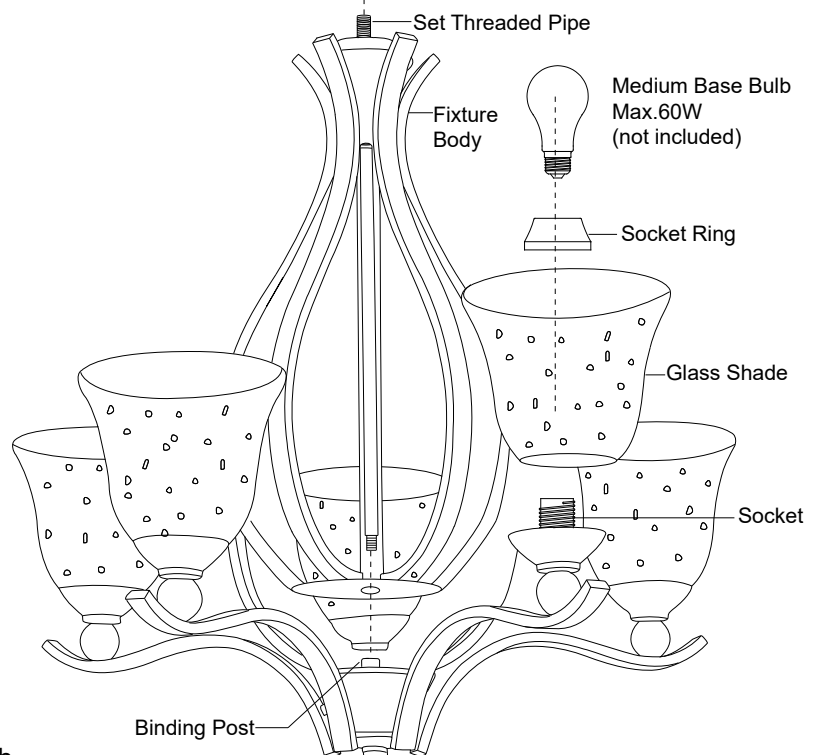

9. Pull out the outlet wires and house ground wire from the outlet box.
 Make wire connections using the wire connectors (D):
 ---The smooth wire (marked) from the fixture to the black wire from the power source.
 ---The ridged wire (unmarked) from the fixture to the white wire from the power source.
 ---Attach the fixture ground wire to the mounting strap with the green ground screw (C).
 Then connect it to the house ground wire with a wire connector (D).
 Carefully put the wires back into the outlet box.

10. Attach the canopy (H) to the mounting strap (A) by inserting the top loop (I), then secure it with the collar (J).

11. Attach the glass shade onto the socket and tighten it with the socket ring.

12. Install five bulbs (not included).
 See relamping label at socket area or packaging for maximum allowed wattage.

Turn on the power at fuse or circuit box.

The following parts are available for re-order if damaged or missing.

Spare Parts List:

				<p>Mounting Hardware 6082MM(1 SET)</p>
Mounting Strap (A)	Mounting Screw (B)	Green Ground Screw (C)	Wire Connector (D)	
Threaded Pipe (E)	Hex Nut (F)	Washer (G)	Canopy (H)	
				Chain (L) 3191CN
Top Loop (I)	Collar (J)	Loop Lock (K)		Glass Shade 1084CS

