


ASSEMBLY AND INSTALLATION INSTRUCTIONS

P0297

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTES: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTION.

Hardware Package (included):

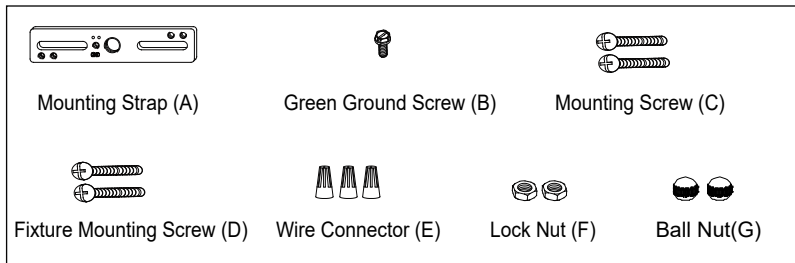

Installation Steps

Turn off the power at fuse or circuit box.


1. Rod Connections:

- Thread the fixture wire from the fixture through the lower rod, and then secure the lower rod onto fixture using the threaded pipe.
- Thread the fixture wire through the middle rod, and then secure the middle rod onto the lower rod using the threaded pipe.
- Thread the fixture wire through the upper rod, and then secure the upper rod onto the middle rod using the threaded pipe.

Note: Length adjustable from 17-3/4" to 62-3/4". Use fewer rods if shorter length is desired.


- Thread the fixture wire through the canopy kit, and then secure the rod assembly to the set threaded pipe of the canopy kit.
- Attach the mounting strap (A) to the outlet box by using two mounting screws (C).
- Pull out the source wires from the outlet box. Make wire connections using wire connectors (E) as follows:
 - Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
 - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire to the mounting strap with the green ground screw (B), and then connect it to the house ground wire with a wire connector (E).

Carefully put the wires back into the outlet box.
- Attach the canopy kit to the mounting strap (A) by inserting the fixture mounting screws (D), then secure it with two lock nuts (E) and ball nuts (G).
- Attach the glass shade to the fixture, and then secure it with the socket ring.
- Install a bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.

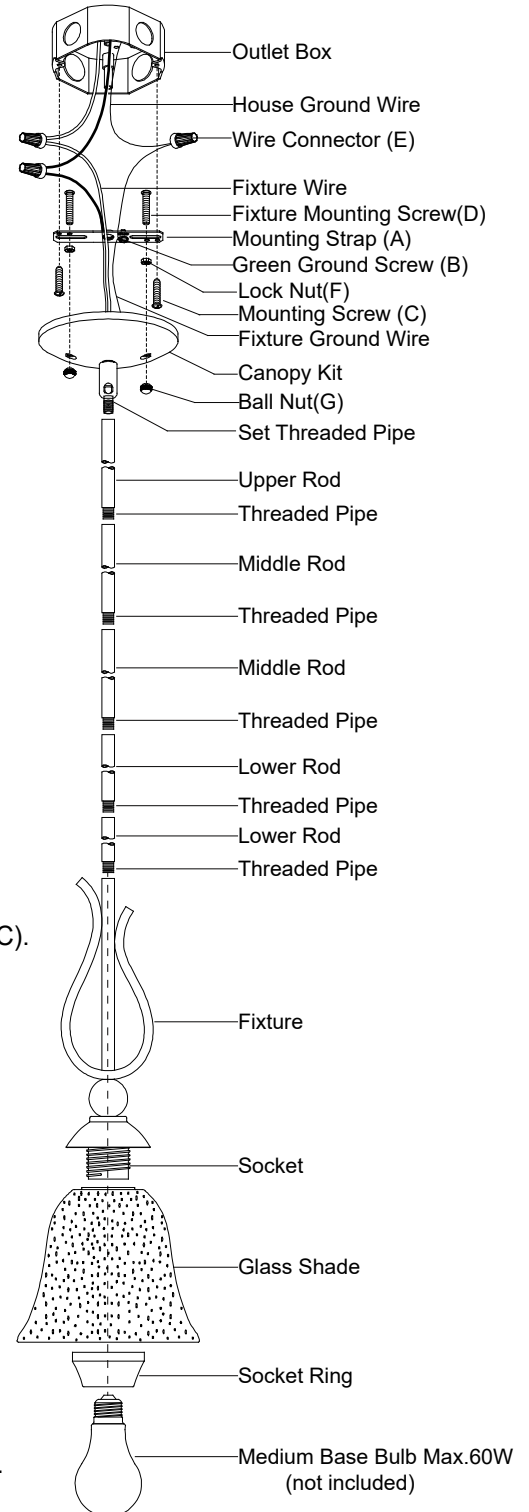

8. Angled mounting recommended for a vaulted or angled ceiling.
 (See Fig. 1)


Turn on the power at fuse or circuit box.

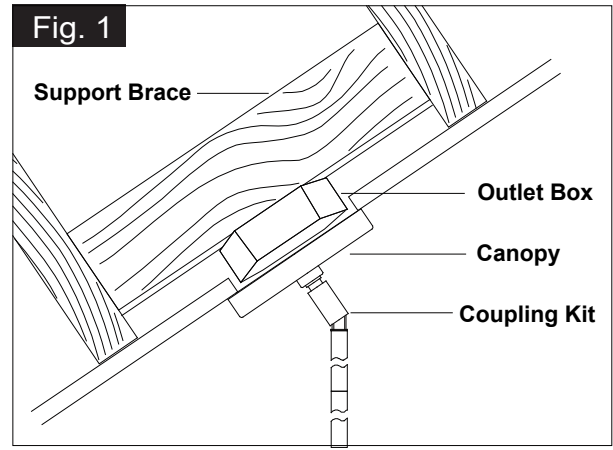

The following parts are available for re-order if damaged or missing.

Spare Parts List:

			→ Mounting Hardware 6079MM (1 SET)
Mounting Strap (A)	Green Ground Screw (B)	Mounting Screw (C)	
Fixture Mounting Screw (D)	Wire Connector (E)	Lock Nut (F)	Ball Nut (G)
12"Rod 3187RD (3PCS)	6"Rod 3188RD(1PC)	3"Rod 3189RD (1PC)	Glass Shade 1084CS

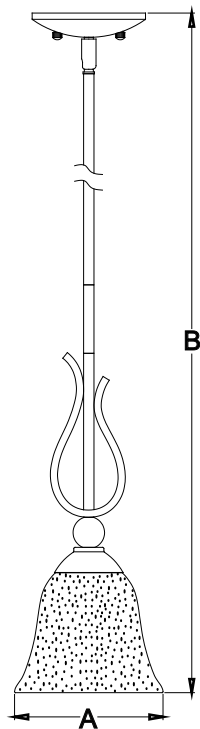

A: 6-1/2"

B: 17-3/4"~62-3/4"