


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

W0339

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTES:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## Hardware Package (included):



Mounting Plate (A)



Mounting Screw (B)



Wire Connector (C)



Fixture Mounting Screw (D)




Lock Nut (E)



Ball Nut (F)



Support Rod (G)

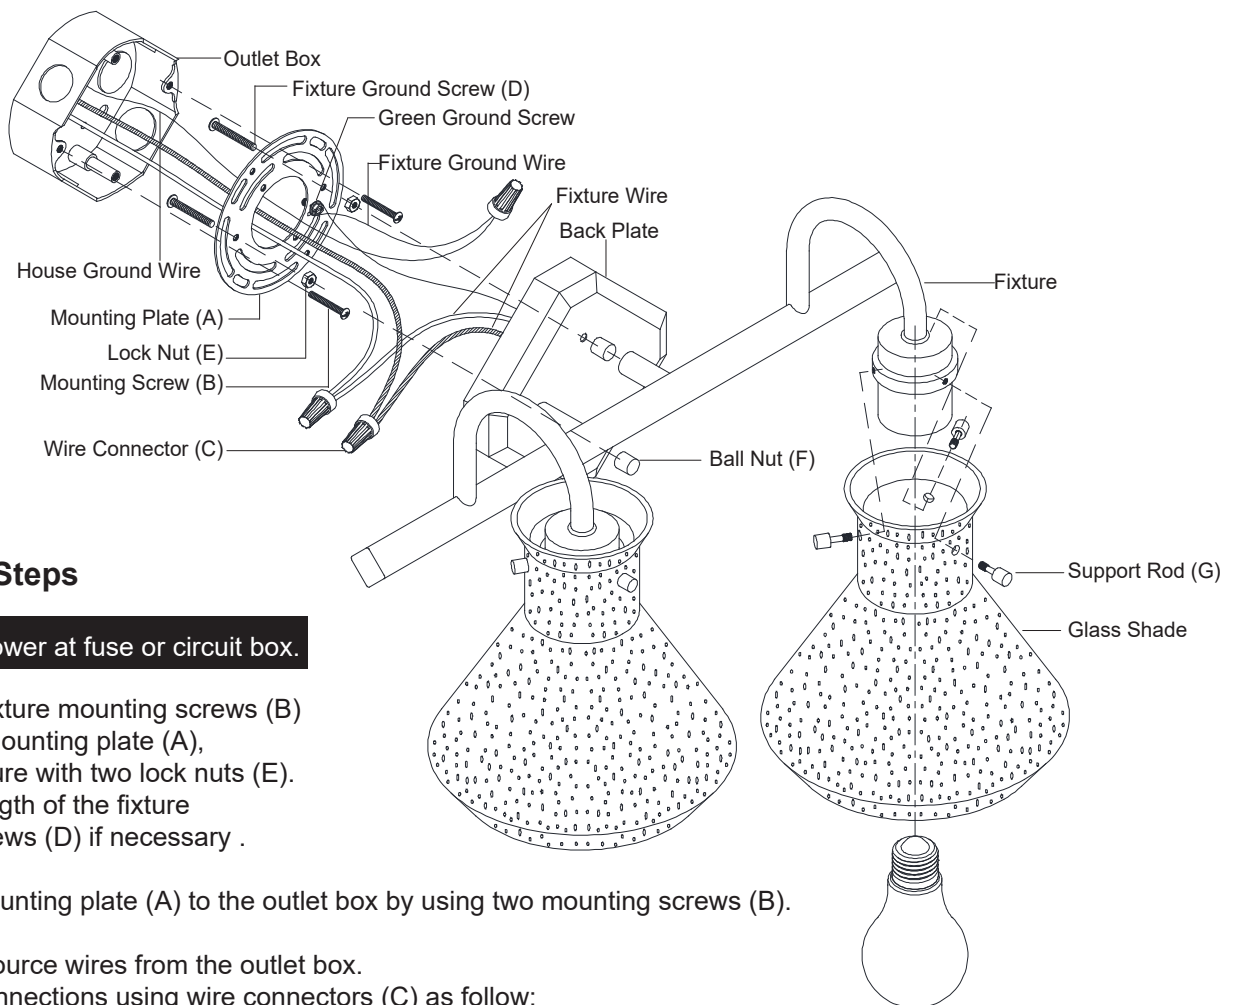

Bulb Type A Max. 100W  
(not included)

## Installation Steps

Turn off the power at fuse or circuit box.

1. Thread two fixture mounting screws (B) through the mounting plate (A), and then secure with two lock nuts (E). Adjust the length of the fixture mounting screws (D) if necessary .
2. Attach the mounting plate (A) to the outlet box by using two mounting screws (B).
3. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follow:
  - Connect the hot wire (black insulation) from the fixture to the black wire from the power source.
  - Connect the neutral wire (white insulation) from the fixture to the white wire from the power source.
  - Attach the fixture ground wire (green insulation or bare wire) to the mounting plate (A) with the green ground screw, then connect it to the house ground wire with the wire connector (C).Carefully put the wires back into the outlet box.

4. Attach the back plate to the mounting plate (A) by inserting two fixture mounting screws (B), then secure it with two ball nuts (F).
5. Attach the glass shade to fixture, then secure it with support rods (G).
6. Install two bulbs (not included). Check relamping label at socket area or packaging for maximum allowed wattage.

Turn on the power at fuse or circuit box.

The following parts are available for re-order if damaged or missing.

**Spare Parts List:**

