
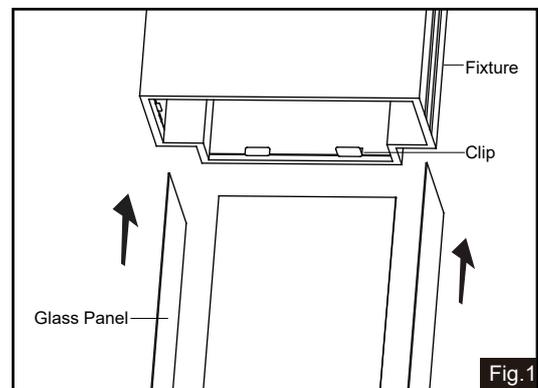
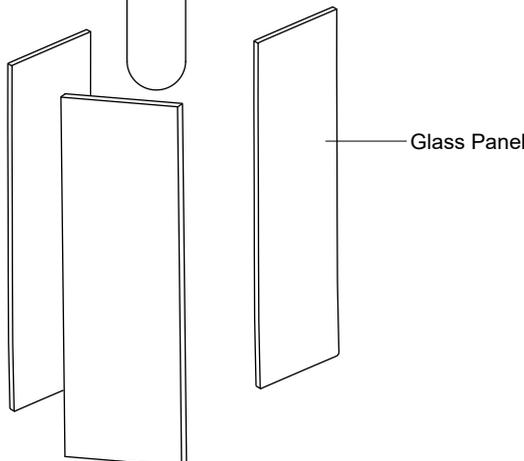
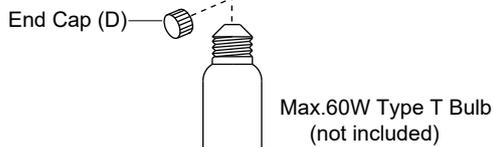
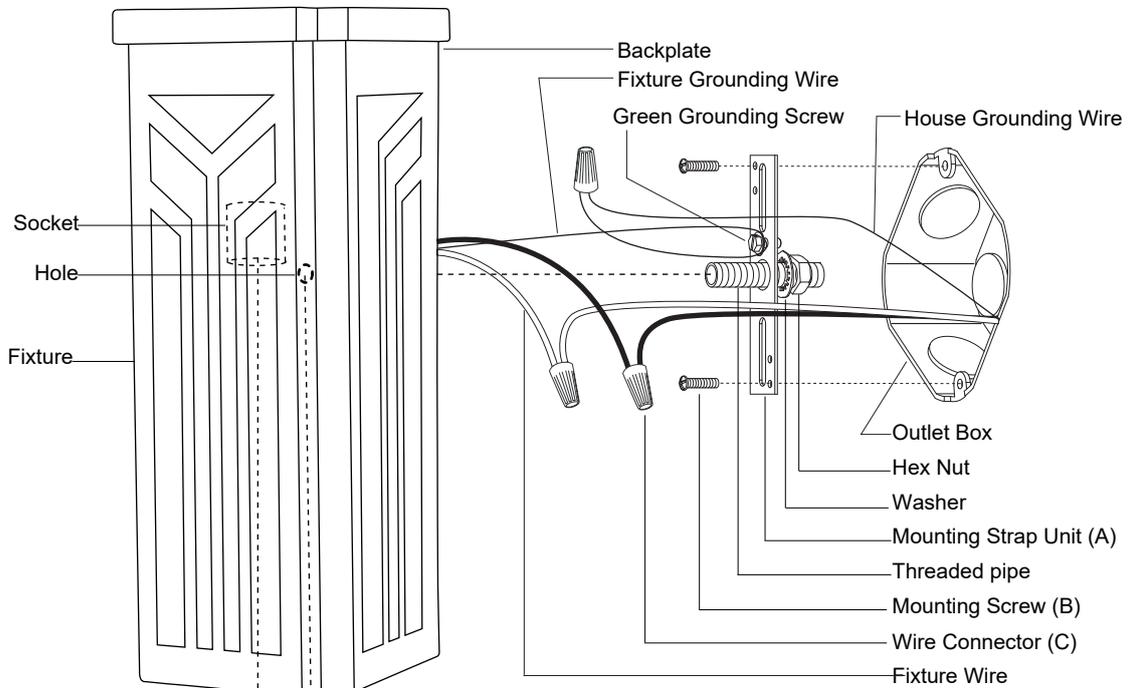


ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0562 / T0563

WARNING: Turn off the main power at circuit breaker before installing fixture.
AVERTISSEMENT: Coupez la source d'alimentation principale au panneau central de disjoncteurs avant d'installer le luminaire.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.

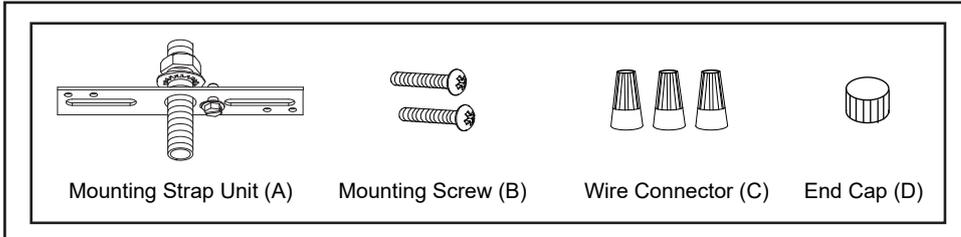

Installation Steps

Turn off the power at fuse or circuit box

1. Attach the mounting strap unit (A) to the outlet box by using two mounting screws (B).
2. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the hot wire (usually black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wire (usually white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire (usually green insulation or bare wire) to the mounting strap unit (A) with the green grounding screw. Then, depending on local code connect it to the house grounding wire with the wire connector (C).
 Carefully put all of the wires back into the outlet box.
3. Attach the fixture to the mounting strap unit (A) by inserting the threaded pipe, then secure it with the end cap (D).
4. Make the top of the fixture upward, gently place three glass panels into the fixture with the clips. (See Fig.1)
5. Install the bulb (not included). Check relamping label at socket area or packaging for maximum wattage allowed .

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.



Spare Parts List:

Mounting Strap Unit (A) Mounting Screw (B) Wire Connector (C) End Cap (D)

↑ Mounting Hardware 6190MM (1SET)

T0562
Glass Panel
X3
10134CS

T0563
Glass Panel
X3
10135CS

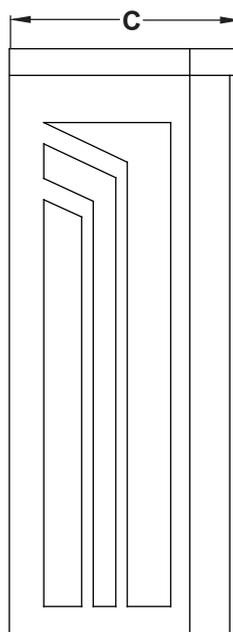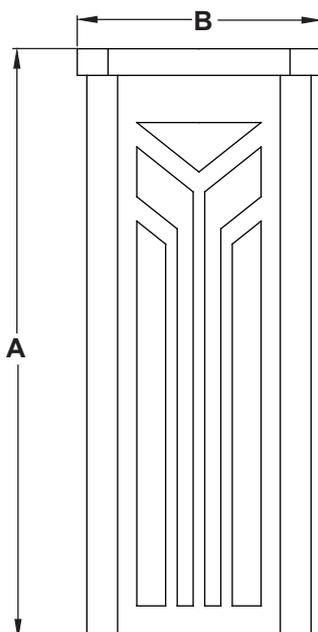

T0562

A:12-1/4"

B:5"

C: 4-3/4"

T0563

A:13-1/2"

B:6"

C: 4-3/4"