

ASSEMBLY AND INSTALLATION INSTRUCTIONS

CH6535, CH6568

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.


NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

Installation Steps

1. Attach the nipple-1 to the mounting strap, and then secure with a washer and a hex. nut.
2. Attach the mounting strap to the ceiling box by using 2 mounting screws.
3. Adjust the arms of the fixture according to the drawing of the package.

Important to know:

- a. The distance between the arms should be equally distanced.
 - b. The arms should be fixed securely.
4. Attach the loop to the nipple-2 of the fixture.
 5. Choose a certain length of the chain you need, and then weave the fixture wire and the grounding wire through the chain links. Spread one end of the chain link to clamp securely to the loop.
 6. Thread the fixture wire and grounding wire through the collar, top loop, canopy, nipple and mounting strap in order.
 7. Secure the top loop to the nipple, and clamp the other end of the chain link to the top loop.
 8. Make wire connections with wire nuts:
 - The smooth wire (marked) from fixture to the black wire from power source.
 - The ridged wire (unmarked) from fixture to the white wire from power source.
 - Attach the grounding wire and house grounding wire to the mounting strap with a green grounding screw.Carefully tuck wires back into the ceiling box.
 9. Attach the canopy to the mounting strap by inserting the top loop, and secure with the collar.
 10. Attach the glass shades to the lamp holders, and secure with the rings.
- Note: The glass shades should be all in horizontal line.
11. Install bulbs. (Please do not exceed the maximum capacity which is recommended on the package.)
 12. Turn on the power at fuse or circuit box.

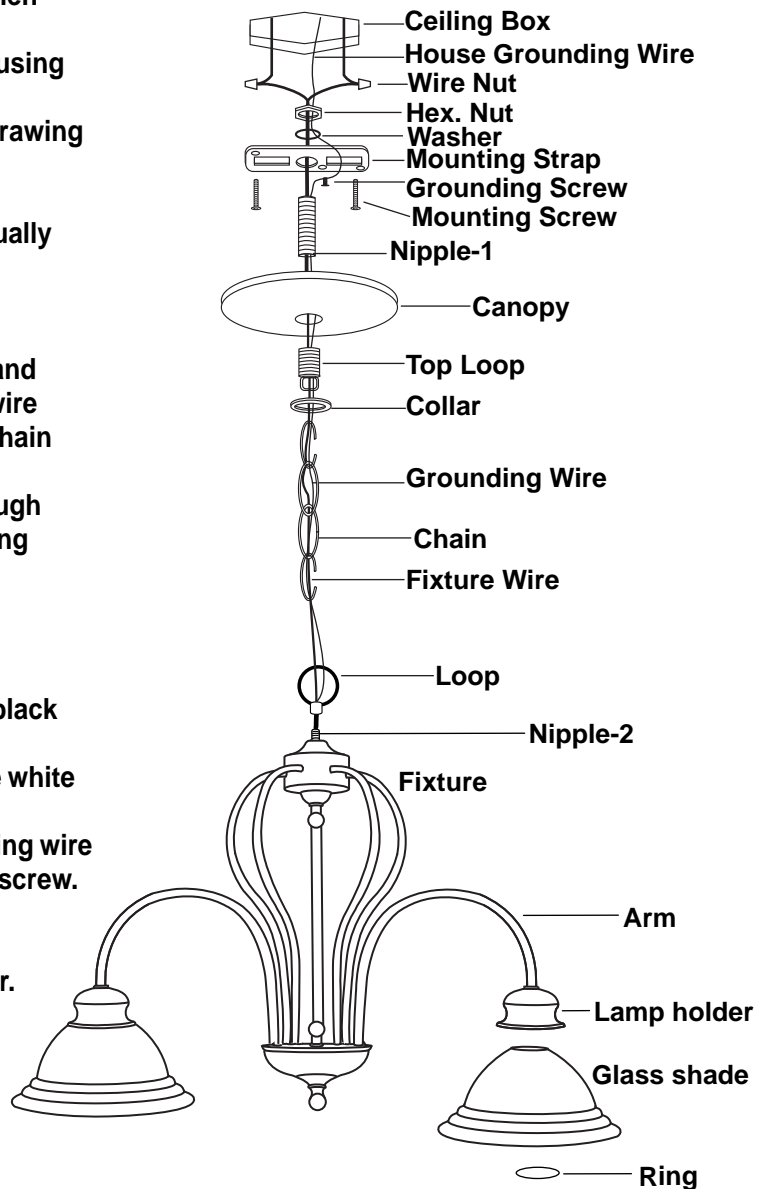

VAXCEL
LIGHTING