


ASSEMBLY AND INSTALLATION INSTRUCTIONS

SE-CHU009 / SE-CHU012

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THIS INSTRUCTION.**

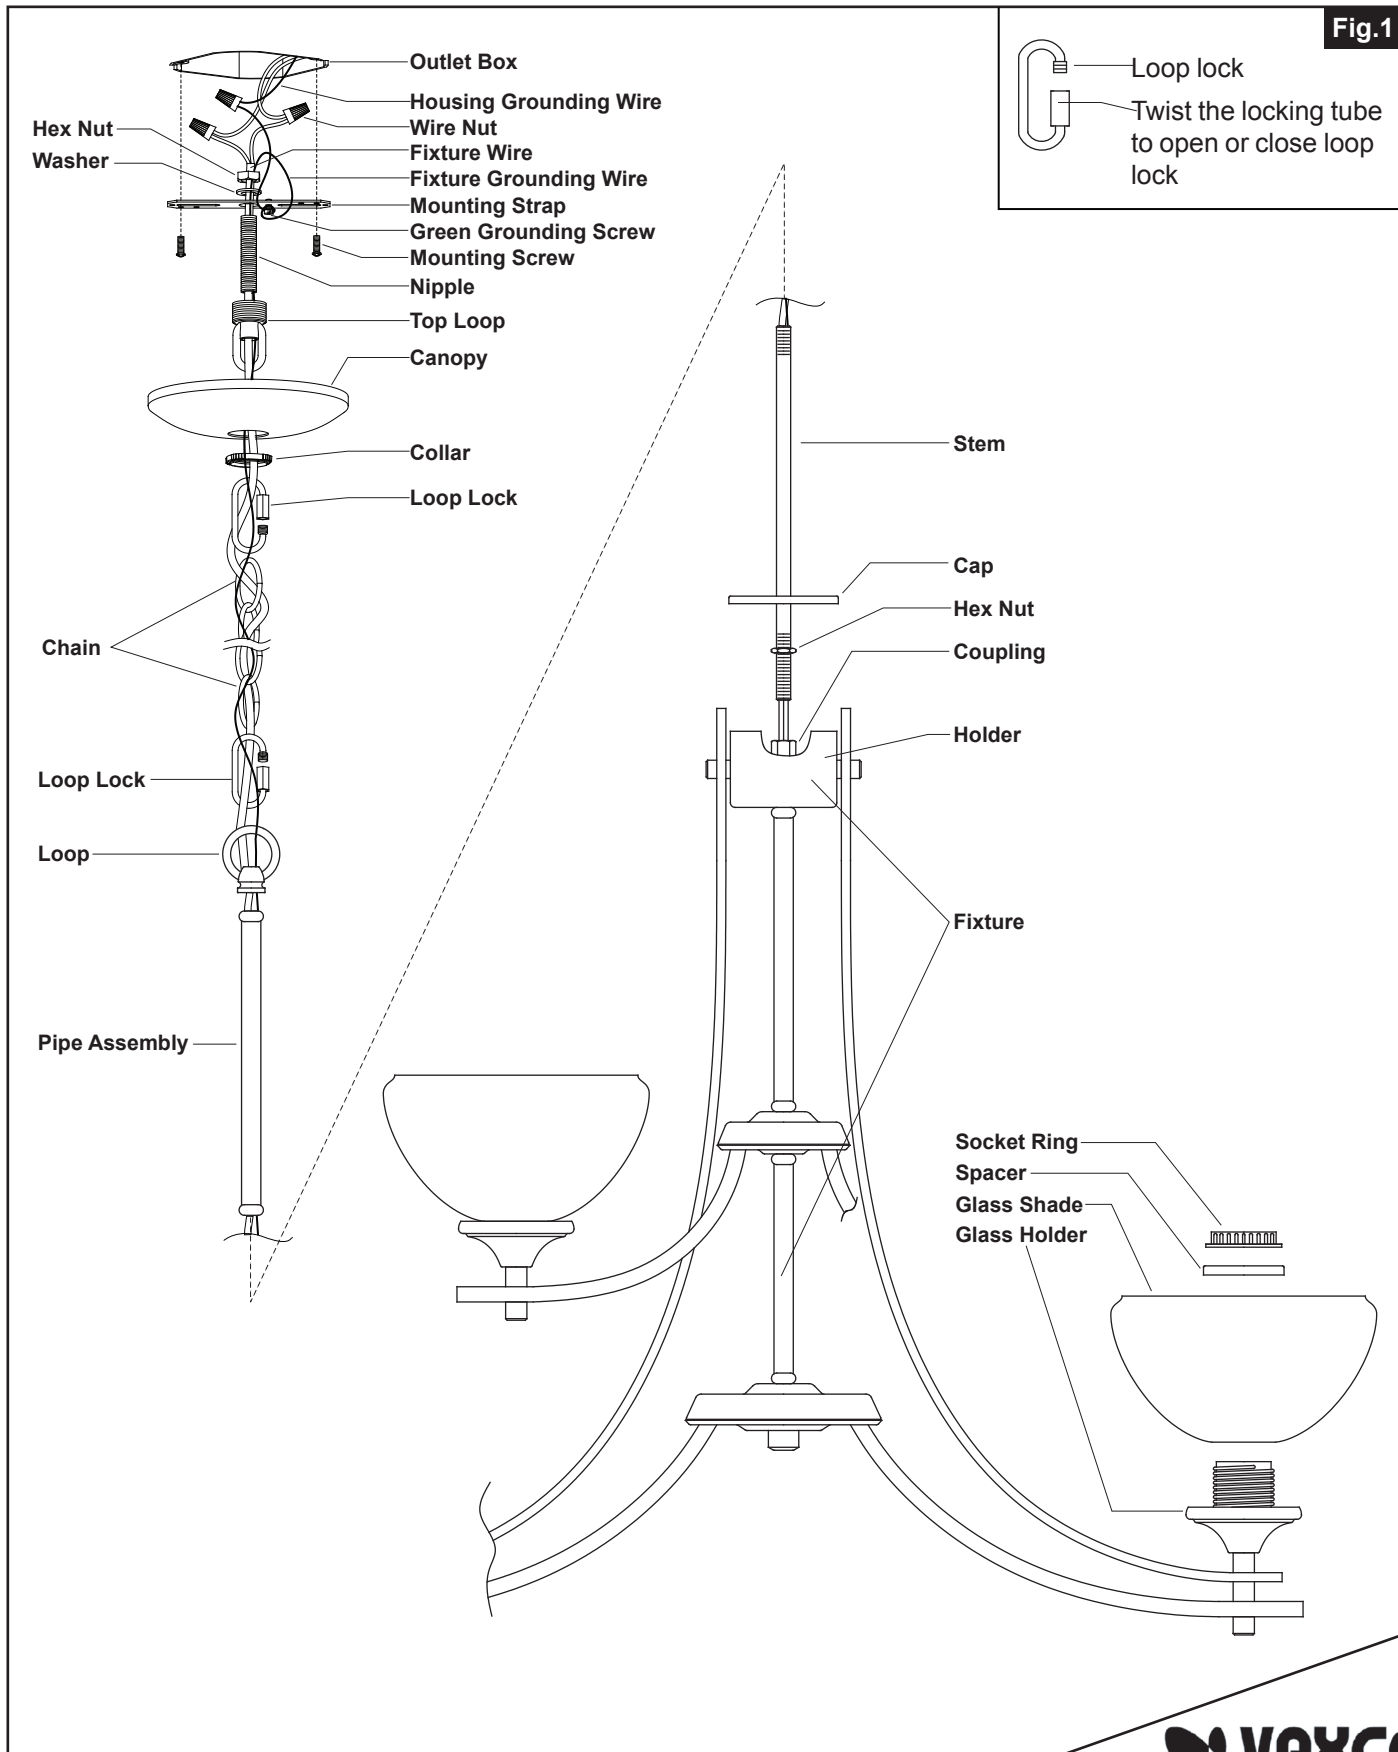

1. Attach the nipple to the mounting strap, then secure it with a washer and hex nut.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Secure the top loop to the nipple.
4. Screw the stem into the coupling of the holder, then secure it with a hex nut.
5. Slip the cap and pipe assembly down through the stem until the cap checks with the holder of the fixture, then secure them with the loop.
6. Choose the length of the chain you need, then weave the fixture wire and the fixture grounding wire through the chain, collar and canopy.
7. Connect one end of the chain with the loop by using a loop lock. (See Fig.1)
8. Connect the other end of the chain with the top loop by using another loop lock.
9. Thread the fixture wire and fixture grounding wire through the top loop, nipple and mounting strap.
10. Cut any excess fixture wires and fixture grounding wire leaving 10 inches above from the canopy (include the canopy). Slit the two fixture wires apart in 5 inches. Peel off insulation of the two wires in 5/8 inch.
11. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - The smooth wire (marked) from the fixture to the black wire from the power source.
 - The ridged wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.Carefully put the wires back into the outlet box.
12. Attach the canopy to the mounting strap by inserting the top loop, then secure it with the collar.
13. Attach the glass shades onto the glass holders, then secure them with spacers and socket rings.
14. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
15. Turn on the power at the main fuse or circuit breaker box.