


ASSEMBLY INSTRUCTIONS

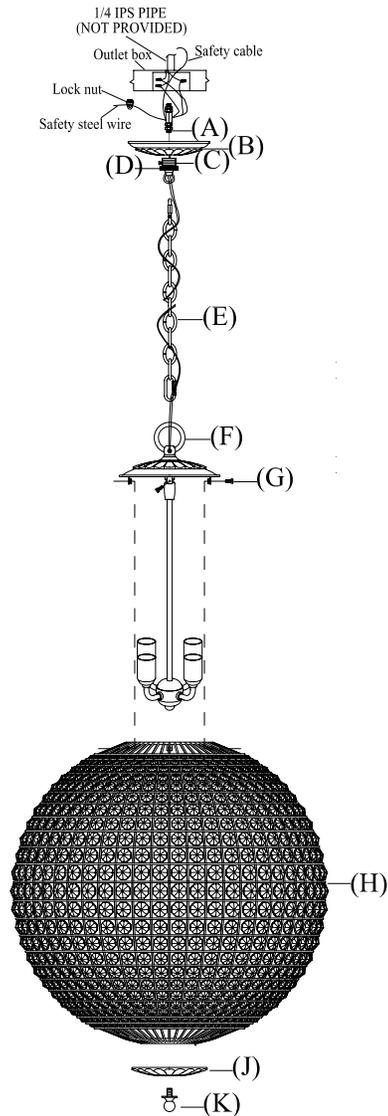

Renwick Large Sphere Pendant

Item # ARN5101

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**


INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Insert light bulbs into the sockets.
 2. Loosen screws (G), attach global shade (H) to (F), align the holes on global shade (H) and secure with screws (G).
 3. Place (J) to the bottom of glass shade (H), and secure with the final (K).
 4. Attach chain (E) to top loop (F) on lantern.
 5. Feed the wire through chain (E), mounting loop (C) and nipple (A).
 6. Unscrew canopy ring (D), slide canopy ring (D) and canopy (B) on chain (E).
 7. Connect the safety steel wire from the fixture and the safety cable from ceiling with lock nut. (See illustration A)
 8. Attach mounting loop (C) to thread nipple (A) using the ceiling loop screw.
 9. Open the end link of chain and screw chain mounting loop (C) to the nipple using set screw and hook the chain (E) to mounting loop (C) by closing the end cut link.
 10. Connect ground wire from the light fixture (bare copper) to ground wire green or copper in color). Fasten together with a plastic wire connector provided and tightly wrap the wire from ceiling outlet box (usually connector with electrical tape so the end of the connector is sealed).
- IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
11. Connect both hot wires (smooth wire) from the fixture to the hot junction box wire from ceiling outlet box (usually BLACK). Fasten together with a plastic wire connector provided and tightly wrap wire connector with electrical tape.



ASSEMBLY INSTRUCTIONS

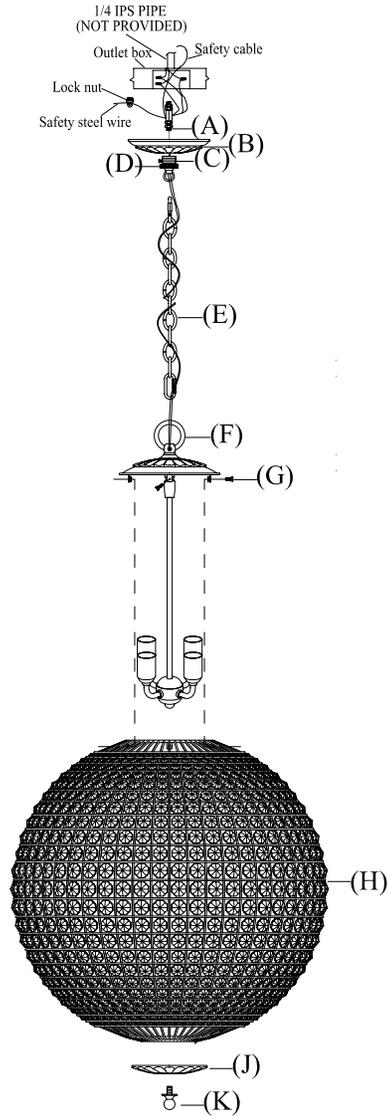

Renwick Large Sphere Pendant

Item # ARN5101

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

12. Repeat this procedure for the neutral wires (ribbed wire) from the light fixture to the wire from ceiling outlet box (usually WHITE).
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
13. Tuck wire connections neatly into ceiling outlet box.
14. Insert top thread nipple (A) in mounting 1/4 IPS pipe.
15. Slip canopy (B) to ceiling and secure with threaded canopy ring (D).
16. Now installation is complete. Return power to the junction box and test the fixture.