


ASSEMBLY INSTRUCTIONS

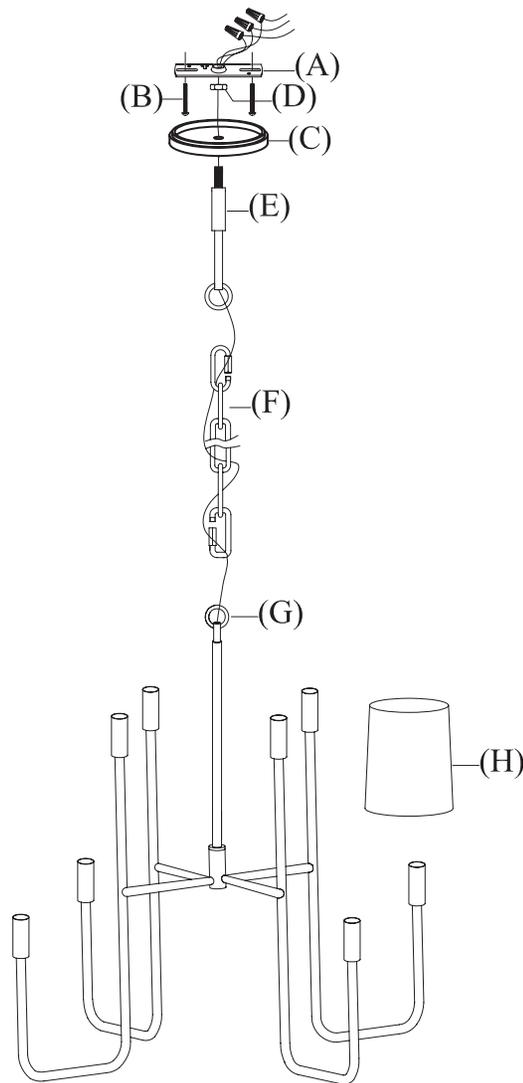

Medium Enamaled Chandelier

Item # BBL5081

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Attach chain (F) to top loop (G).
2. Attach chain (F) to bottom loop of connection rod (E).
3. Affix mounting strap (A) onto ceiling outlet box and secure with mounting screws (B).
4. Thread top nipple of connection rod (E) into the center hole of canopy (C) and secure with nut (D).
5. Attach the ground wire (bare wire) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
6. Connect the neutral wire from the fixture (ridges molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. BE SURE NO WIRE STRANDS ARE EXPOSED.
7. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
8. Attach canopy (C) to the affixed mounting strap (A), secure by threading the nipple of connection rod (E) to center hole of mounting strap (A).
9. Slide shades (H) onto the socket tubes.
10. Insert light bulbs (NOT INCLUDED) into the sockets.
11. Restore power and test fixture.



VISUAL COMFORT & Co. Est. 1987