

ASSEMBLY INSTRUCTIONS

Paris Flea Market Grande Chandelier


Item # CHC1508

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

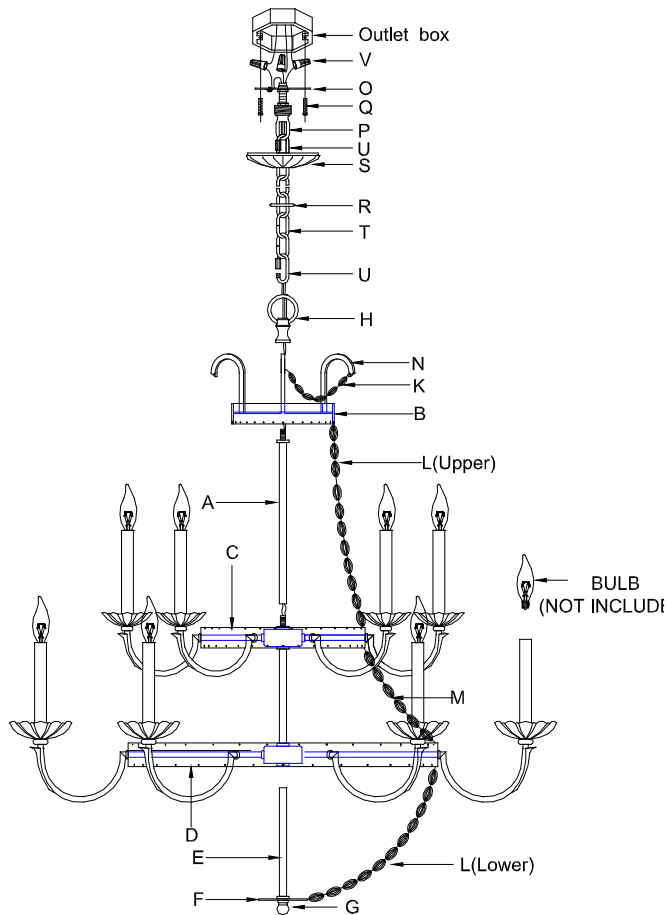

1. Insert the threaded pipe (A) with nut on both sides into top ring (B) and mid ring(C), then tighten.
2. Insert the bottom tube (E) with metal plate (F) and finial (G) into bottom ring (D) and tighten.
3. Thread top loop (H) to secure whole assembly fixture.
4. Install the crossbar (O) with ceiling loop (P) to outlet box by using mounting screws (Q) provided.
5. Loosen the lock collar(R) and raise the canopy(S) to ceiling loop (P), then thread lock collar(R) loosely to secure.
6. Using the dimensions of the fixture as a guide, shorten the chain (T) as needed using a pair of chain pliers.
7. Take into consideration that you will use the chain end link (U) to mount the chandelier once you have removed the excess chain.
8. Unscrew the threaded collar on the chain end link (U). Attach the chain end link to the ceiling loop (P).
9. Attach the chain (T), now desired length, to the chain end link (U). Close the threaded collar to secure the chain.
10. Unscrew the threaded collar on the other chain end link (U). Attach the chain end link to the lower end of the chain.
11. Carefully lift and hang the fixture assembly by the chain end link (U). Close the threaded collar on the chain end link to secure. Unwrap the wiring from the top of the fixture assembly.
12. Weave the power supply cord and the ground wire through the chain (T). When you reach the canopy(S) and ceiling loop (P), measure the wires and cut. Be certain to leave enough to connect inside the canopy.

ASSEMBLY INSTRUCTIONS

Paris Flea Market Grande Chandelier


Item # CHC1508

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

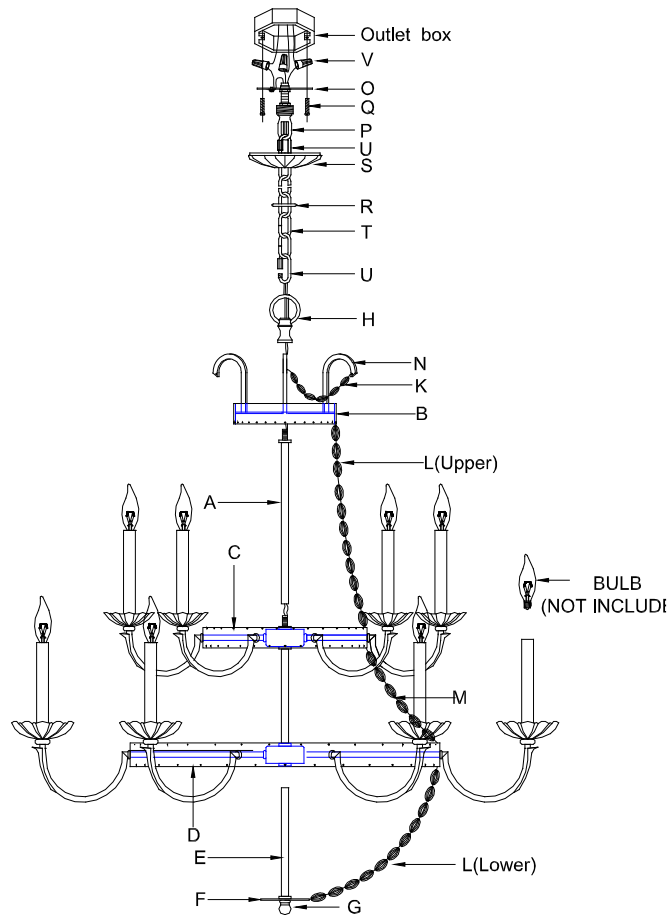

13. Strip the insulation back on the two power supply wires about 5/8". Twist the power supply and ground wires together and push through the center hole in the ceiling loop (P).
14. Loosen the lock collar(R) and slip the canopy(S) down the chain (T). Identify the hot wire from the fixture by feeling the edges. The hot wire is smooth and has words printed on it. The common wire is ribbed and has no words on it.
15. Attach the bare wire from the fixture to the bare wire from the building using the provided wire nut. If your house has no bare wire (ground) attach this wire to the green grounding screw inside the outlet box.
IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
16. Attach the common wire (ribbed, no words) from the fixture to the white wire from the building using the provided wire nut. Attach the hot wire (smooth, with words) from the fixture to the black wire from the building with the provided wire nut (V). Secure each connection by tightening and then checking that no wires can be pulled out.
IT IS IMPERATIVE THAT YOU NOT MIX THESE WIRES.
17. Wrap each connection individually with electrical tape. Neatly tuck the connections into the outlet box.
18. Install the canopy(S) and secure with the lock collar(R).
19. At this point, connect the electrical wires as shown in Fig.3 making sure all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise connect fixture's ground wire directly to the junction box.
20. Tuck these wire connections neatly into the ceiling junction box.
21. Raise the lock collar and thread onto ceiling loop protruding through canopy.

ASSEMBLY INSTRUCTIONS

Paris Flea Market Grande Chandelier


Item # CHC1508

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

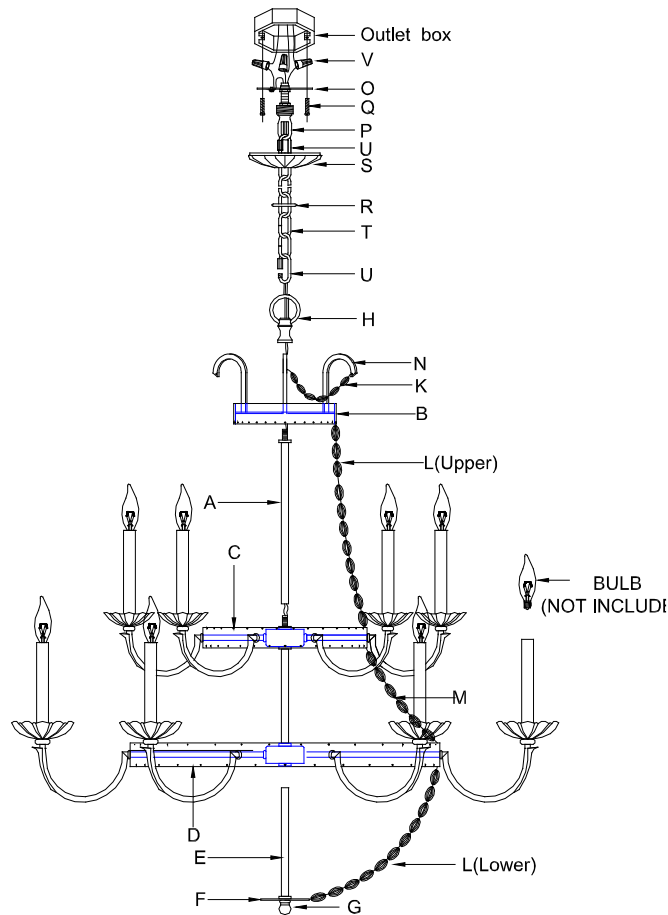

22. Hang all glass beads into steel wire rings (J) as shown in the diagram. You should have:
- Glass beads (K), 6 strands, 6 beads per strand, and hang between top hooks (N).
 - Glass beads (L), 64 strands, and 11 beads per strand. 32 strips hang to top ring (B) and mid ring(C), 32 strips between bottom ring (D) and metal plate (F).
 - Glass beads (M), 32 strands, 6 beads per strand, and hang between mid ring(C) and bottom ring (D).

NOTE: Item includes glass trim which is intended to only fill half of the space. Additional trim is available for purchase.

23. Install light bulbs (not included) into each socket.
24. Restore power and enjoy your new chandelier.