


S2602

ASSEMBLY & INSTALLATION GUIDE

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

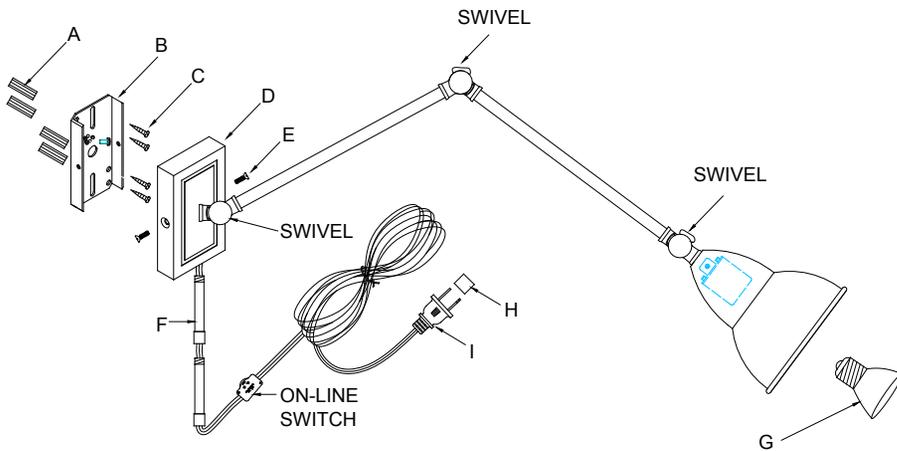

1. Remove the mounting plate(B) from the back plate(D).
2. Install plastic anchors(A) provided into wall.
3. Attach mounting plate(B) to wall with screws(C) provided.
4. Attach the ground wire from the fixture to the ground wire from the building using the provided wire nut. If you house has no bare wire (ground) attach this wire to the green grounding screw inside the outlet box.
5. IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
6. Attach the common wire (ribbed, no words) from the fixture to the white wire from the building using the provided wire nut.
7. Attach the hot wire (smooth, with words) from the fixture to the black wire from the building with the provided wire nut. IT IS IMPERATIVE THAT YOU NOT MIX THESE WIRES.
8. Secure back plate(D) to mounting plate(B) with flat head screws(E) provided.
9. Thread cord cover(F) into the hole on the bottom of back plate(D).
10. Install lamp bulb (G) (not included) into socket.
11. Remove the protective plug cover(H) from the plug(I).
12. Restore power and enjoy your new pendant.
13. ADJUSTMENT INSTRUCTIONS.
 1. Loosen the adjustment keys on the swivel joints.
 2. Adjust arm segments and shade to suit.
 3. Tighten the adjustable keys.