

ASSEMBLY INSTRUCTIONS

Griffith Swing Arm


Item # SK2109

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

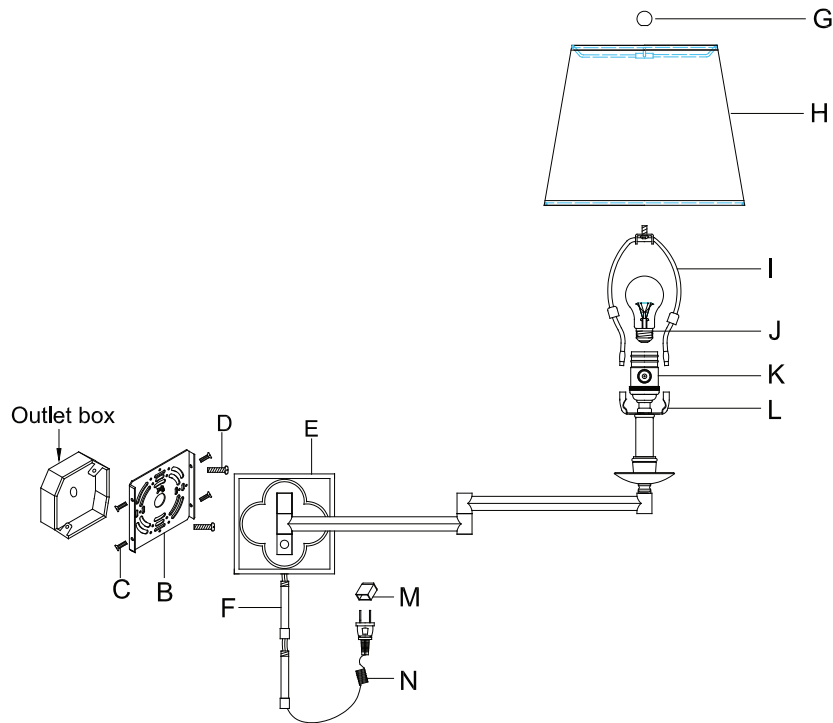

1. Carefully remove the mounting plate (B) from the back plate (E) by removing side screws (C).
2. Secure the mounting plate (B) to the outlet box in your wall using the two mounting screws (D).
3. Secure back plate (E) to mounting plate (B) with flat head screws (D).
4. Thread cord cover (F) into the hole on the bottom of backplate (E).
5. Attach harp (I) to saddle (L).
6. Attach shade (H) (sold separately) to harp (I) and secure with finial (G).
7. Remove red protective plug cover (M) from plug (N).
8. Install lamp bulb (J) (not included) into socket.
9. Restore power and enjoy your new lamp.

