
ASSEMBLY INSTRUCTIONS







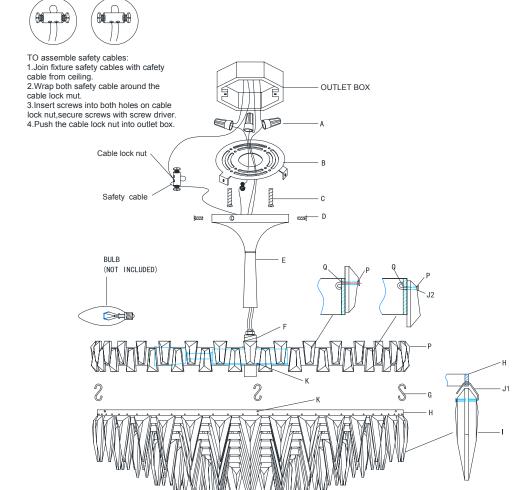

Trillion Large Flush Mount

Item # SN4001

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING *** SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

- 1. Make metal string (J2) through crystal hole (P) then go through the hole (Q) and tuck the metal strings together like the drawing.
- 2. Thread the top pole (E) on to the thread of ring (F)
- 3. Secure the mounting plate (B) to the outlet box with outlet box screws (C).
- 4. Attach the ground wire from the fixture to the ground wire from the building using the provided wire nut (A). If your house has no bare wire (ground) attach this wire to the green grounding screw inside the outlet box.
 - IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED
- 5. Attach the common wire (ribbed, no words) from the fixture to the white wire from the building using the provided wire nut (A).
- 6. Attach hot wire (smooth, with words) from the fixture to the black wire from the building with the provided wire nut (A).
- 7. Secure each connection by tightening and then checking that no wires can be pulled out.
 - IT IS IMPERATIVE THAT YOU NOT MIX THESE WIRES.
- 8. Wrap each connection individually with electrical tape, if necessary.
- 9. Neatly tuck the connections into the outlet box.
- 10. Install the canopy (E) to the mounting plate (B) and secure with flat head screws (D).
- 11. Make each metal string to cross crystal (I) through the holes, then make the metal string (J1) into the ring (H) as shown in the drawing, then tuck the string after hanging all crystals. Please secure each string carefully.
- 12. Attach ring (H) to top ring by "A" hook. Install lamp bulbs (not included)
- *** Clean with dry, soft cloth only. Do not use harsh abrasives or chemical agents.

