


ASSEMBLY INSTRUCTIONS

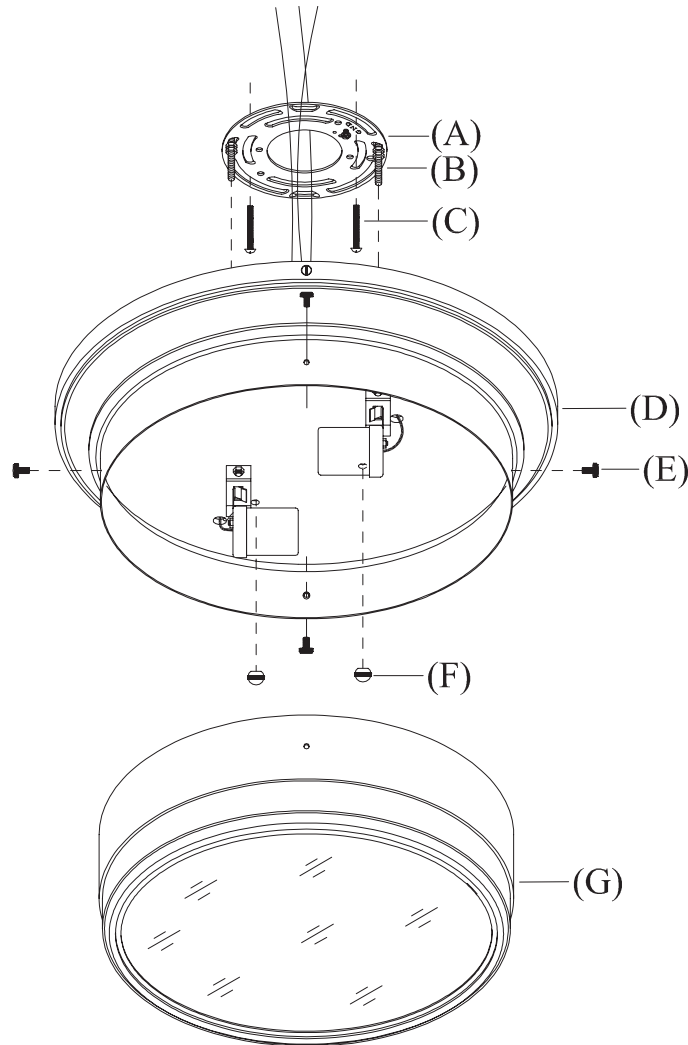

Siena Small Flush Mount

Item # SS4015

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Remove mounting plate (A) from fixture base (D) by unscrewing cap nuts (F) and set aside.
2. Affix mounting plate (A) onto ceiling outlet box and secure with mounting screws (C).
3. Connect ground wire from the light fixture (bare copper) to ground wire from ceiling outlet box (usually green or copper in color). Fasten together with a plastic wire connector provided and tightly wrap the wire connector with electrical tape so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
4. Connect both hot wires from the fixture (BLACK) to the hot junction box wire from ceiling outlet box (usually BLACK). Fasten together with a plastic wire connector provided and tightly wrap wire connector with electrical tape.
5. Repeat this procedure for the WHITE neutral wires from the light fixture to the wire from ceiling outlet box (usually WHITE). DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
6. Attach fixture base (D) to affixed mounting plate (A), letting rods (B) pass through the holes on fixture base (D), and secure with cap nuts (F).
7. Install bulb of correct type and wattage. See label on lamp.
8. Loosen thumbscrews (E) and attach glass shade (G) to fixture base (D) by aligning the holes of fixture base (D) with glass shade (G) and tighten with thumbscrews (E).