

TOB5007


ASSEMBLY & INSTALLATION GUIDE

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

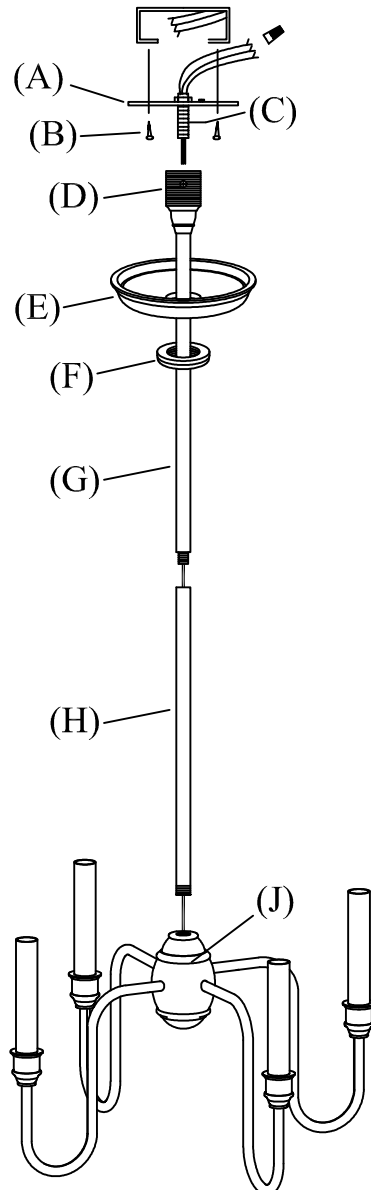

1. Thread pole (H) into top threaded opening of ball (J).
2. Thread pole (G) into top threaded opening of pole (H).
3. Remove mounting strap (A) with threaded nipple (C) from pole (G), and attach it to the outlet box with screws (B).
4. Connect the neutral (RIBBED, without any marking) fixture wire coming from the mounting loop (D) to the neutral (usually white) outlet wire. Fasten both wires together with a plastic wire connector and tightly warp the wire connector with electrical tape.
5. Repeat this procedure with the hot (ROUND, with UL marking on) wires. Always make sure that no wire strands are left outside the connector. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
6. Connect the ground wire from back plate assembly (bare copper) to the ground wire from the outlet box. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
7. Slip canopy (E) and canopy ring (F) over the mounting loop (D), and thread mounting loop (D) onto threaded nipple (C) and covered with canopy (E) and canopy ring (F).
8. Insert light bulbs into sockets.