
## **ASSEMBLY INSTRUCTIONS**







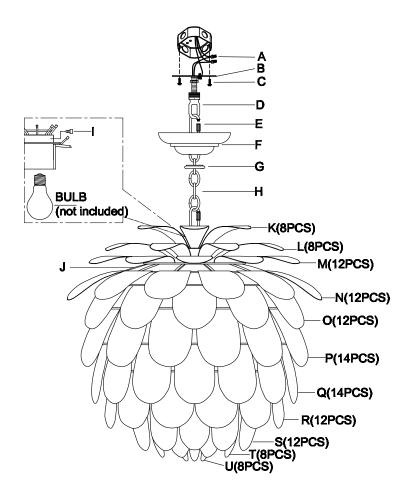

## Cynara Large/Medium Chandelier

Item # CHC 5157/ CHC 5165

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.


ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

- Carefully remove all parts from the box.
- 2. Install the crossbar (B) with ceiling loop (D) to the outlet box by mounting screws (C) provided.
- Unscrew the threaded collar (E) on the chain end and attach it to top ring of fixture (J).
  Close the threaded collar to secure the fixture (J).
- 4. Let canopy (F) and lock collar (G) go through the chain (H).
- 5. With the fixture dimension as a guide, shorten the chain (H) as needed using a pair of chain pliers.
- Unscrew the threaded collar (E) on the other chain end, raise the fixture (J) then attach the threaded collar (E) to the ceiling loop (D). Close the threaded collar (E) to secure.
- 7. Unwrap the wiring from the top of fixture (J). Weave the power supply cord and Pass the cord through the lock collar (G),canopy (F) and ceiling loop (D).
- 8. Connect the fixture ground (bare) wire with the ground wire from the outlet box using
- wire nuts (A). If your house does not have ground wire, then attach this wire to the green grounding screw inside of the outlet box.
- IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
- Connect the fixture Neutral wire (ribbed, no markings) with the neutral wire from the outlet box using wire nuts (A).
- Connect the fixture Hot (smooth edge,markings) wire with the hot wire from the outlet Box using wire nuts (A).
  - DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- 11. Tuck these wire connections neatly into the outlet box to secure.
- 12. Put canopy (F) to the ceiling loop (D), and secure with lock collar (G).
- 13. Unscrew the socket neck from fixturue (J) by knurled screws (G).
- 14. Install the bulb (not included) into the socket.



## **ASSEMBLY INSTRUCTIONS**

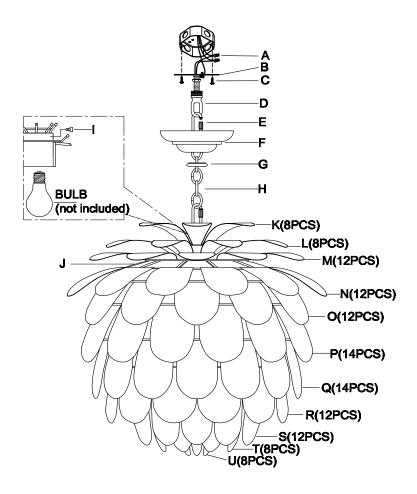



WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

16. Secure the socket into the fixture (J) by knurled screws (I).

- 17. Attach the each size metal leaf (K, L, M, N,O, P, Q, R, S, T, U) to the horizonal frame of each layer from top and bottom individually.
- 18. Installation is complete, turn on power at fuse or circuit breaker.

\*\*\*Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.



