


# RL5080

## ASSEMBLY & INSTALLATION GUIDE

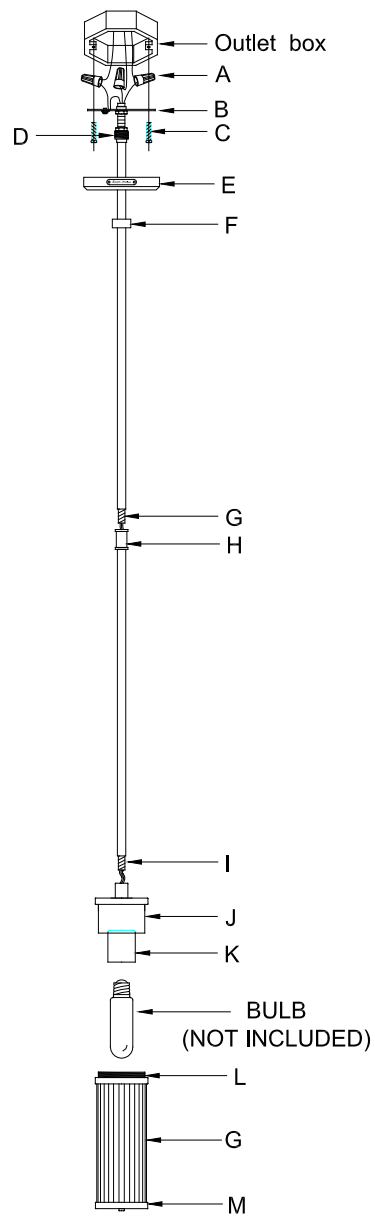

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

1. Carefully remove all parts from box.
  2. Install the crossbar (B) with ceiling loop (D) to outlet box by using mounting screws(C) provided.
  3. Put canopy (E) to ceiling loop, and secure with lock collar (F).
  4. Cut the cord & ground wire up through 15" length beyond the canopy.
  5. Pull the cord & ground wire carefully up into the outlet box.
  6. Separate the two cords carefully and identify the Hot & Neutral wire.
  7. Attach the ground wire from the fixture (Green or bare copper) to ground wire from outlet box with plastic wire connector (A). Connect the Hot wire from the fixture (Black) to the hot wire from outlet box. Fasten them together with a plastic wire connector (A)
  8. Repeat this procedure for the White neutral wire from the light fixture to the wire from outlet box .
  9. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS, OTHERWISE SAFETY WILL BE COMPROMISED.**
- Twist the wire connection neatly into ceiling outlet box.
10. Slip canopy (E) to ceiling and secure with threaded canopy ring (F).
  11. Thread connector (H) to pipe (G).
  12. Thread fixture (J) to pipe (I)
  13. Insert light bulb (Not included) into the socket (K)
  14. Secure the glass frame(G) on the fixture(J)
  15. Assembly is complete.

R A L P H L A U R E N