






OUTDOOR CYLINDERS SMALL ONE & TWO-LIGHT LED WALL LANTERNS

8313897S; 8413897S

General Product Information




Product Warranty



FCC Statement

Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

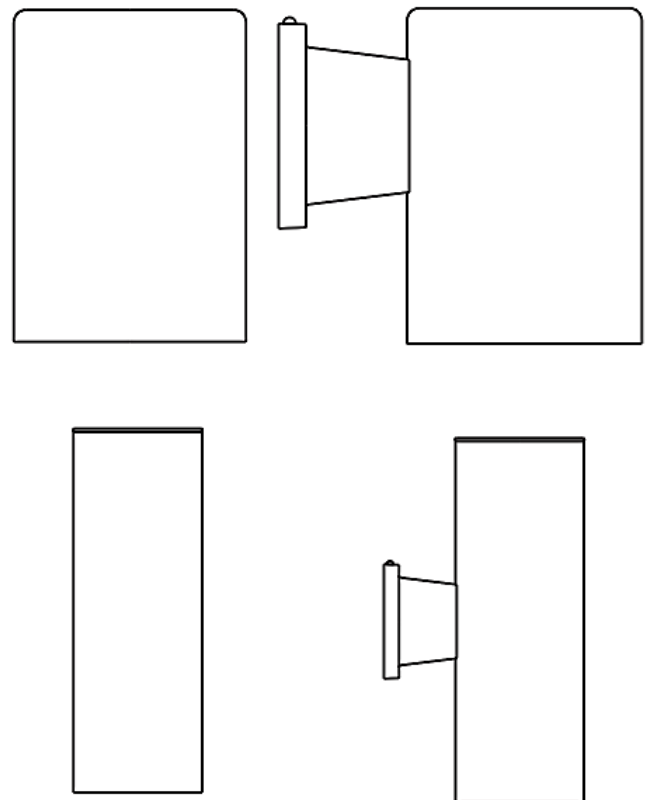

FIXTURE PARTS

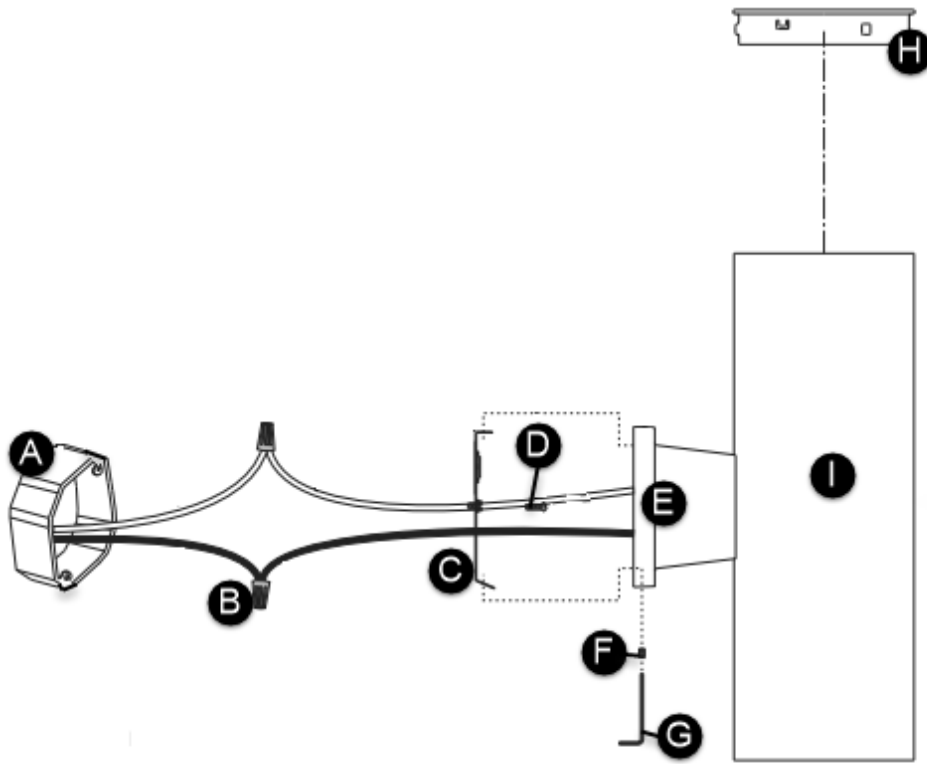

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Mounting Screws
- E. Fixture Base
- F. Set Screws
- G. Allen Wrench
- H. Diffuser
- I. Fixture

INSTRUCTIONS

I. Preparing the Fixture

1. Secure the mounting plate to the junction box with two mounting screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black, smooth) to hot power line wire
 - b) Neutral fixture wire (white, textured) to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Mount the fixture base onto the mounting plate and secure it by installing the set screws using an Allen wrench.
2. If applicable, install the diffuser by pushing it into the fixture until it snaps into place.
3. For wet locations, caulk around the base of the fixture with waterproof construction sealant.