

EXO

FAMILY

The Exo family offers a variety of solutions with a perfect balance of function and fashion, where surface-mounted downlights are preferred. With options ranging from a simple cube to an elongated rectangular shade, the Exo family is the ultimate in minimalist form with a specification-grade, multifunction downlight. Each LED module's high-performance output is harnessed by your choice of four field-changeable optics ranging from a 20° beam for task lighting to a 60° beam for general illumination. Integrated 0°-35° tool-free beam aiming offers additional precision control.


Each LED module produces 1047 delivered lumens while consuming 14 watts, and is offered in 2700K, 3000K and 3500K. Light output is harnessed by 20°, 30°, 40° or 60° field changeable optics, and each fixture includes a 120-277V driver which is dimmable (ELV, TRIAC and 0-10V) for maximum flexibility.

Product features:

- Three shade sizes for maximum design and performance flexibility
- Complementary pendant and flush mount versions available
- Specification-grade beam spread options for spot to general illumination applications
- Unique tool-free aiming for incredible versatility
- Universally dimmable LED lamping options to create the desired ambiance
- Matte Black and Matte White finish options
- Three decorative trim options for a custom look
- 5-year warranty

SPECIFICATIONS

SHADE HEIGHT	6.1", 18" options
SHADE WIDTH	5.2"
SHADE LENGTH	5.2" single / 10.4" dual
DELIVERED LUMENS	1047 single / 1635 dual
WATTS	14 single / 28 dual
VOLTAGE	Universal 120V-277V
DIMMING	Universal 0-10V, ELV, TRIAC
LIGHT DISTRIBUTION	20°, 30°, 40°, 60° field changeable optics
MOUNTING OPTIONS	Ceiling (flush, 12", 24", 36", 48" stem) Pendant: Integrated ball joint that accommodates sloped ceilings up to 45°
ADJUSTABILITY	Spot module: 35° tilt and 360° rotation with tool-free locking
CCT	2700K, 3000K, 3500K
CRI	90+
COLOR BINNING	3-Step
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Steel
FINISH	Matte Black, Matte White
TRIM	Black, White, Gold Haze
LED LIFETIME	50,000 to L70
WARRANTY*	5 years



EXO DUAL
shown in
Matte Black/Gold Haze



EXO PENDANT
shown in
Matte White/Black 6"




EXO CEILING
shown in
Matte White/White 18"

* Visit visualcomfort.com for specific warranty limitations and details.

EXO

FAMILY

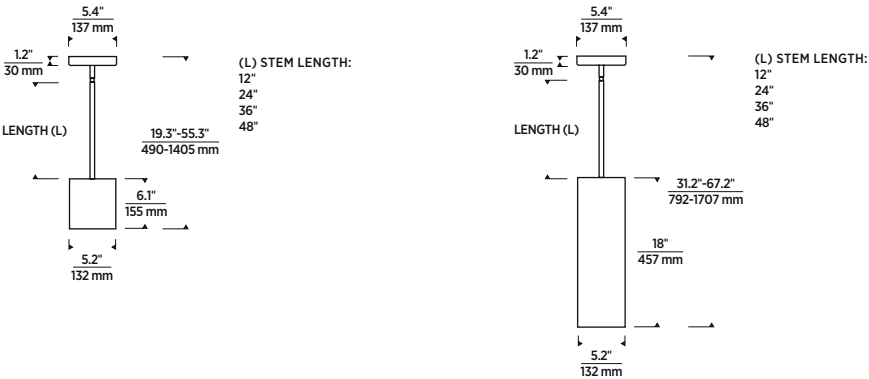

Matte Black/
Black
6"



Matte Black/
Black
18"



Matte White/
Black
6"



Matte White/
Black
18"



Matte Black/
Gold Haze
6"



Matte Black/
Gold Haze
18"



Matte White/
Gold Haze
6"



Matte White/
Gold Haze
18"



Matte Black/
White
6"



Matte Black/
White
18"





Matte White/
White
6"



Matte White/
White
18"

EXO

FAMILY



Matte Black/
Black
6"




Matte Black/
Black
6"



Matte White/
Black
6"




Matte White/
Black
6"



Matte Black/
Gold Haze
6"



Matte Black/
Gold Haze
18"



Matte White/
Gold Haze
6"



Matte White/
Gold Haze
18"



Matte Black/
White
6"



Matte Black/
White
18"




Matte White/
White
6"



Matte White/
White
18"

EXO

FAMILY




PHOTOMETRICS

EXO SINGLE PENDANTS AND CEILING

Description:	LED Multiples Module 40° Beam - 0° Tilt, 3000K
Model:	LED Multiples 40° Low
Input Power (Watts):	12.4
Input Power Factor:	0.98
Absolute Luminous Flux (Lumens):	1056
Lumen Efficacy (Lumens per Watt):	85.2

ANGLE	0°	45°	90°
0°	2188	2188	2188
5°	2137	2136	2106
10°	1956	1938	1893
15°	1633	1608	1536
20°	1206	1175	1082
25°	736	705	632
30°	377	362	318
35°	179	174	151
40°	82	81	74
45°	42	42	39
50°	24	23	22
55°	14	13	12
60°	8	8	8
65°	5	5	5
70°	2	2	2
75°	1	0	0
80°	0	0	0
85°	0	0	0
90°	0	0	0

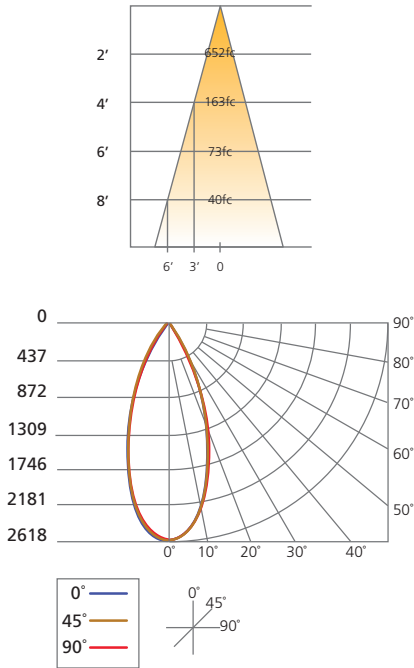

EXO

FAMILY

ORDERING INFORMATION

EXO PENDANTS

PRODUCT	SHADE HEIGHT		STEM LENGTH (A)		BEAM SPREAD		SHADE COLOR / HARDWARE FINISH		TRIM FINISH	LAMP	
700TDEXOP	6	6.1"	12	12"	20	20°	B	MATTE BLACK	B BLACK	-LED927	LED 90 CRI 2700K 120V 277 UNV
	18	18"	24	24"	30	30°	W	MATTE WHITE	G GOLD HAZE	-LED930	LED 90 CRI 3000K 120V 277 UNV
			36	36"	40	40°			W WHITE	-LED935	LED 90 CRI 3500K 120V 277 UNV
			48	48"	60	60°					

EXO CEILING

PRODUCT	SHADE HEIGHT		BEAM SPREAD		SHADE COLOR		TRIM FINISH	LAMP	
700FMEXO	6	6.1"	20	20°	B	MATTE BLACK	B BLACK	-LED927	LED 90 CRI 2700K 120V 277 UNV
	18	18"	30	30°	W	MATTE WHITE	G GOLD HAZE	-LED930	LED 90 CRI 3000K 120V 277 UNV
			40	40°			W WHITE	-LED935	LED 90 CRI 3500K 120V 277 UNV
			60	60°					

EXO DUAL

PRODUCT	SHADE HEIGHT		BEAM SPREAD		SHADE COLOR		TRIM FINISH	LAMP	
700FMEXOD	6	6.1"	20	20°	B	MATTE BLACK	B BLACK	-LED927	LED 90 CRI 2700K 120V 277 UNV
			30	30°	W	MATTE WHITE	G GOLD HAZE	-LED930	LED 90 CRI 3000K 120V 277 UNV
			40	40°			W WHITE	-LED935	LED 90 CRI 3500K 120V 277 UNV
			60	60°					

LENSES/LOUVERS

PRODUCT	TYPE		FINISH
MOC	GG	PLAIN GLASS	-B BLACK
	SF	SOFT FOCUS	-W WHITE
	LL	LINEAR SPREAD	
	EC	EGGCRATE LOUVER	
	LS1	1" LONG SNOOT	
	LS12	1/2" LONG SNOOT	

REPLACEMENT OPTICS

PRODUCT	BEAM SPREAD	
353LEDGATOPT	20	20°
	30	30°
	40	40°
	60	60°

PROJECT INFO

FIXTURE TYPE & QUANTITY		JOB NAME & INFO	NOTES