

LOW - VOLTAGE PENDANTS

Melrose II Pendant



DESCRIPTION


The contemporary glass shade of the Melrose II light from Tech Lighting is made of beautifully transparent glass features a graceful shape and conical inner diffuser with a machined metal detail. Includes with 35 watt halogen bi-pin or 8 watt, 300 delivered lumen, 3000K, replaceable SORAA® LED module and six feet of field-cutable cable. Dimmable with low-voltage electronic or magnetic dimmer (based on the transformer). Works with SORAA.

INSTALLATION

Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system. For use on T~TRAK, order FreeJack version and T~TRAK FreeJack Connector (sold separately).

ACCESSORIES & OPTICAL CONTROLS

SORAA® LED Bi-Pin Replacement Pendant Module, Swag Hook

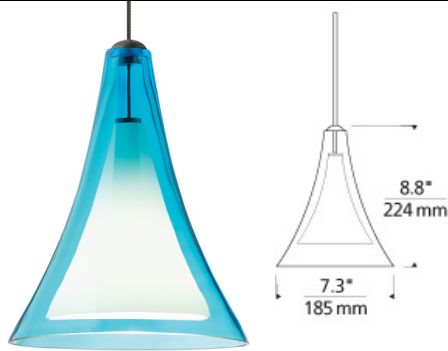

aqua

clear

smoke

ORDERING INFORMATION

700	SYSTEM	MLP	COLOR	FINISH	LAMP
FJ	FREEJACK		Q AQUA	Z ANTIQUE BRONZE	12 VOLT HALOGEN
MP	MONOPOINT		C CLEAR	C CHROME	-LEDS830 12 VOLT LED 80 CRI 3000K
MO	MONORAIL		K SMOKE	S SATIN NICKEL	-24 24 VOLT HALOGEN
MO2	TWO-CIRCUIT MONORAIL				

Note: MP includes 4" Round Flush Canopy.

Chrome not available on Monorail or Two~Circuit Monorail.

TECH LIGHTING®
 7400 Linder Avenue T 847.410.4400
 Skokie, Illinois 60077 F 847.410.4500
Tech Lighting, L.L.C.

700

FIXTURE: _____

TYPE: _____

JOB NAME: _____

NOTES: _____

