

Understated modern design characterizes Tegel outdoor LED wall sconces. Providing well-controlled up and down lighting, or down light only, these wall sconces provide accent and ambient illumination. The option of three finish choices ensures this design profile successfully blends with all architectural aesthetics.

### High quality LM80-tested LEDs

for consistent long-life performance and color

### Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Impact-resistant, UV stabilized frosted acrylic lensing
- Up light and down light options, with 10° and 36° beam spread options

### SPECIFICATIONS

DELIVERED LUMENS	2346 Up-Downlight / 1212 Downlight
WATTS	29.2 Up-Downlight / 15.6 Downlight
VOLTAGE	Universal 120V-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric Up/Down Lighting, or Down Only
MOUNTING OPTIONS	Wall
OPTICS	10° and 36°
PERFORMANCE OPTIONS	Photocontrol / Surge Protector
CCT	2700K, 3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	Up-Downlight B1-U5-G0 / Downlight B1-U0-G0
DARK SKY	Compliant (Downlight)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	6.6 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

### ORDERING INFORMATION

7000WTEG	CRI/CCT	LENGTH	BEAM SPREAD*	LENS	FINISH	FUNCTION	VOLTAGE	OPTIONS
<b>827</b>	80 CRI, 2700K	<b>12</b> 12"	<b>N</b> 10° NARROW	<b>C</b> CLEAR	<b>B</b> BLACK	<b>DO</b> DOWNLIGHT ONLY	<b>UNV</b> 120V-277V	<b>NONE</b>
<b>830</b>	80 CRI, 3000K		<b>W</b> 36° WIDE		<b>Z</b> BRONZE	<b>UD</b> UPLIGHT/DOWNLIGHT		<b>PC</b> NONE
<b>840</b>	80 CRI, 4000K		<b>NN</b> 10° UP AND DOWN		<b>H</b> CHARCOAL			<b>SP</b> BUTTON PHOTOCONTROL SURGE PROTECTION
			<b>WW</b> 36° UP AND DOWN		<b>Y</b> GRAY			<b>PCSP</b> BUTTON PHOTOCONTROL & SURGE PROTECTION
			<b>NW</b> 10° AND 36°					

\*N, W = DOWNLIGHT ONLY (DO); NN, WW, NW = UP AND DOWNLIGHT ONLY (UD)



TEGEL 12  
shown in bronze




TEGEL 12  
shown in charcoal



TEGEL 12  
shown in gray

# TEGEL 12 WALL SCONCE

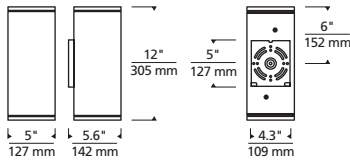

Tegel 12

## PHOTOMETRICS\*



\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### TEGEL 12 UP/DOWN

Total Lumen Output: 2346  
 Total Power: 29.2  
 Luminaire Efficacy: 80.2  
 Color Temp: 3000K  
 CRI: 80+  
 BUG Rating: B1-U5-G0

### TEGEL 12 DOWN

Total Lumen Output: 1212  
 Total Power: 15.6  
 Luminaire Efficacy: 77.7  
 Color Temp: 3000K  
 CRI: 80+  
 BUG Rating: B1-U0-G0

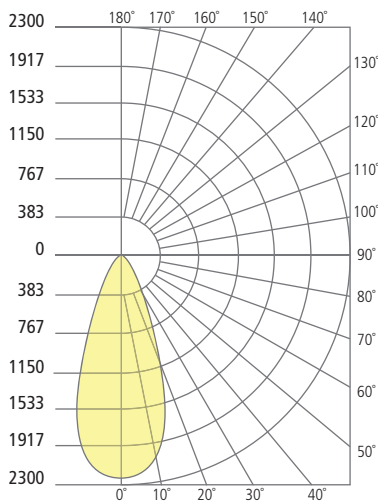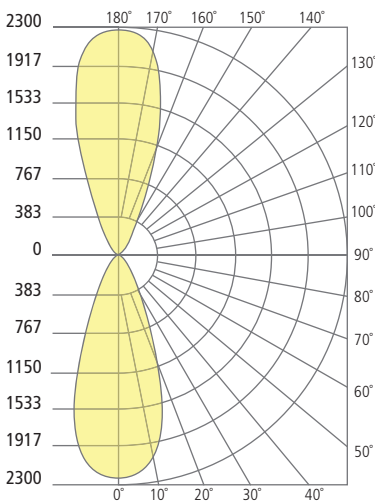

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



GENERATION BRANDS  
 7400 Linder Avenue, Skokie, Illinois 60077  
 T 847.410.4400 F 847.410.4500