

Exo Pendant**700TDEXOP_****1.0****VISUAL COMFORT & Co.****MODERN COLLECTION****GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product is suitable for damp locations.

This product can be dimmed with a low-voltage electronic dimmer, 0-10V dimmer or TRIAC dimmer.

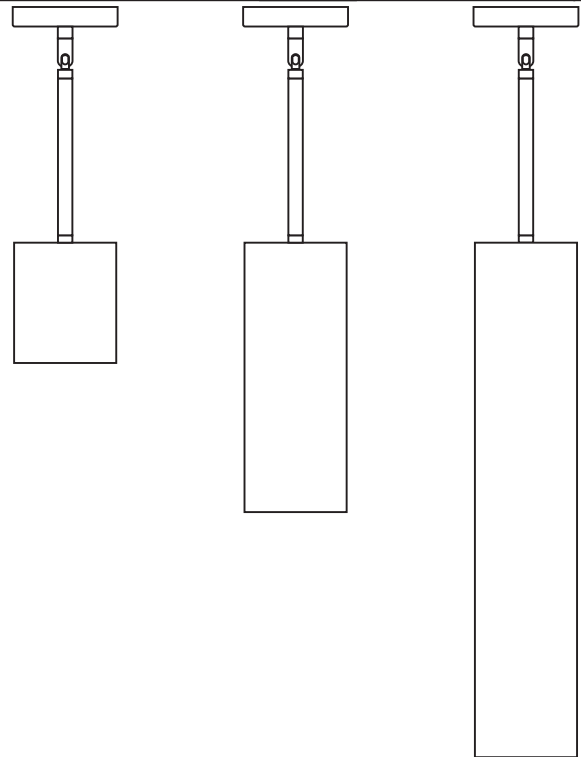
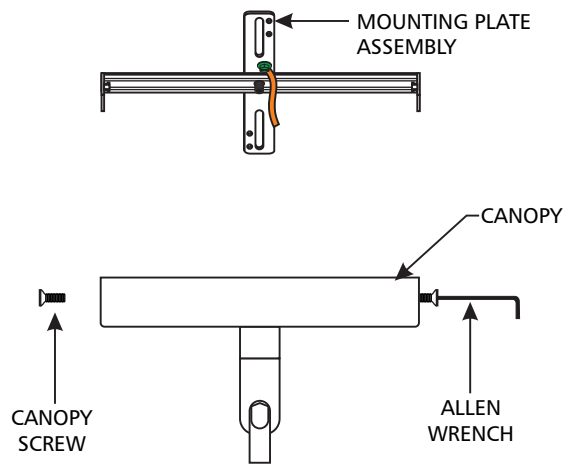
This instruction shows a typical installation.

CAUTION - RISK OF FIRE

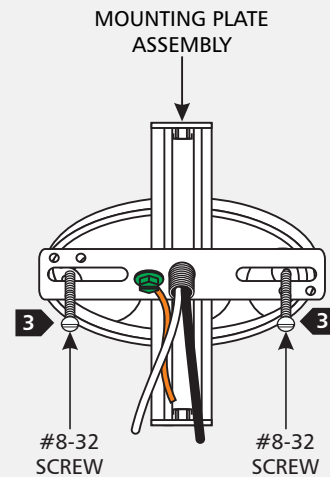
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

Two Person Installation Recommended

**Install the Mounting Plate****1A**

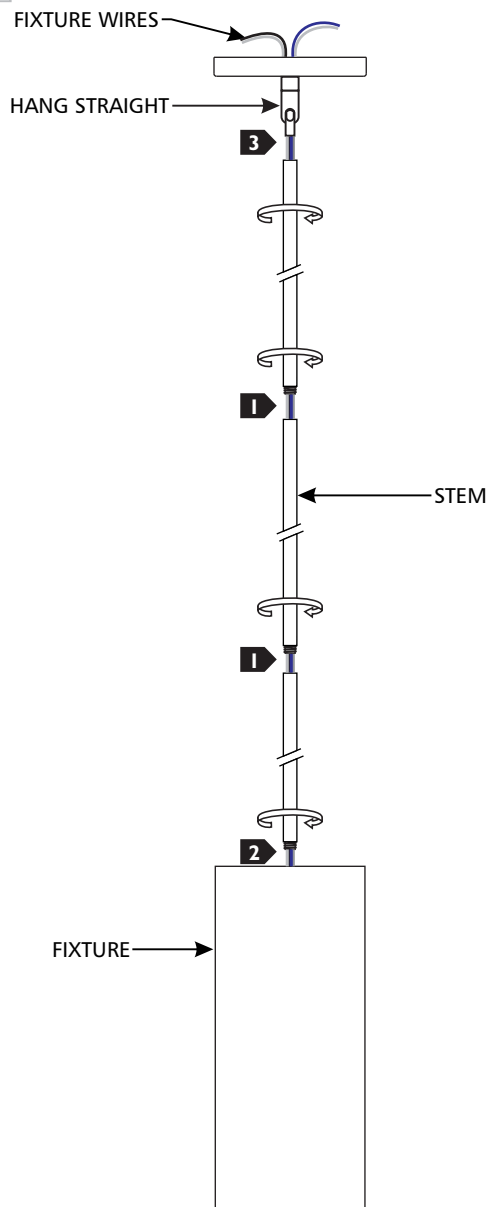
- 1** Remove the canopy screws using the provided Allen Wrench.
- 2** Remove the mounting plate from the canopy.

1B

- 3** Secure the mounting plate to the electrical box with the #8-32 screws provided.

Assemble the Fixture

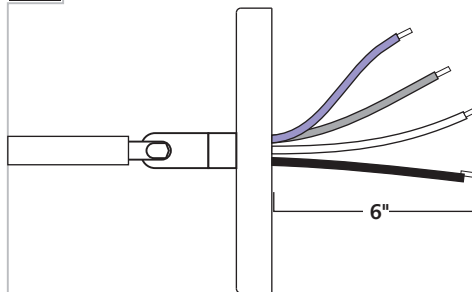
2A



- 1 Determine desired length of fixture using the provided stems and assemble them by screwing them together.
- 2 Feed the fixture wires through the stem assembly and screw it to the fixture.
- 3 Feed the fixture wires through the hang straight and screw it onto the stem assembly.

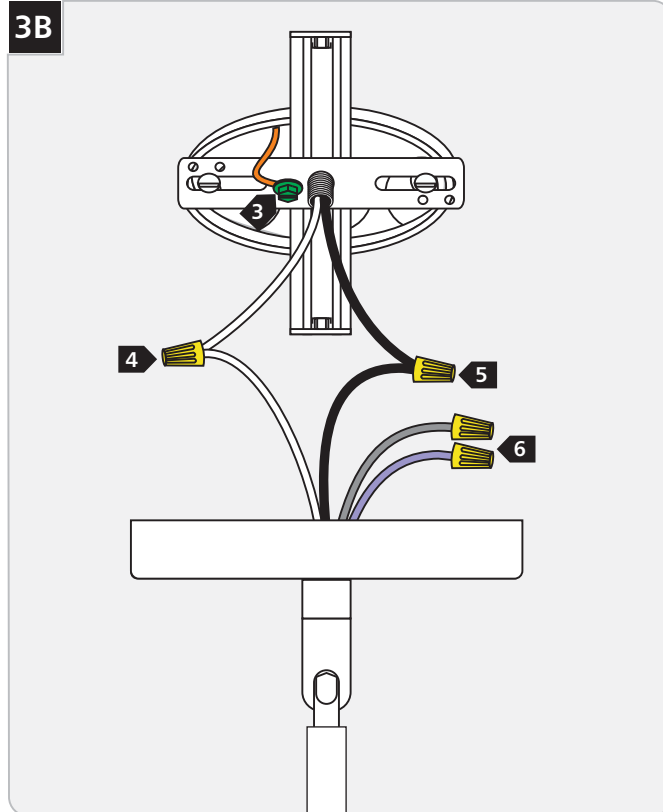
Install the Fixture

3A

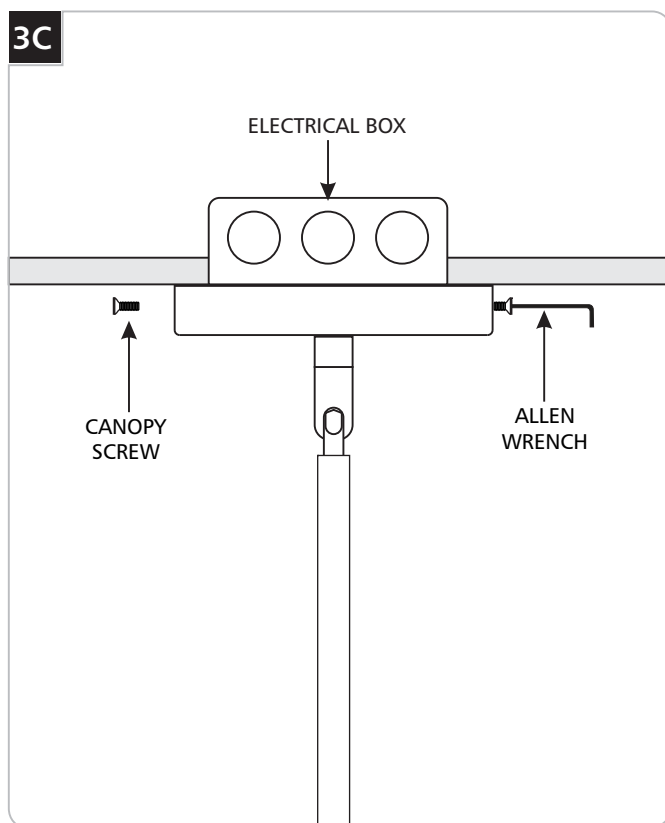


- 1 Leave 6" of the wire behind the canopy for power connections. Cut the excess wire.
- 2 Strip the end of the wires.

3B

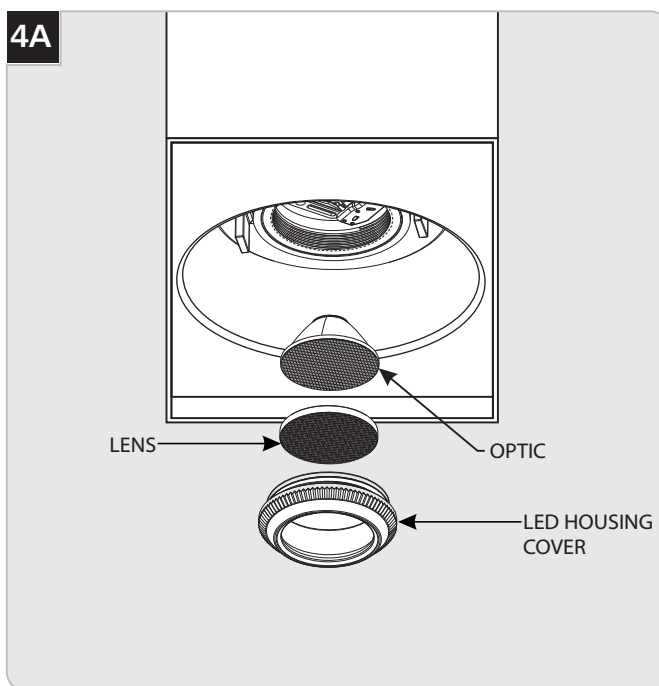


- 3 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 4 Connect the white driver wire to the neutral power line wire with a wire nut.
- 5 Connect the black driver wire to the hot power line wire with a wire nut.
- 6 For 0-10V dimming, use the purple and gray wires to connect to a compatible dimmer.

3C

- 7** Neatly place all wires and wire nut connections inside the canopy.
- 8** Align the canopy holes with the mounting plate holes. Secure the canopy in place by tightening the canopy screws using the provided Allen Wrench.

Optics and Lenses

4A

- 1** Unscrew and remove the LED housing cover.
- 2** Remove the optic.
- 3** If installing an optional lens, rest the lens inside the housing cover.
- 4** Install the optic (replacement or existing) inside the LED housing cover.
- 5** Screw the LED housing cover back on.

SAVE THESE INSTRUCTIONS!