

OUTDOOR CYLINDERS SMALL & MEDIUM ONE LIGHT WALL LANTERNS

SLO1141; SLO1161

General Product Information



Product Warranty



FCC Statement

Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

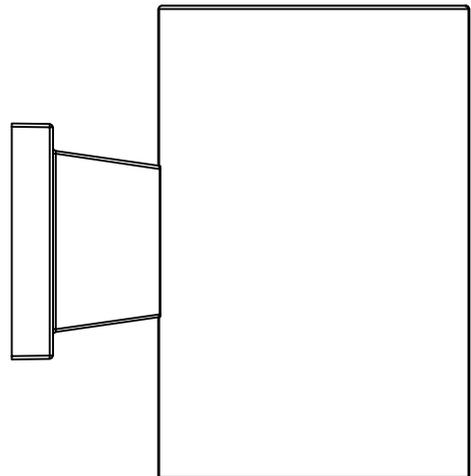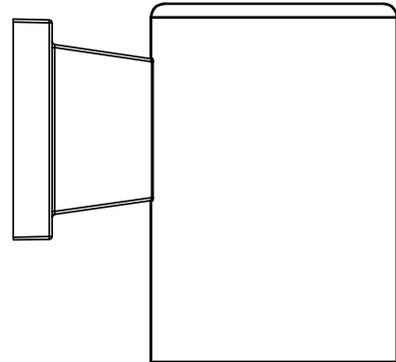

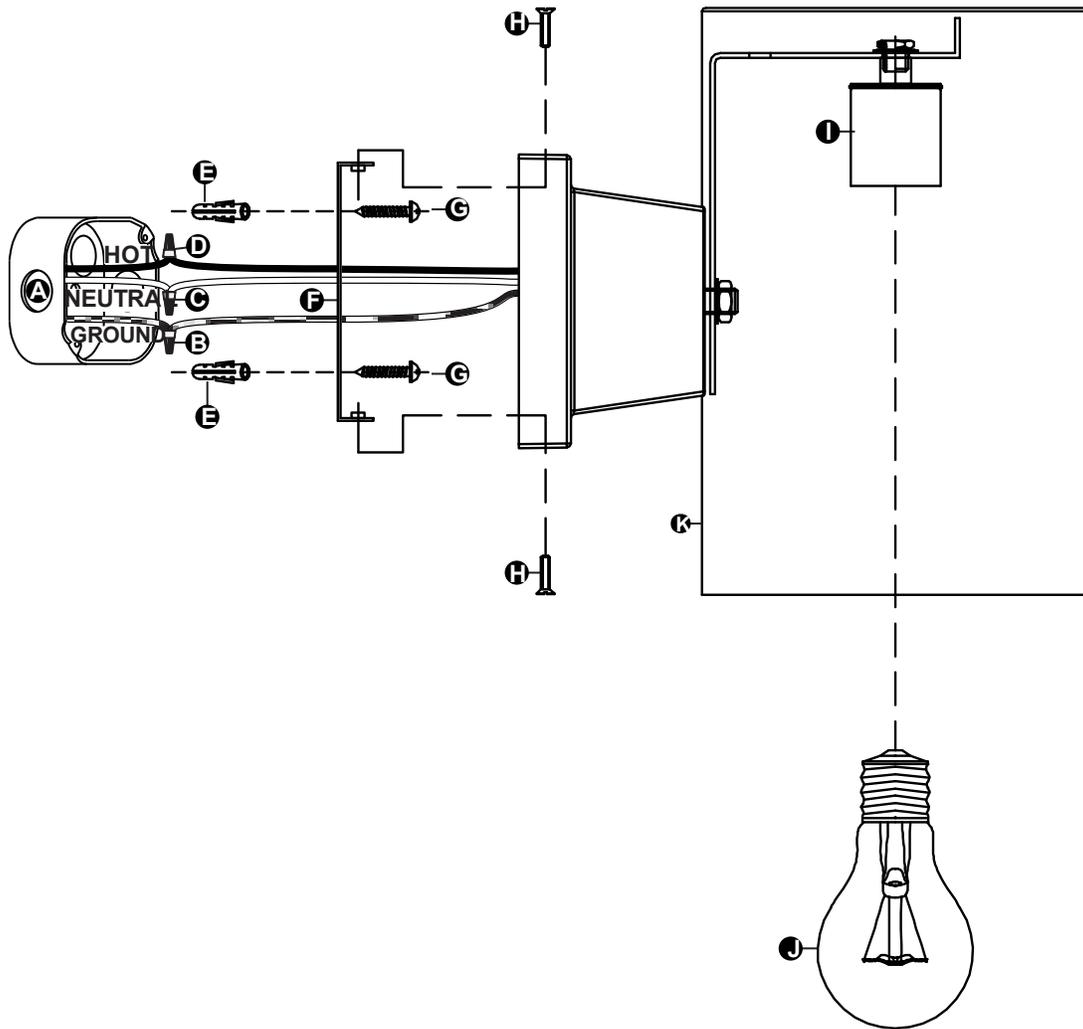

FIXTURE PARTS

A. Junction box	D. Wire nut (hot)	G. Anchor screws	J. Bulb (Not Included)
B. Wire nut (ground)	E. Anchors	H. Fixture screws	K. Shade
C. Wire nut (neutral)	F. Mounting plate	I. Socket	

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the fixture body by removing the fixture screws.
2. Mark the anchor locations through the holes on the mounting plate.
3. Remove the mounting plate.
4. Drill appropriately sized holes at the marked locations and install the anchors.
5. Secure the mounting plate to the junction box and screw the anchor screws into the anchors.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
 - b) Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all wires into the junction box.

III. Installing the Fixture

1. Mount the fixture onto the mounting plate and secure it in place using the fixture screws.
2. Screw the bulb into the socket. Refer to the socket label for max wattage information.
3. For wet locations, caulk around the base of the fixture with waterproof construction sealant.