


ASSEMBLY INSTRUCTIONS

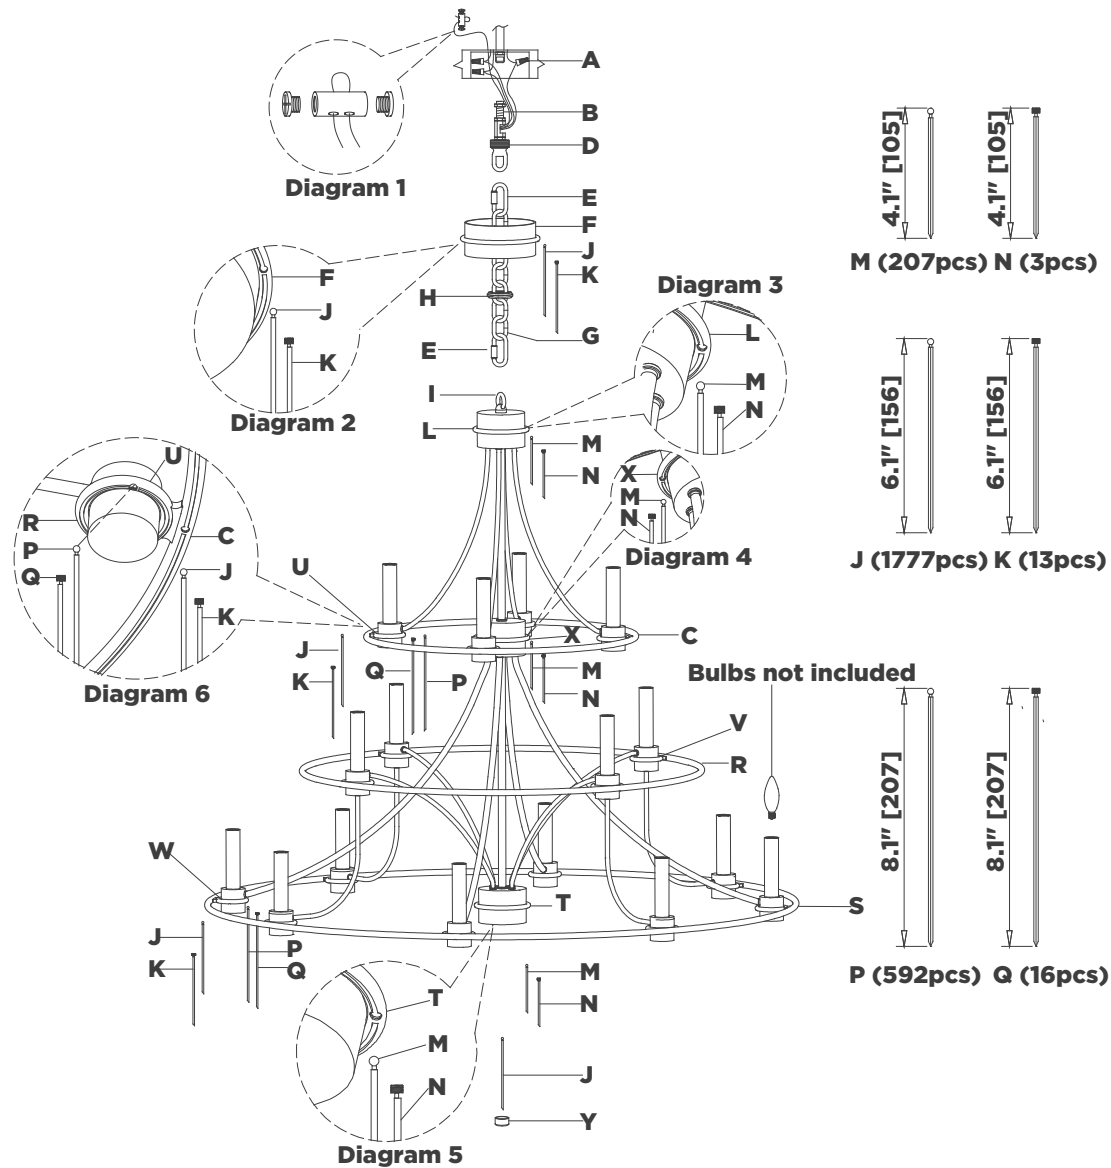

Sutton 50" Three Tier Chandelier

Item # FW5205

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Cutters
Slip Joint Pliers	Measuring Tape	Chain Pliers
Wire Strippers		

- Carefully remove all parts from the box. Place on a clean, soft surface.
- It is recommended to install a 1/4 IPS threaded pipe, secured to a structural member of the building. Then install hex nut and threaded nipple (B) into receiver and tighten with the wrench.
- Remove collar loop (D) from chain (G) and secure to threaded receiver attached to structural member by tightening locknut.
- Install canopy (F) to collar loop (D) and secure with collar ring (H).
- Determine desired overall length, and amount of chain (G) needed. Shorten chain using chain pliers. (Keep extra chain)
- Attach chain (G) to collar loop (D) and to fixture loop (I) using quick links (E). Secure quick links (E).

NOTE: Follow steps on unpacking notice to remove item body from packaging, then attach fixture loop to chain using quick link.

ASSEMBLY INSTRUCTIONS

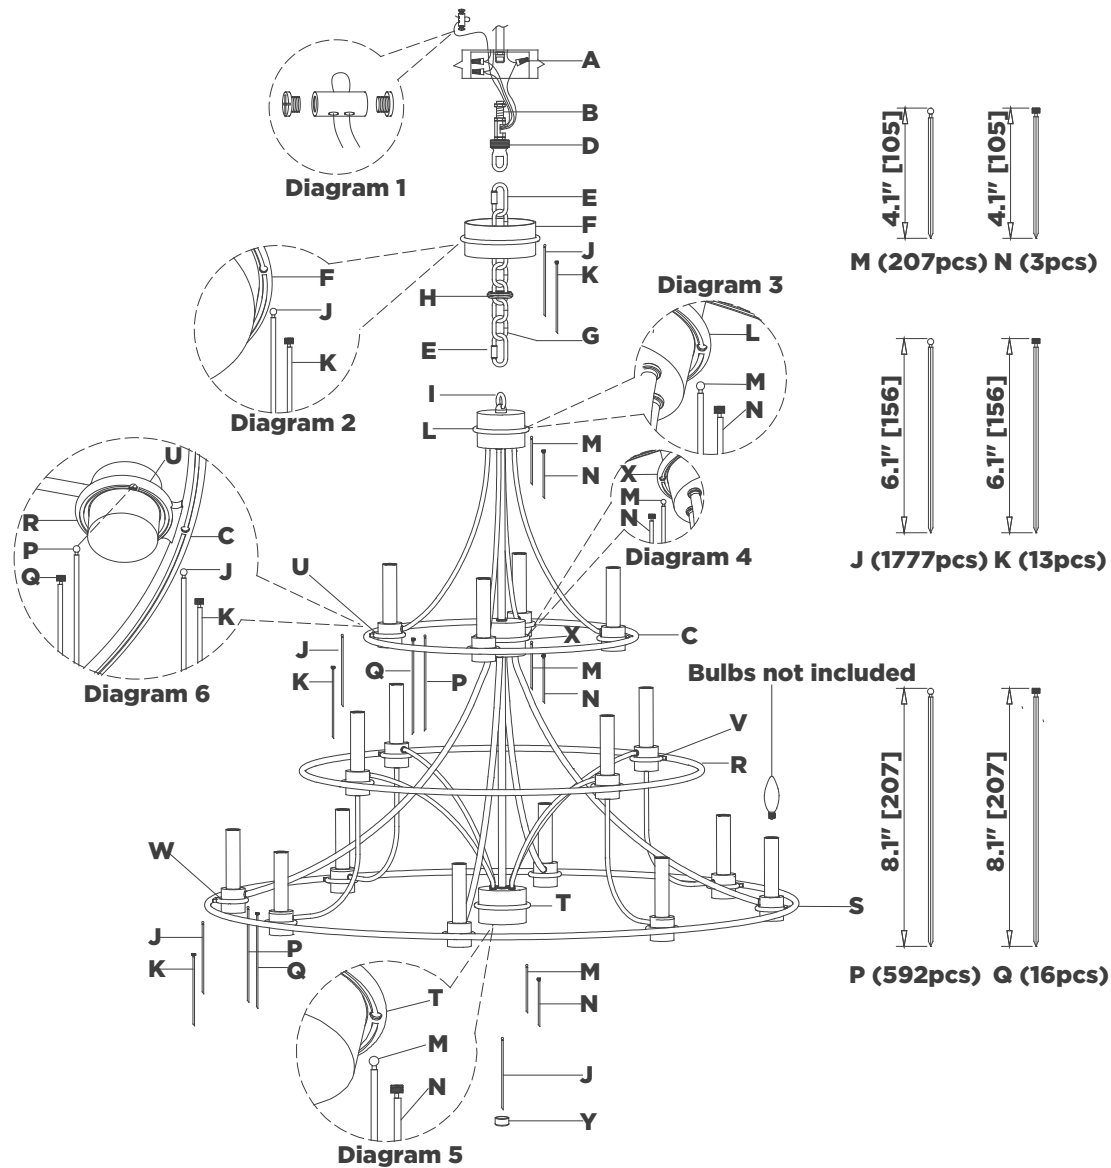

Sutton 50" Three Tier Chandelier


Item # FW5205

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- Thread fixture wire and safety cable and ground wire through chain (G).
- NOTE:** When you reach the collar loop (D), ensure there is no tension on the wires. Cut excess wires, being sure to leave enough to reach the junction box.
- Separate two sides of molded wire, and strip insulation on each 5/8".
- Loosen collar ring (H) and let canopy (F) slip down chain (G) carefully.
- Twist all fixture wires together, and slip through center hole of collar loop (D).
- NOTE:** Untwist wires and separate to prepare for connection.
- Loosen cable lock and install to end of safety cable. Run safety cable through junction box and around structural member of building. Insert cable through cable lock and tighten the ends with a screwdriver to secure (See diagram 1).
- Connect fixture ground wire (bare copper) to the supply ground wire (usually green or bare copper) using wire nut (A).
- NOTE:** It is imperative that the fixture is grounded.
- Connect fixture neutral wire (ribbed) to the supply neutral wire (usually white) using wire nut (A).
- Connect fixture hot wire (smooth with markings) to the supply hot wire (usually black) using wire nut (A).
- CAUTION:** Do not reverse the hot and neutral connections.

ASSEMBLY INSTRUCTIONS

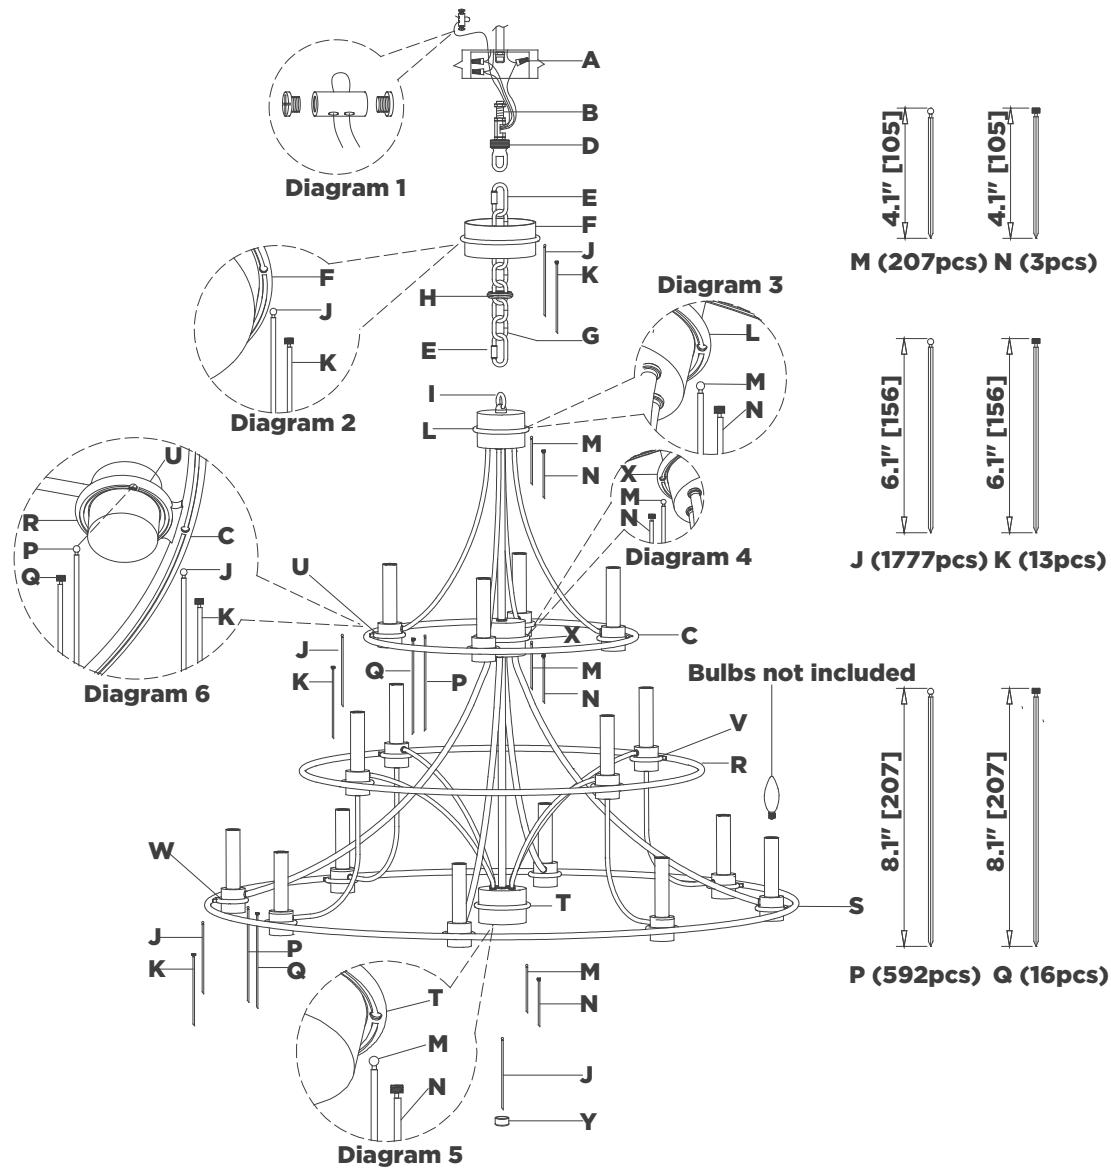

Sutton 50" Three Tier Chandelier

Item # FW5205

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- Make sure all wire connections are tight, then carefully tuck into the junction box.
- Install canopy (F) to collar loop (D) and secure with collar ring (H).
- Install light bulbs into the sockets.
- Insert metal drops (J) to opening on bottom side of canopy (F) and secure by threading metal drop (K) to opening (see diagram 2).
- Insert metal drops (M) to opening on bottom side of ring (L) and secure by threading metal drop (N) to opening (see diagram 3).
- Repeat for metal rings (X & T) (see diagram 4 & 5).
- Insert metal drops (P) to opening on bottom side of rings (U) and secure by threading metal drop (Q) to opening, then metal drops (J) to opening on bottom side of ring (C) and secure by threading metal drop (K) to opening (see diagram 6).
- Repeat for metal rings (R & S) and metal rings (V & W).
- Insert metal drop (J) through the middle hole of cap (Y), then thread cap (Y) to bottom of fixture.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

UNPACKING NOTICE

Sutton 50" Three Tier Chandelier

Item # FW5205

NOTICE:

Please follow instructions below to avoid possible damages caused by improper removal.

1. Open box and remove top layer of packaging.
2. Evenly lift fixture in areas indicated by arrows (see drawing) until clear of box. then hang fixture loop to chain using quick link.

NOTE: Remove slowly to avoid damages.

