








WYLLIS 12, 18, 24, & 30 SCONCES

KWWS696; KWWS697; KWWS698; KWWS699

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE




This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

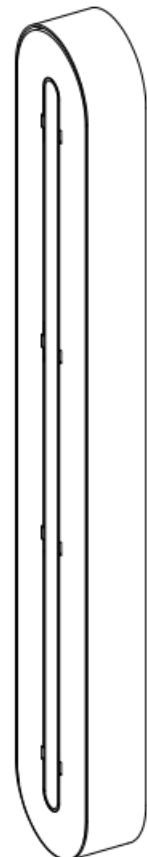

Please Note: The LED portion of this fixture is made from alabaster and should be treated with care. Regular dusting with a soft, dry cloth is recommended. Water and harsh cleaning agents can damage the material's surface. If the fixture requires more intensive cleaning, consult a professional.

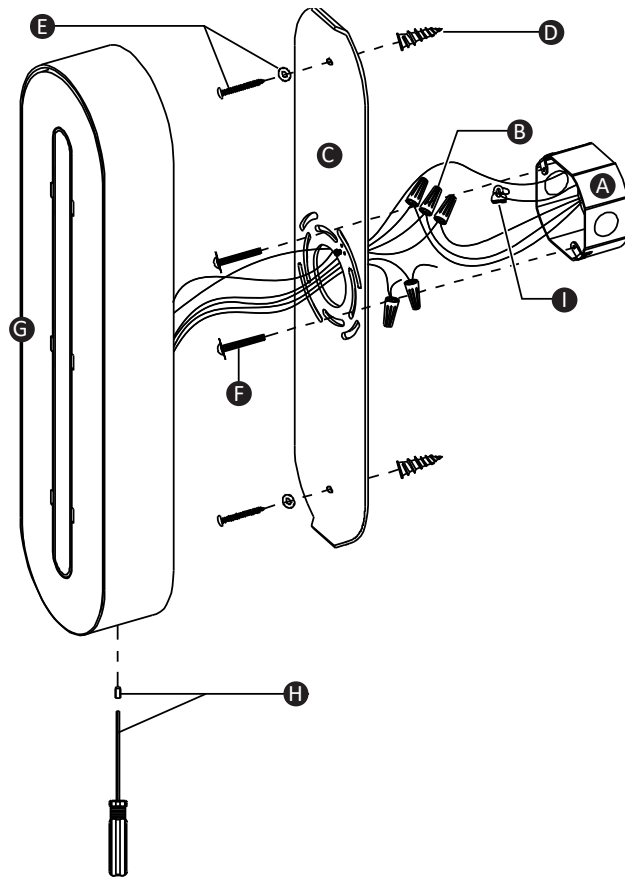

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Anchors (KWWWS697, KWWWS698, and KWWWS699 only)
- E. Anchor Screws & Flat Washers (KWWWS697, KWWWS698, and KWWWS699 only)
- F. Mounting Screws
- G. Fixture
- H. Set Screw & Allen Wrench
- I. Steel Cable

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the fixture base.
2. Secure the mounting plate to the junction box with the mounting screws.
3. **KWWWS697, KWWWS698, and KWWWS699 only:**
 - a) Mark the anchor hole locations on the mounting plate, then remove the mounting plate
 - b) Drill appropriately sized holes at the marked locations and install the anchors
 - c) Secure the mounting plate to the junction box with the mounting screws, anchor screws, and washers

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. **KWWWS697, KWWWS698, and KWWWS699 only:** Loop and secure the safety cable over a stable structure that agrees with local building codes.
3. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) White driver wires and neutral power line wire
 - b) Black driver wires and hot power line wire
4. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting bracket, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
5. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires if not in use.
6. Carefully tuck all the wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Mount the fixture base onto the mounting plate and secure it in place by installing the set screw with the Allen wrench.