

NORMAN MEDIUM & LARGE PENDANTS

GLP1081; GLP1071

General Product Information

Please visit www.visualcomfort.com for product specs.



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

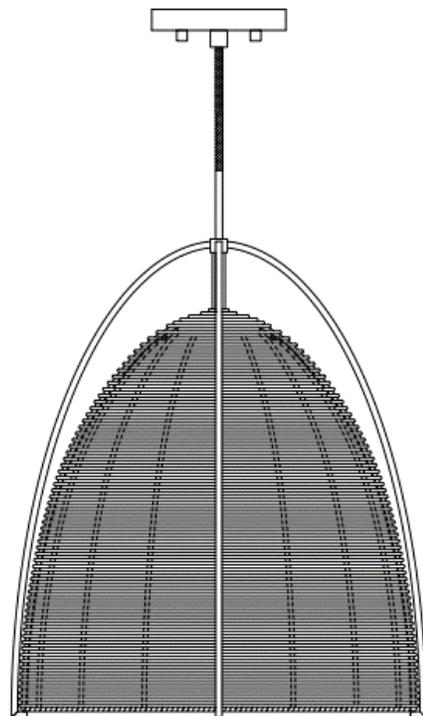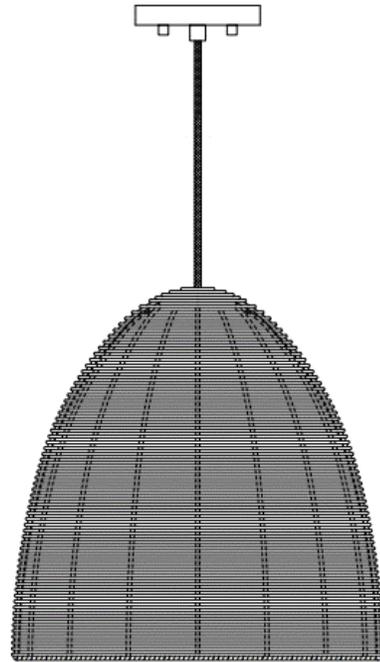

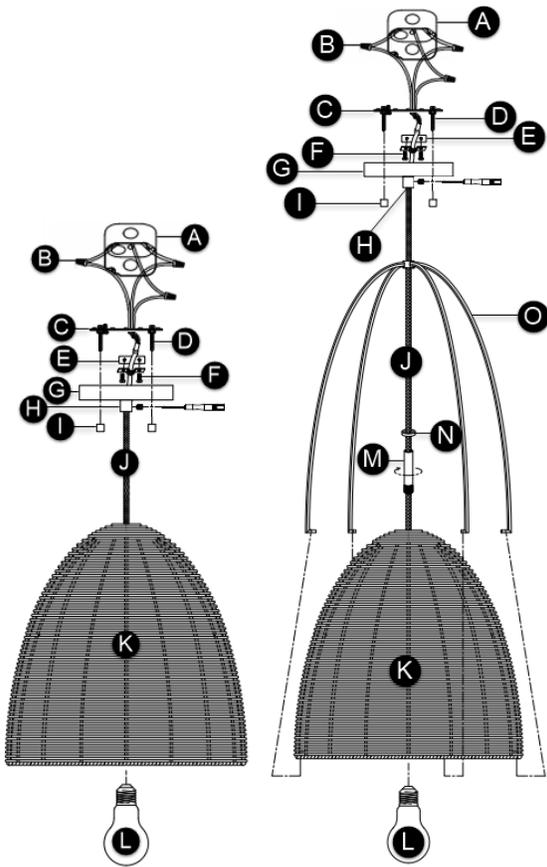

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Mounting Plate & Mounting Screws (Not Illustrated)
- D. Mounting Studs
- E. Secondary Strain Relief
- F. Strain Relief Screws
- G. Canopy
- H. Primary Strain Relief with Slotted Screw
- I. Cap Nuts
- J. Fixture Cord
- K. Fixture Shade
- L. Bulb (Not Included)
- M. Washer
- N. Short Stem
- O. Fixture Frame

INSTRUCTIONS

I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the pendant.
2. Depending on the type of installation, complete the following steps to prepare the fixture:

Option 1: With the Fixture Frame

- a. Locate the set screw on the primary strain relief of the pendant cord. Loosen (do not remove) the set screw. Once removed, it is difficult to put back into place and easily lost.
- b. Adjust the cord height by moving the cord up or down the primary strain relief/canopy. Determine, measure, and mark the cord length.
- c. Cut the cord at the marked location to suit aesthetic needs.
- d. Feed the fixture cord through secondary strain relief. Then tighten the set screw on the primary strain relief and the screws on the secondary strain relief.
- e. Secure the mounting plate to the junction box using the mounting screws.

Option 2: Without the Fixture Frame

- a. Locate the set screw on the primary strain relief and the secondary strain relief and loosen (do not remove) the set screw and strain relief screws.
- b. Remove the secondary strain relief, canopy and then the fixture frame, washer, and the short stem from the fixture cord / the fixture shade assembly.
- c. Feed the cord back through the primary strain relief/canopy.
- d. Adjust the cord height by moving the cord up or down the primary strain relief. Determine, measure, and mark the cord length.
- e. Cut the cord at the marked location to suit aesthetic needs.
- f. Feed the fixture cord through the secondary strain relief. Then tighten the set screw on the primary strain relief and the screws on the secondary strain relief.
- g. Secure the mounting plate to the junction box using the mounting screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black) to hot power line wire
 - b) Neutral fixture wire (white) to neutral power line wire
4. Carefully tuck all the wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Lift the assembled fixture's canopy up against the mounting plate, align the canopy screw holes with the mounting studs. Secure it in place by screwing the cap nuts tightly onto them.
2. Screw the bulb into the socket. Refer to the socket label for max wattage information.