




WARREN DARK SKY MEDIUM PENDANT

SLO1271

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

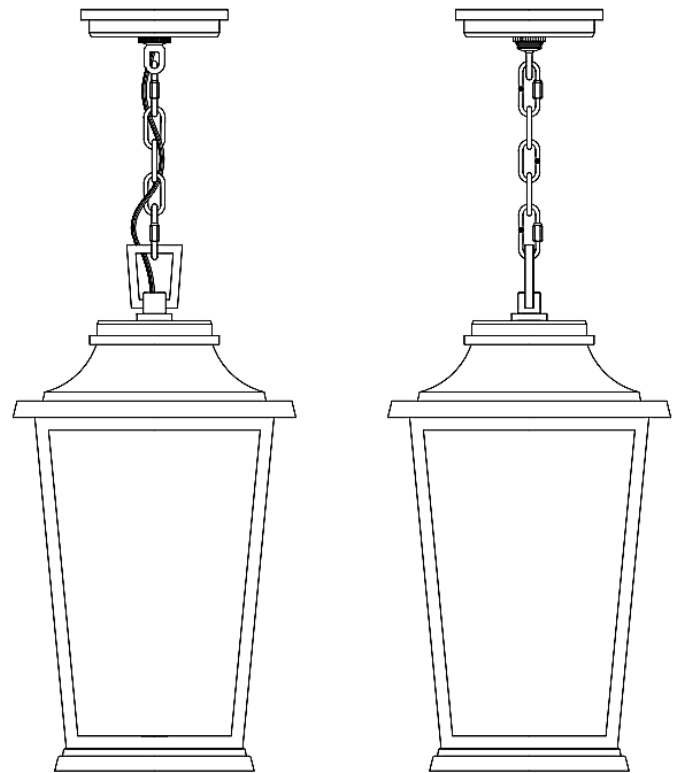

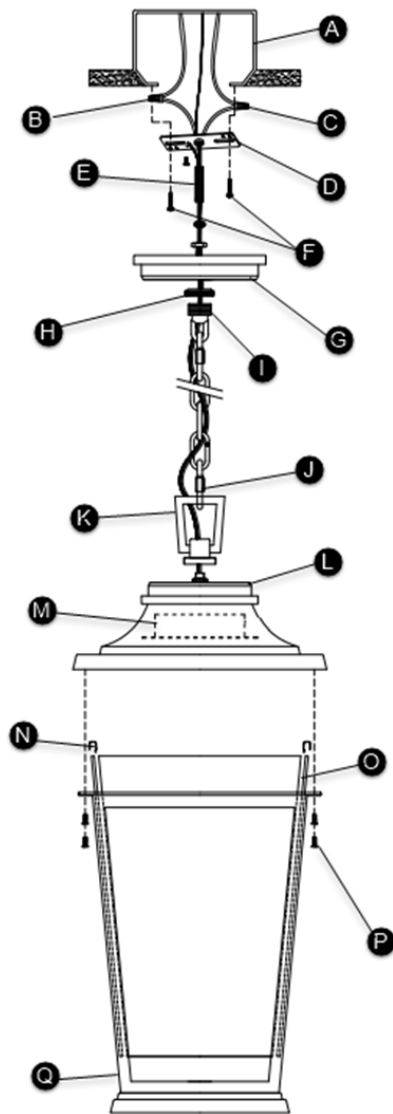

FIXTURE PARTS

- A. Junction Box
- B. Fixture Wires
- C. Fixture Wires
- D. Mounting Plate
- E. Threaded Nipple
- F. Mounting Screws
- G. Canopy
- H. Collar Nut
- I. Screw Collar
- J. Quick Link
- K. Fixture Loop
- L. Fixture
- M. Driver
- N. Clip
- O. Glass Panel
- P. Housing Screw
- Q. Housing

INSTRUCTIONS

I. Preparing the Fixture

1. Secure the mounting plate to the junction box.
2. Temporarily unscrew and remove the collar nut, then screw the screw collar tightly onto the threaded nipple.
3. Install a quick link onto the end of the chain and fixture loop. Determine the wanted height of the fixture and remove a portion of the chain by opening a link and removing it from the top.
4. Install the collar nut and canopy onto the chain (in that order), then install the other quick link onto the free end of the chain and screw collar.
5. Weave the cord through the chain, screw collar, canopy, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.

II. Wiring the Fixture

6. Connect the fixture to a suitable ground in accordance with local electrical codes.
7. Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
8. Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.

III. Installing the Fixture

9. Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
10. Install all glass panels by carefully sliding them into the housing and securing them using the clips.
11. Install the housing to the fixture and secure them together by screwing on the housing screws.