

BARN LIGHT SMALL, MEDIUM, LARGE, & X-LARGE ONE LIGHT OUTDOOR WALL LANTERNS

8537401; 8637401; 8737401; 8837401

General Product Information

 Intertek	 SAVE THESE INSTRUCTIONS!	 STANDARD INSTALLATION	 OUTDOOR
 WET LOCATION SAFE	 NEC COMPLIANT JUNCTION BOX	 BULB(S) (NOT INCLUDED)	 CONVERTS TO LED
 DARK SKY FRIENDLY	 PLEASE SEE visualcomfort.com FOR PRODUCT SPECS	 CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!	 BEST PRACTICE: HANDLE FIXTURE WITH GLOVES



Product Warranty



FCC Statement

Tools Required

 PHILLIPS-HEAD SCREWDRIVER	 CAULK GUN	 ELECTRIC DRILL	 ALLEN WRENCH
--	--	---	---

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

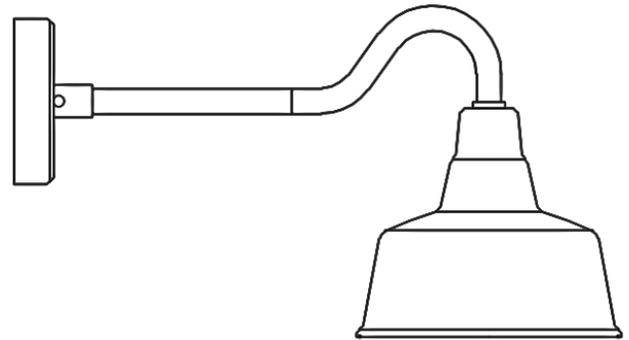

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate & Mounting Studs
(Not Illustrated)
- D. Mounting Screws
- E. Fixture Base
- F. Set Screws
- G. Cap Nuts
- H. Arm Extension
- I. Fixture
- J. Bulb (Not Included)

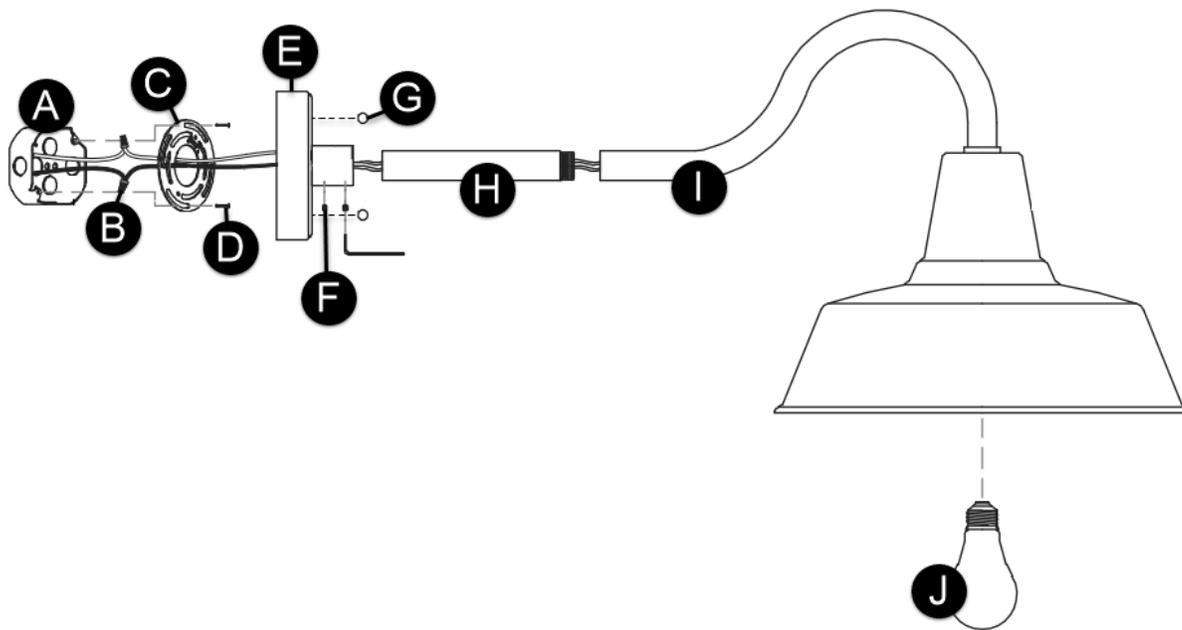

INSTRUCTIONS

I. Preparing the Fixture

1. Secure the mounting plate to the junction box.
2. **Optional:** Feed the fixture wires through the arm extension and screw the threaded end of the fixture arm into the fixture.
3. Feed the fixture wires into the fixture base.
4. Insert the fixture arm into the fixture base and secure it in place with the set screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a. Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
 - b. Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Mount the fixture base onto the mounting plate studs and secure it with the two cap nuts in vertical orientation (and set screws facing down).
2. Screw the bulb into the socket. Refer to the socket label for max wattage information.
3. For wet locations, caulk around the base of the fixture with waterproof construction sealant.