


INSTALLATION AND SAFETY INSTRUCTIONS

1. Carefully slip glass against ring on bottom of fixture body so that threaded studs slip through hole in glass.
2. Hold bottom ring in place against glass so that threaded studs protrude through holes in ring and secure in place with finials. (Do not over-tighten.)
3. Determine the height from ceiling you would like your fixture to hang. Fixture is provided with (3) 12" long tubes that can be used or omitted to achieve desired height.
4. Assemble tube to fixture.
5. Install canopy mounting screws, finger tight.
6. Slip canopy then mounting strap over stem(s) assembled to fixture.
7. Thread ball swivel to threaded pipe, until snug against stem. Secure ball swivel in place by threading a hexnut onto threaded pipe inside ball.
8. Lift mounting strap up against ball swivel, aligning slot in ball with lap in strap. Snap ball retainer into place. Placing one side of ball retainer in place and then snapping the other in is suggested.
- 9 Attach assembled fixture/mounting strap to outlet box. Assemble mounting strap to ceiling with ball slot and tap towards lower portion of slope in ceiling.
10. Attach ground wire from outlet box between cupped washer and green ground screw and thread ground screw into mounting strap. If fixture is provided with ground wire, connect fixture ground wire to outlet box ground wire with wire connectors (not provide). Never connect ground wire to black or white power supply wire.
11. Make wire connections (connectors not provided.) Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: when parallel wire (SPT I & SPT II) is used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth.

12. Push fixture to ceiling, carefully passing mounting screws through holes in canopy.
13. Secure fixture to ceiling with Ball knob.

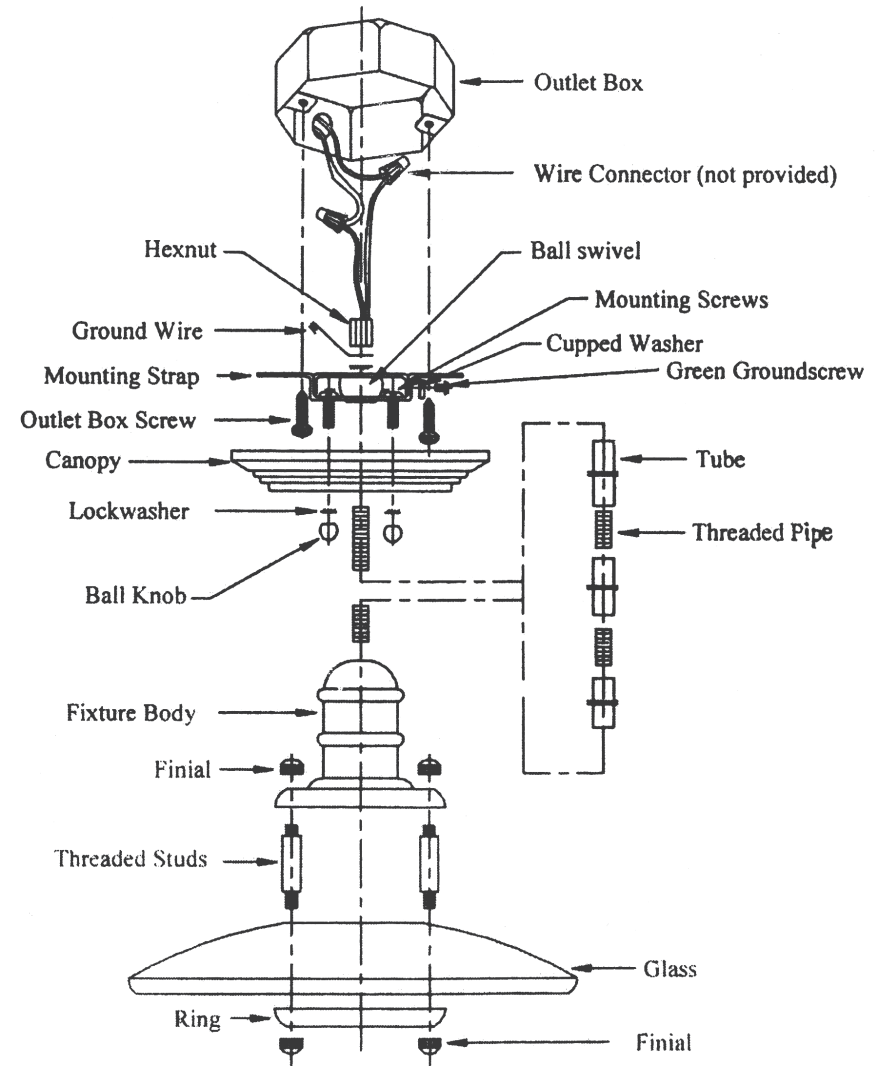

VO-161