

3.5" OCULUX - 0-35° Adjustable

R3BRA, R3BSA

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Designed to fit in tight plenum space

FEATURES

- Energy Star® Rated
- Title 24 Compliant
- IC-rated Remodel and New Construction
- Airtight in New Construction and remodel
- Shallow housing under 4" depth
- Cutout 4 3/4"
- Single spot light source

SPECIFICATIONS

- Construction:** Die-cast aluminum trim and heat sink
- Dimming:** ELV or TRIAC or 0-10V dimming compatible
- Input:** 120V for R3BNICA-10, R3BBRT-10; 120-277V for R3BNICA-10U
- Power:** 11W
- Mounting:** Retention clips firmly hold trim to housing.
- Finish:** Powder coated
- Ceiling thickness:** 1/2" - 1"
- Standards:** ETL&cETL listed, Damp location listed
- Operating Temperature:** -4°F to 104°F (20°C to 40°C)

Trims (Order Housing Separately)	Model	Beam	Color Temp	Max Lumens	Max CBCP	Finish
<p>R3BRA Round 0 - 35° Adjustable 48° visual cutoff</p>		S 15°	927 2700K	900	4384	BN Brushed Nickel WT White
			930 3000K	970	4712	
		N 25°	927 2700K	915	2513	
			930 3000K	985	2701	
		F 50°	927 2700K	900	1196	
			930 3000K	970	1285	
<p>R3BSA Square 0 - 35° Adjustable 48° visual cutoff</p>		S 15°	927 2700K	900	4384	BN Brushed Nickel WT White
			930 3000K	970	4712	
		N 25°	927 2700K	915	2513	
			930 3000K	985	2701	
		F 50°	927 2700K	900	1196	
			930 3000K	970	1285	

R3BRA- _____ - _____ - _____

Example: R3BRA-S930-WT

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

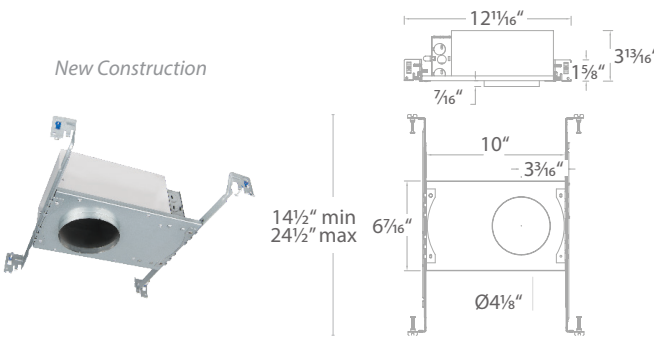
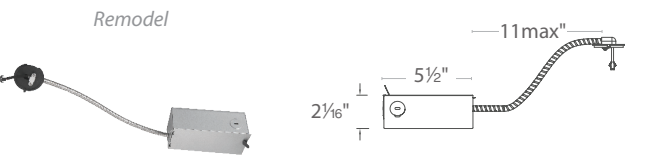
3.5" OCULUX - 0-35° Adjustable

R3BRA, R3BSA

WAC LIGHTING

Responsible Lighting®

Housings (Required) - Order separately from trims

	Model	Input	Dimming	Notes
<p><i>New Construction</i></p>  <p>12¹/₁₆"</p> <p>3¹³/₁₆"</p> <p>7¹/₁₆"</p> <p>1¹/₈"</p> <p>10"</p> <p>3³/₁₆"</p> <p>6⁷/₁₆"</p> <p>Ø4¹/₈"</p> <p>14¹/₂" min 24¹/₂" max</p>	R3BNICA-10 IC-Rated, Airtight	120V	100% - 5% TRIAC, ELV, 0-10V	Less than 4" plenum depth Allows adjustment in any direction when used with adjustable trims
	R3BNICA-10U IC-Rated, Airtight	120V - 277V	120V 100% - 5% TRIAC, ELV, 0-10V	277V 100% - 1% 0-10V
<p><i>Remodel</i></p>  <p>11max"</p> <p>5¹/₂"</p> <p>2¹/₁₆"</p>	R3BBRT-10 IC Rated	120V	100% - 5% TRIAC, ELV, 0-10V	Allows adjustment in any direction when used with adjustable trims Ceiling thickness: ½" - 1"

Example: **R3BNICA-10**

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760