

INSTALLATION INSTRUCTION

LED Beauty Spot Canopy

DR-LED302

WAC LIGHTING
Responsible Lighting®

SAFETY INSTRUCTION

IMPORTANT: NEVER attempt any work without shutting off the electricity.

- Read all instructions before installing.
- Installed by a qualified electrician
- Fixture is intended for installation in accordance with National Electric Code, and local regulations. Consult with local inspector to assure compliance.
- To reduce the risk of fire, electrical shock and injuries to persons, turn off power at main switch before installing or modifying the system.
- Retain instructions for future maintenance reference.

OVERVIEW

Intended ceiling, cabinets and display. Fixtures use a LED, 100mA maximum (used with 24 volt power supply). Fixture is held in place by spring tension against the cut out hole.


INSTALLING FIXTURE:

1. Run a wire from a remote transformer to the fixture site (use 24 volt listed transformer, not supplied).
2. Cut a 2 3/8" diameter opening on the mounting surface.
3. Bring the wire through the hole.
4. Loosen the two screws on either side of can to remove and access the socket wires.
5. Remove the knock out in the can and install the appropriate wire clamp.
6. Connect "output" wires from the transformer to the socket wires with wire nuts provided.
7. Tuck wires under the can and re install with the two screws removed earlier.
8. Compress the leaf springs on either side of the housing and insert into the cut out hole.

INSTALLING SHADE:

1. Shades will fit over the lamp and are held in space by a spring band at the base of the socket, simply push on or pull off.
2. Shades sold separately. Use shades from the "DR" series.

Retain instructions for future reference.

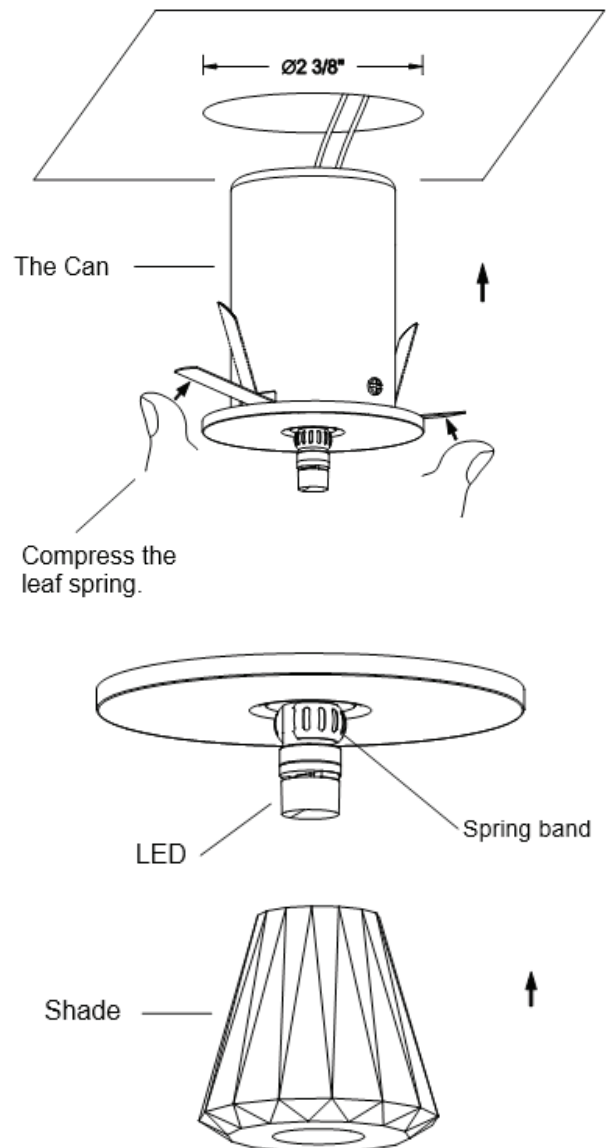

Shade shown is the DR-G361-CL

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Ave • Ontario, CA 91761
Phone (800) 526.2588 • Fax (800) 526.2585