
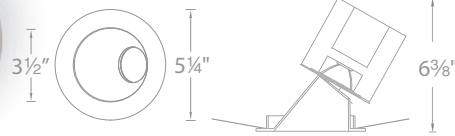


HR3LEDT418P

3.5" Tesla™ Pro LED 30°-45° Adjustable Trim

WAC LIGHTING

Responsible Lighting®

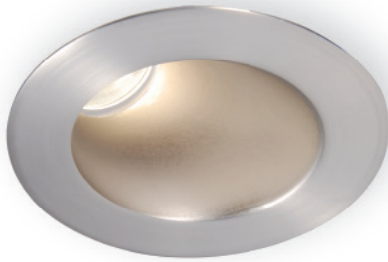

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Minimum profile, round 30° to 45° adjustable trim with interior open reflector.

FEATURES

- 3.5" aperture
- Energy Star® rated (see below for list of models)
- Damp location listed
- 30° visual cutoff angle for glare control
- Adjustable fixtures are ideal for sloped ceiling applications
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Durable die-cast aluminum construction with borosilicate glass lens. Extruded aluminum heat sink.

Power Consumption: 21.5W

Dimming: 0-10V Dimming: 100%-10%
ELV Dimming: 100%-15% (120V only)

Mounting: Two heavy gauge retention clips hold trim firmly to housing.

Finish: Powder coated white
Electroplated brushed nickel and copper bronze

Standards: ETL & cETL Listed. See table below for Energy Star® qualifying products.

TRIMS

Model#	Beam	Color Temp	CRI	Lumens	CBCP	Energy Star®	Finish
HR3LEDT418P 30° to 45° Adjustable	N 26°	827 2700K	85	1010	2803	Yes	BN Brushed Nickel CB Copper Bronze WT White
		927 2700K	90	860	2407	No	
		830 3000K	85	1050	2860	Yes	
		930 3000K	90	960	2687	Yes	
		835 3500K	85	1145	3159	Yes	
		840 4000K	85	1165	3167	Yes	
	F 38°	827 2700K	85	975	1982	Yes	
		927 2700K	90	830	1688	No	
		830 3000K	85	1015	2056	Yes	
		930 3000K	90	925	1881	Yes	
		835 3500K	85	1105	2210	Yes	
		840 4000K	85	1120	2272	Yes	

HR3LEDT418P

Example: **HR3LEDT418PF835CB**

COMPATIBLE HOUSINGS

 See individual housing spec sheets for complete information.

New Construction

HR-3LED-H18D1-ICA Narrow, IC-Rated, Airtight	120V -277V	HR-3LED-H18D1-ICAC Narrow, IC-Rated, Airtight Chicago Plenum	120V -277V
HR-3LED-H18D-ICA IC-Rated, Airtight	120V -277V	HR-3LED-H18D-ICAC IC-Rated, Airtight Chicago Plenum	120V -277V
HR-3LED-H18D-EMICA IC-Rated, Airtight Emergency Backup Battery	120V	HR3LED-H18D-EMICAF IC-Rated, Airtight Emergency Backup Battery	277V

Remodel

HR-3LED-R22D Non-IC	120V -277V
-------------------------------	------------

REPLACEMENT MODULES

Reflectors

Narrow Flood	SL-REF-BL10-1-N
Flood	SL-REF-BL10-1-F

LED

2700K	85 CRI	BXRC-27E1000-B-03
2700K	90 CRI	BXRC-27G1000-B-03
3000K	85 CRI	BXRC-30E1000-B-03
3000K	90 CRI	BXRC-30G1000-B-03
3500K	85 CRI	BXRC-35E1000-B-03
4000K	85 CRI	BXRC-40E1000-B-03

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760