
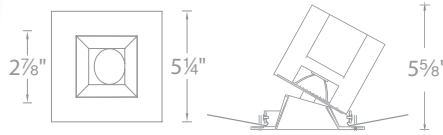


# HR3LEDT518P

3.5" Tesla™ Pro LED Square 0-30° Adjustable

# WAC LIGHTING

Responsible Lighting®

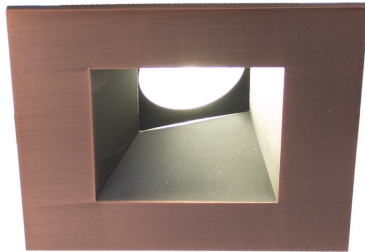

Fixture Type:

Catalog Number:

Project:

Location:

## PRODUCT DESCRIPTION

Minimum profile, square 0° to 30° adjustable trim with interior open reflector.

## FEATURES

- 3.5" aperture
- Energy Star® rated
- Damp location listed
- 30° visual cutoff angle for glare control
- Adjustable fixtures are ideal for sloped ceiling applications
- 5 year WAC Lighting product warranty

## SPECIFICATIONS

**Construction:** Durable die-cast aluminum construction with borosilicate glass lens. Extruded aluminum heat sink.

**Power Consumption:** 21.5W


**Dimming:** 0-10V Dimming: 100%-10%  
ELV Dimming: 100%-15% (120V only)

**Mounting:** Two heavy gauge retention clips hold trim firmly to housing.

**Finish:** Powder coated white  
Electroplated brushed nickel and copper bronze

**Standards:** ETL & cETL Listed. See table below for Energy Star® qualifying products.

## TRIMS

Model#	Beam	Color Temp	CRI	Lumens	CBCP	Energy Star®	Finish
HR3LEDT518P <i>0° to 30° Adjustable</i>	N 30°	827 2700K	85	1135	2469	Yes	<b>BN</b> Brushed Nickel <b>CB</b> Copper Bronze <b>WT</b> White 
		927 2700K	90	950	2092	Yes	
		830 3000K	85	1165	2540	Yes	
		930 3000K	90	1065	2381	Yes	
		835 3500K	85	1270	2791	Yes	
		840 4000K	85	1295	2792	Yes	
	F 52°	827 2700K	85	1100	1358	Yes	
		927 2700K	90	990	1258	Yes	
		830 3000K	85	1140	1435	Yes	
		930 3000K	90	1030	1303	Yes	
		835 3500K	85	1230	1550	Yes	
		840 4000K	85	1265	1580	Yes	

**HR3LEDT518P**

Example: HR3LEDT518PF835BN

## COMPATIBLE HOUSINGS *See individual housing spec sheets for complete information.*

New Construction

<b>HR-3LED-H18D1-ICA</b> <i>Narrow, IC-Rated, Airtight</i>	120V-277V	<b>HR-3LED-H18D1-ICAC</b> <i>Narrow, IC-Rated, Airtight Chicago Plenum</i>	120V-277V
<b>HR-3LED-H18D-ICA</b> <i>IC-Rated, Airtight</i>	120V-277V	<b>HR-3LED-H18D-ICAC</b> <i>IC-Rated, Airtight Chicago Plenum</i>	120V-277V
<b>HR-3LED-H18D-EMICA</b> <i>IC-Rated, Airtight Emergency Backup Battery</i>	120V	<b>HR3LED-H18D-EMICAF</b> <i>IC-Rated, Airtight Emergency Backup Battery</i>	277V
<b>HR-3LED-H18D-A</b> <i>New Construction Non-IC, Airtight</i>	120V-277V	<b>HR-3LED-R22D</b> <i>Adjustable Remodel Non-IC Rated, Airtight</i>	120V-277V

## REPLACEMENT MODULES

Reflectors

<i>Narrow Flood Flood</i>	<b>SL-REF-BL10-1-N</b> <b>SL-REF-BL10-1-F</b>
---------------------------	--

LED

2700K	85 CRI	<b>BXRC-27E1000-B-03</b>
2700K	90 CRI	<b>BXRC-27G1000-B-03</b>
3000K	85 CRI	<b>BXRC-30E1000-B-03</b>
3000K	90 CRI	<b>BXRC-30G1000-B-03</b>
3500K	85 CRI	<b>BXRC-35E1000-B-03</b>
4000K	85 CRI	<b>BXRC-40E1000-B-03</b>

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760