


3.5" OCULUX ARCHITECTURAL Wall Wash - R3CSWT, R3CSWL

WAC LIGHTING
Responsible Lighting®

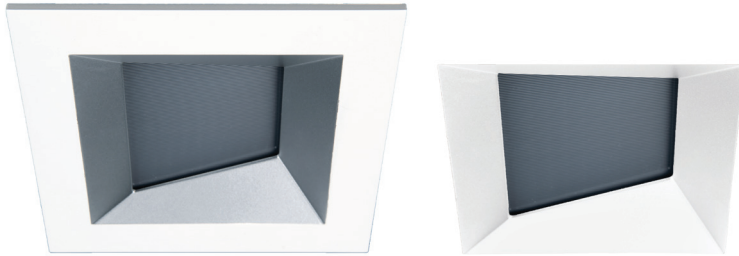

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Oculux Architectural offers performance features in a simple but versatile package for residential and commercial applications alike. One housing can be used for downlight, adjustable, pinhole, wall wash trims.

FEATURES

- 3 beam angle options included: For Wall Wash trim optimal optics is light engine with no film installed.
- IC-Rated, Airtight, New Construction
- Adjustable LED light engine included with housing
- Shallow housing under 4" depth
- 5 year warranty

SPECIFICATIONS

Construction: Die-cast aluminum trim and heat sink

Dimming: 100% - 1% TRIAC, ELV
100% - 5%, 0-10V

Input Power: 13.5W, 120V-277V 50/60Hz

Light Source: High output COB LED rated life of 50,000 hours.

Mounting: Retention clips firmly hold trim to housing. Cutout 4¼" x 4¼"

Finish: Powder coated white, enamel-coated haze.

Ceiling thickness: ½" - 1"

Standards: UL & cUL, Wet location listed. Title 24 JA8-2016 Compliant

Operating Temperature: -4°F to 104°F (-20°C to 40°C)

Trims (Order Housing Separately)

	Model	Beam	Color Temp	Lumens	BCBP	Finish
	R3CSWT Square Trim Wall Wash	Asymmetrical	927 2700K 930 3000K 935 3500K 940 4000K	615 660 675 705	N/A	HZWT Haze/White WT White
	R3CSWL Square Trimless Wall Wash	Asymmetrical	927 2700K 930 3000K 935 3500K 940 4000K	615 660 675 705	N/A	HZ Haze WT White

R3CSW__ - _____

Example: R3CSWT-HZWT

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91760

3.5" OCULUX ARCHITECTURAL


Wall Wash - R3CSWT, R3CSWL

WAC LIGHTING

Responsible Lighting®

Housings (Required) - Order separately from trims

Model Color Temp Input

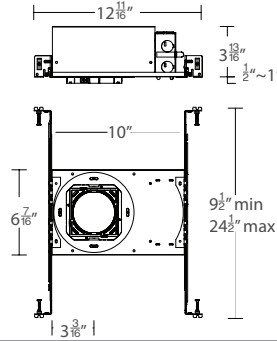

Model	Color Temp	Input
R3CSN-11	927 2700K	120V - 277V
IC-Rated, Airtight	930 3000K	
New Construction	935 3500K	
	940 4000K	

Example: R3CSN-11-927

GLARE CONTROL ACCESSORIES sold separately

LENS-16	HCL	Honeycomb Louver
----------------	------------	------------------

FEATURES

- Adjustable LED light engine included with housing:
Optimal Vertical Adjustment for Wall Wash is 15° indexed position
- Trim or trimless with die-cast spackle frame included.
- Accepts one optional honeycomb louver or optical lens.

LENS ACCESSORIES sold separately

LENS-16	AMB	Amber
	RED	Red
	FR	Frosted
	SPR	Spread
	BEL	Beam Elongating

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760