


3.5" OCULUX ARCHITECTURAL

Adjustable Downlight - R3CSDT, R3CSDL

WAC LIGHTING

Responsible Lighting®

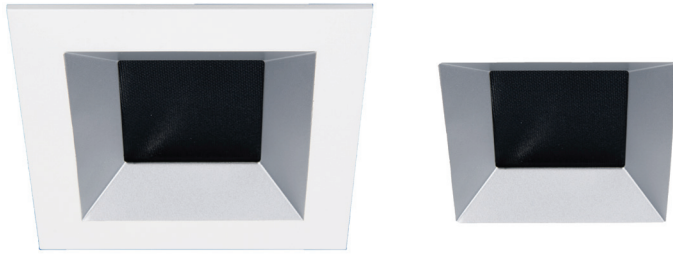

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Oculux Architectural offers performance features in a simple but versatile package for residential and commercial applications alike. One housing can be used for downlight, adjustable, pinhole, wall wash trims.

FEATURES

- 3 beam angle options included:
Narrow flood beam film pre-installed, interchangeable flood beam film supplied, remove film for spot beam.
- IC-Rated, Airtight, New Construction
- Adjustable LED light engine included with housing:
Vertical Adjustment 0-30°, Horizontal Adjustment 365°
- Shallow housing under 4" depth
- 5 year warranty

SPECIFICATIONS

- Construction:** Die-cast aluminum trim and heat sink
- Dimming:** 100% - 1% TRIAC, ELV
100% - 5%, 0-10V
- Input Power:** 13.5W, 120V-277V 50/60Hz
- Light Source:** High output COB LED rated life of 50,000 hours.
- Mounting:** Retention clips firmly hold trim to housing. Cutout 4¼" x 4¼"
- Finish:** Powder coated white, enamel-coated haze.
- Ceiling thickness:** ½" - 1"
- Standards:** UL & cUL, Wet location listed. Energy Star® 2.0
Title 24 JA8-2016 Compliant
- Operating Temperature:** -4°F to 104°F (-20°C to 40°C)

Trims (Order Housing Separately)

Trims (Order Housing Separately)	Model	Beam	Color Temp	Lumens	CBCP	Finish
<p>R3CSDT Square Trim Downlight & Adjustable</p>	Spot 16°	927 2700K	865 5030	HZWT Haze/White WT White		
		930 3000K	930 5408			
		935 3500K	950 5517			
	Narrow Flood 36°	940 4000K	1000 5799			
		927 2700K	860 1452			
		930 3000K	925 1561			
	Flood 51°	935 3500K	940 1592			
		940 4000K	990 1671			
		927 2700K	795 829			
<p>R3CSDL Square Trimless Downlight & Adjustable</p>	Spot 16°	930 3000K	855 891	HZ Haze WT White		
		935 3500K	875 909			
		940 4000K	915 953			
	Narrow Flood 36°	927 2700K	860 1452			
		930 3000K	925 1561			
		935 3500K	940 1592			
	Flood 51°	940 4000K	990 1671			
		927 2700K	795 829			
		930 3000K	855 891			
		935 3500K	875 909			
		940 4000K	915 953			

R3CSD ____ - ____

Example: R3CSDT-HZWT

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center


1750 Archibald Avenue

Ontario, CA 91760

3.5" OCULUX ARCHITECTURAL Adjustable Downlight - R3CSDT, R3CSDL

WAC LIGHTING
Responsible Lighting®

Housings (Required) - Order separately from trims

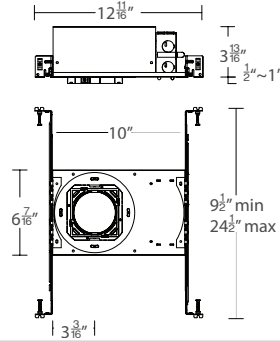

Model Color Temp Input

Model	Color Temp	Input
R3CSN-11 <i>IC-Rated, Airtight New Construction</i>	927	2700K
	930	3000K
	935	3500K
	940	4000K
		120V - 277V

Example: **R3CSN-11-927**

FEATURES

- Adjustable LED light engine included with housing:
Vertical Adjustment 0-30°, Horizontal Adjustment 365°
- Trim or trimless with die-cast spackle frame included.
- Accepts one optional honeycomb louver or optical lens.

GLARE CONTROL ACCESSORIES sold separately

LENS-16	HCL	Honeycomb Louver
----------------	------------	------------------

LENS ACCESSORIES sold separately

LENS-16	AMB	Amber
	RED	Red
	FR	Frosted
	SPR	Spread
	BEL	Beam Elongating

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760