

FIN - model: WP-LED1

Endurance Wallpack

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: _____

Location: _____

SPECIFICATIONS

Construction: Die-cast aluminum

Power: Integral driver in luminaire. Universal voltage input (120V-277V)

Dimming: 100% - 30% with 0 - 10V dimmer (120V - 277V)

100% - 15% with Electronic Low Voltage (ELV) dimmer (120V only)

Finish: Powder coated Bronze, Graphite, and White

Standards: Energy Star®, DLC Listed, IP66, Wet Location, ETL & cETL Listed


PRODUCT DESCRIPTION

Die cast aluminum factory sealed housings with patent pending design for a water and dust proof IP66 rated outdoor luminaire

FEATURES

- Factory-Sealed LED Light Engine
- 20° Forward Throw Illumination
- Photo/Motion Sensor Compatible (Sold Separately)
- Built-in Level For Easy Adjustment
- Suitable to install in all directions
- Multi-Function Dimming: ELV (120V) or 0-10V
- 85 CRI
- 100,000 hour rated life

PHOTOMETRY

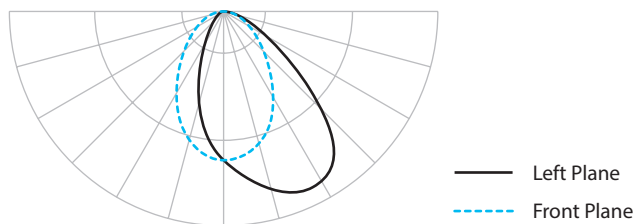

ORDER NUMBER

	Power	Comparable	Delivered Lumens		Color Temp	Finish		
			3000K	5000K				
	WP-LED119	19W	39W HID	1390	1460	30 3000K 50 5000K	BZ Bronze	
	WP-LED127	27W	70W HID	2075	2135		GH Graphite	
	WP-LED135	35W	100W HID	2750	2825		WT White	

- -

Example: **WP-LED119-50-BZ**

ACCESSORIES

Motion Sensor (120V) **MS-120-BZ** Bronze
MS-120-GY Gray
MS-120-WT White

Photo Sensor (120V) **PC-120-BZ** Bronze
PC-120-GY Gray
PC-120-WT White

WAC Lighting
 www.waclighting.com
 Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive • Port Washington, NY 11050
 Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
 1750 Archibald Avenue • Ontario, CA 91760
 Phone (800) 526.2588 • Fax (800) 526.2585