

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

I Can't Believe It's Not Recessed

Ceiling and Wall Mount

Model	Color Temp & CRI	Lumens	Finish
FM-616G2	930 3000K - 90	1050	WT White

Example: **FM-616G2-930-WT**

DESCRIPTION

Multiple mid-powered LEDs illuminate the opaque diffuser uniformly without socket shadows, which are common in conventional flush mounts.

FEATURES

- Imitates a traditional 6" line voltage recessed downlight with an R30 light bulb
- Multiple LED array for uniform illumination
- Driver installed within the Junction Box, driver dimension: 2.875" Dia x 0.875" Deep
- 5 year warranty

SPECIFICATIONS

Construction:	Aluminum with translucent diffuser
Power:	16W
Input:	120 VAC, 50/60Hz
Dimming:	TRIAC: 100-5%, ELV: 100-5%
Light Source:	Integrated LED
Lens:	Translucent acrylic diffuser
Rated Life:	54000 Hours
Mounting:	Installs into a 4" junction box or a combination 3/0-4/0 electrical box, Can be mounted on ceiling or wall in all orientations
Finish:	Electrostatically Powder Coated White
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed, Energy Star 2.0, Title 24 JA8-2016 Compliant, ADA




FINISHES



White

LINE DRAWING

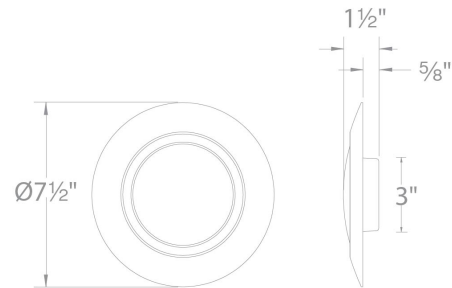

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

I Can't Believe It's Not Recessed

Ceiling and Wall Mount

ACCESSORIES

	<i>Model</i>	<i>Description</i>	<i>Finish</i>
	FM-616-RFK	<i>I Can't Believe It's Not Recessed</i>	-