

3.5" OCULUX - Open reflector

R3BRD, R3BSD

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Designed to fit in tight plenum space

FEATURES

- Energy Star® Rated
- Title 24 Compliant
- IC-rated Remodel and New Construction
- Airtight in New Construction and remodel
- Shallow housing under 4" depth
- Cutout 4 1/4"
- Single spot light source

SPECIFICATIONS

Construction: Die-cast aluminum trim and heat sink

Dimming: ELV or TRIAC or 0-10V dimming compatible

Input: 120V for R3BNICA-10, R3BBRT-10; 120-277V for R3BNICA-10U

Power: 11W

Mounting: Retention clips firmly hold trim to housing.

Finish: Powder coated

Ceiling thickness: 1/2" - 1"

Standards: ETL&cETL, Wet location listed

Trims (Order Housing Separately)	Model	Beam	Color Temp	Max Lumens	Max CBCP	Finish
	R3BRD Round Open Reflector Wet Location Listed 40° visual cutoff	S 15°	927 2700K	890	4526	BN Brushed Nickel WT White
			930 3000K	950	4819	
		N 25°	927 2700K	895	2473	
			930 3000K	955	2624	
		F 50°	927 2700K	885	1205	
			930 3000K	945	1260	
	R3BSD Square Open Reflector Wet Location Listed 35° visual cutoff	S 15°	927 2700K	890	4382	BN Brushed Nickel WT White
			930 3000K	950	4710	
		N 25°	927 2700K	895	2485	
			930 3000K	955	2671	
		F 50°	927 2700K	885	1240	
			930 3000K	945	1333	

R3BRD- - -

Example: R3BRD-S930-BN

waclighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

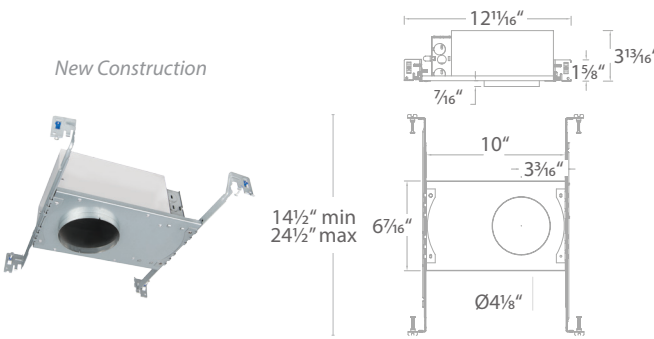
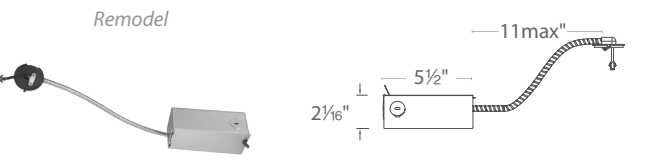
3.5" OCULUX - Open reflector

R3BRD, R3BSD

WAC LIGHTING

Responsible Lighting®

Housings (Required) - Order separately from trims

	Model	Input	Dimming	Notes
<p><i>New Construction</i></p>  <p>12¹/₁₆" 3¹³/₁₆" 7¹/₁₆" 1¹/₈" 10" - 3³/₁₆" 6⁷/₁₆" Ø4¹/₈" 14¹/₂" min 24¹/₂" max</p>	R3BNICA-10 IC-Rated, Airtight	120V	100% - 5% TRIAC, ELV, 0-10V	Less than 4" plenum depth Allows adjustment in any direction when used with adjustable trims
	R3BNICA-10U IC-Rated, Airtight	120V - 277V	120V 100% - 5% TRIAC, ELV, 0-10V 277V 100% - 1% 0-10V	Ceiling thickness: ½" - 1"
<p><i>Remodel</i></p>  <p>11max" 5¹/₂" 2¹/₁₆"</p>	R3BBRT-10 IC Rated	120V	100% - 5% TRIAC, ELV, 0-10V	Allows adjustment in any direction when used with adjustable trims Ceiling thickness: ½" - 1"

Example: **R3BNICA-10**

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760