

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Step Light with Photocell

| Model & Voltage | Color Temp & CRI | Lumens | Finish |
|-------------------|-------------------|--------|---|
| WL-LED102 120 VAC | 3000K 90 Amber | 65 | BK Black on Aluminum BN Brush Nickel on Aluminum BZ Bronze on Aluminum SS Stainless Steel WT White on Aluminum |

Example: **WL-LED102-30-BK**

FEATURES


- Options in die-cast brass or 316 marine-grade stainless steel
- Fits into 2"4" J-Box with minimum inside dimensions of 3"2"2"
- No driver needed
- No heat radiation
- Low profile, flush to wall aesthetics with no visible hardware
- Balanced lighting, free of shadows with minimum glare
- Integrated photocell for energy saving
- Driver concealed within the fixture
- 5 Year warranty

SPECIFICATIONS

| | |
|------------------------|---|
| Construction: | Corrosion resistant aluminum alloy, Stainless Steel |
| Power: | 2W |
| Input: | 120 VAC, 50/60Hz |
| Light Source: | Integrated LED 3 Step Mac Adam Ellipse |
| Lens: | Tempered Glass |
| Rated Life: | 54000 Hours |
| Finish: | Enamel Coated Black on Aluminum, Enamel Coated Brush Nickel on Aluminum, Enamel Coated Bronze on Aluminum, Enamel Coated White on Aluminum, Stainless Steel Stainless Steel |
| Operating Temp: | -40°F to 122°F (-40°C to 50°C) |
| Standards: | ETL, cETL, Wet Location Listed, IP66, ADA |



FINISHES

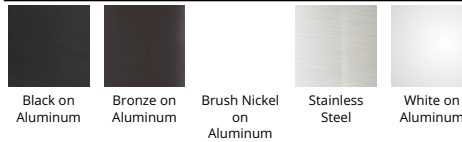

LINE DRAWING

