

Highwire

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PD-19043 43"	3000K 90	23W	120-277 VAC	1150	758	BK Black

Example: **PD-19043-BK**

DESCRIPTION


A perfect balancing act. Feather-light yet substantial.

FEATURES

- Six 12" and two 6" downrods included for PD-19050; Three 12" and one 6" downrods included for PD-19043 (additional downrods available)
- PD-19043 can be mounted on a sloped ceiling
- Driver conceals within the canopy
- Quick install canopy for PD-19043 only
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Steel hardware with frosted acrylic diffuser

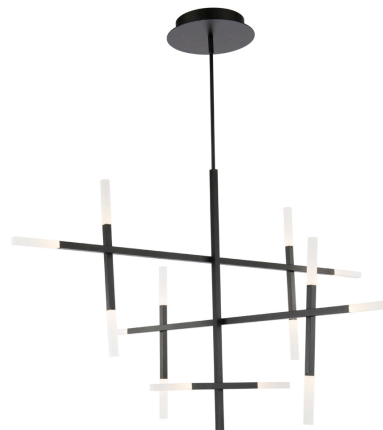


FINISHES



Black

LINE DRAWING

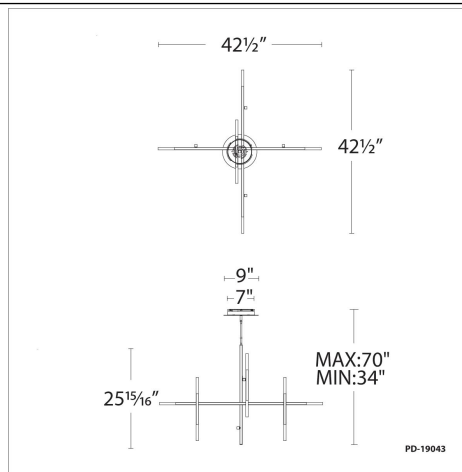

Highwire

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PD-19050 50"	3000K 90	20W	120-277 VAC	1000	801	BK Black

Example: **PD-19050-BK**

DESCRIPTION

A perfect balancing act. Feather-light yet substantial.

FEATURES

- Six 12" and two 6" downrods included for PD-19050; Three 12" and one 6" downrods included for PD-19043 (additional downrods available)
- PD-19043 can be mounted on a sloped ceiling
- Driver conceals within the canopy
- Quick install canopy for PD-19043 only
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Steel hardware with frosted acrylic diffuser



FINISHES



Black

LINE DRAWING

