

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Reed Swing Arm 3000K

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PL-11017 17"	3000K 90	14W	120-277 VAC	569	380	BK Black BN Brushed Nickel

Example: **PL-11017-BK**

### DESCRIPTION

The perfect complement to any display piece. Conserves fine art while providing superior color rendering.

### FEATURES


- Light source can be articulated
- Simple, elegant slim profile design
- Driver conceals within the canopy
- Conversion plate for 4" J box included.
- 5 Year warranty

### SPECIFICATIONS


<b>Color Temp:</b>	3000K
<b>Input:</b>	120-277 VAC, 50/60Hz
<b>CRI:</b>	90
<b>Dimming:</b>	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-5%
<b>Rated Life:</b>	50000 Hours
<b>Standards:</b>	ETL, cETL Damp Location Listed
<b>Construction:</b>	Aluminum hardware with acrylic diffuser



### FINISHES



### LINE DRAWING

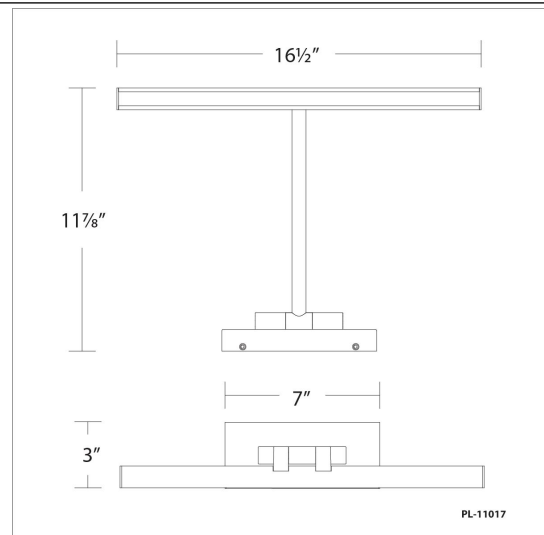

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Reed Swing Arm 3000K

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PL-11025 25"	3000K 90	17W	120-277 VAC	825	544	BK Black BN Brushed Nickel

Example: **PL-11025-BK**

### DESCRIPTION

The perfect complement to any display piece. Conserves fine art while providing superior color rendering.

### FEATURES


- Light source can be articulated
- Simple, elegant slim profile design
- Driver conceals within the canopy
- Conversion plate for 4" J box included.
- 5 Year warranty

### SPECIFICATIONS


<b>Color Temp:</b>	3000K
<b>Input:</b>	120-277 VAC, 50/60Hz
<b>CRI:</b>	90
<b>Dimming:</b>	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-5%
<b>Rated Life:</b>	50000 Hours
<b>Standards:</b>	ETL, cETL Damp Location Listed
<b>Construction:</b>	Aluminum hardware with acrylic diffuser



### FINISHES



### LINE DRAWING

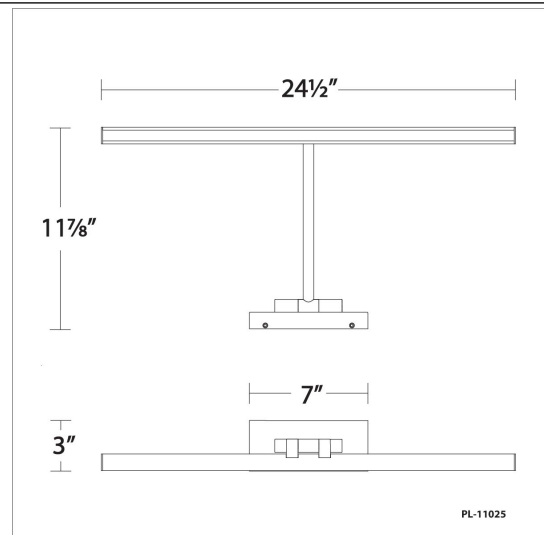

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Reed Swing Arm 3000K

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PL-11033 33"	3000K 90	25W	120-277 VAC	1072	747	BK Black BN Brushed Nickel

Example: **PL-11033-BK**

### DESCRIPTION

The perfect complement to any display piece. Conserves fine art while providing superior color rendering.

### FEATURES


- Light source can be articulated
- Simple, elegant slim profile design
- Driver conceals within the canopy
- Conversion plate for 4" J box included.
- 5 Year warranty

### SPECIFICATIONS

<b>Color Temp:</b>	3000K
<b>Input:</b>	120-277 VAC, 50/60Hz
<b>CRI:</b>	90
<b>Dimming:</b>	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-5%
<b>Rated Life:</b>	50000 Hours
<b>Standards:</b>	ETL, cETL Damp Location Listed
<b>Construction:</b>	Aluminum hardware with acrylic diffuser



### FINISHES



### LINE DRAWING

