


# BLITZEN

## F-060L

54" Ceiling Fan



**WAC**  
SMART FANS

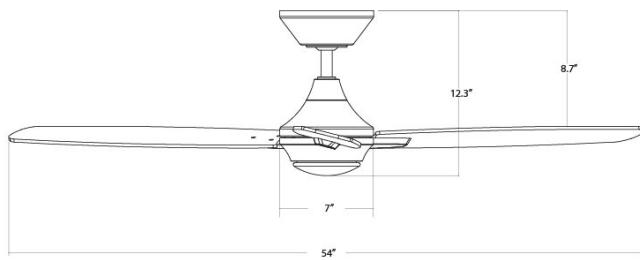

### PRODUCT DESCRIPTION

A sleek design incorporated with advanced technology and flexible control solutions defined. Blitzen is available in three finishes—Matte Black, Matte White and Brushed Nickel. A deluxe smart ceiling fan for fine interiors and exteriors.

### FEATURES

- 6 fan speeds through both Summer and Winter Modes
- Silent DC motor
- Luminaire cover not included
- Includes remote control with wall cradle (RC20-WT)
- Wall control for 3, 4-way control sold separately

### AIRFLOW/ENERGY EFFICIENCY

Weighted-Average/High Airflow CFM:	3043/4796
Weighted-Average/High Energy Use (W):	18/22
Estimated Yearly Energy Cost (\$):	5
High Efficiency (CFM/W):	169
Max RPM:	162

### ORDER NUMBER

Model	Housing	Blade
F-060L	BN	Brushed Nickel
	MB	Matte Black
	MW	Matte White
	SB	Soft Brass
	TT	Titanium Silver
	MB	Matte Black
	MW	Matte White
	MB	Matte Black

### F-060L-

Example: F-060L-MB

\*This fan comes uni-pack - blade select options are not available

\* Range results may vary based on application and surroundings.

### SPECIFICATIONS

<b>Construction:</b>	Steel, Plywood
<b>Blade:</b>	14° Pitch, 54" sweep
<b>Downrod:</b>	3/4"W X 4.5"H included
<b>Mounting Slope:</b>	Up to 30°
<b>Wire:</b>	80"
<b>Hanging Weight:</b>	14 lbs
<b>Total Power:</b>	38W
<b>Standards:</b>	UL/cUL Damp Location listed, Title 24 JA8-2016 Compliant, Title 20 Compliant, Energy Star Rated
<b>Motor Type:</b>	120 x 20 sensorless DC motor

### WIRELESS PERFORMANCE

Wi-Fi Range:	Up to 150 ft*
Bluetooth Range:	Up to 150 ft*

### LUMINAIRE PERFORMANCE

<b>Light Source:</b>	LED
<b>Light Wattage:</b>	16W
<b>Lumens/Delivered Lumens:</b>	1606/703
<b>Dimming:</b>	Integrated
<b>CRI:</b>	90
<b>Color Temperature:</b>	2700K, 3000K, 4000K, 5000K (CCT)
<b>Rated Life:</b>	50,000 hours

The WAC app synchronizes seamlessly with smart home devices you already own



waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

## OPTIONAL ACCESSORIES

Bluetooth Wall Control		WC20-	WT White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Additional Wall Controls can be purchased separately for multiple location control.
Bluetooth Remote Control		RC20-	WT White	Control fan speed and light brightness, and switch between Summer and Winter Modes. Compatible with WAC Smart Fans. Includes easy-to-install wall cradle and batteries.
Downrod		DR12- DR18- DR24- DR36- DR48- DR60- DR72-	12IN 18IN 24IN 36IN 48IN 60IN 72IN	All our downrods are 1" O.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers		DC-	BN MB MW	Brushed Nickel Matte Black Matte White
Sloped Ceiling Kit		SC-		Connects two downrods together.
				Designed to accommodate buildings with steeper sloped ceilings up to 45o or 12/12 pitch.

Examples: Wall Control - **WC20-WT**, Remote Control - **RC20-WT**, Downrod - **DR12-BN**, Downrod Coupler - **DC-MB**, Sloped Ceiling Kit - **SC-MW**

## SUGGESTED DOWNRod HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

## SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13o	14-17o	18-21o	22-25o	26-29o	30-32o	33-35o	36-38o	39-41o	42-44o	45o
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

NOTE: Recommended maximum downrod length of 72" with 80" lead wire