

WAC LIGHTING

Fitzgerald Wall Sconce

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

| Model & Size | Color Temp & CRI | Watt | LED Lumens | Delivered Lumens | Finish |
|--------------|------------------|------|------------|------------------|-------------------|
| WS-47108 8" | 2700K 90 | 13W | 1100 | 694 | AB Aged Brass |
| | 3000K 90 | 13W | 1100 | 715 | BK Black |
| | 3500K 90 | 13W | 1100 | 581 | BN Brushed Nickel |

Example: **WS-47108-27-AB**

DESCRIPTION

Legendary style without pretense. Effortlessly classy

FEATURES


- Fabric shade with top and bottom etched acrylic diffuser
- 3CCT (2700K/3000K/3500K) selectable switch
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


| | |
|----------------------|--|
| Color Temp: | 3500K, 3000K, 2700K |
| Input: | 120 VAC, 50/60Hz |
| CRI: | 90 |
| Dimming: | ELV: 100-10%, TRIAC: 100-10% |
| Rated Life: | 54000 Hours |
| Mounting: | Can be mounted on wall in all orientations |
| Standards: | ETL, cETL, Title 24: 2019 Dry Location Listed |
| Construction: | Aluminum body, fabric diffuser |



FINISHES

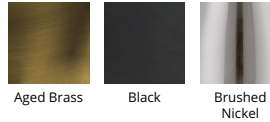

LINE DRAWING

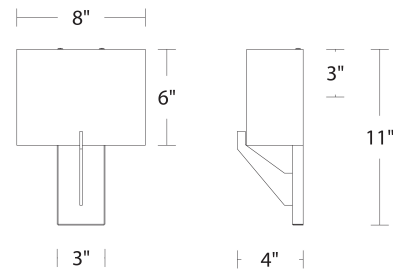

WS-47108

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Fitzgerald Wall Sconce

| Model & Size | Color Temp & CRI | Watt | LED Lumens | Delivered Lumens | Finish |
|--------------|------------------|------|------------|------------------|-------------------|
| WS-47116 16" | 2700K 90 | 16W | 1400 | 805 | AB Aged Brass |
| | 3000K 90 | 16W | 1400 | 863 | BK Black |
| | 3500K 90 | 16W | 1400 | 866 | BN Brushed Nickel |

Example: **WS-47116-27-AB**

DESCRIPTION

Legendary style without pretense. Effortlessly classy

FEATURES


- Fabric shade with top and bottom etched acrylic diffuser
- 3CCT (2700K/3000K/3500K) selectable switch
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


| | |
|----------------------|--|
| Color Temp: | 3500K, 3000K, 2700K |
| Input: | 120 VAC, 50/60Hz |
| CRI: | 90 |
| Dimming: | ELV: 100-10%, TRIAC: 100-10% |
| Rated Life: | 54000 Hours |
| Mounting: | Can be mounted on wall in all orientations |
| Standards: | ETL, cETL, Title 24: 2019 Dry Location Listed |
| Construction: | Aluminum body, fabric diffuser |



FINISHES

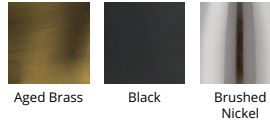

LINE DRAWING

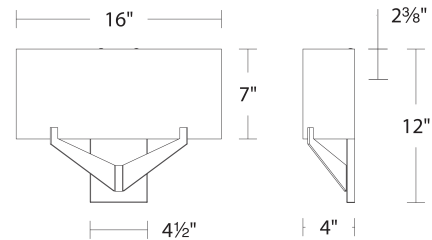

WS-47116