

R4FRRL, R4FSRL

4" FQ Trimless Remodel Housing

WAC

SPECIFICATIONS

Input: Universal 120-277V AC 50/60 Hz

Standards: ETL & cETL

Dimming: Electronic Low Voltage (ELV): 100%-1%
TRIAC: 100%-1%
0-10V: 100-1%

Mounting: Ceiling thickness: 1/2" - 1"
Ceiling cutout: Ø 4 3/4"

Construction: 20 Gauge galvanized sheet
Die-cast spackle flange included


Warranty: 5 year WAC Lighting product warranty

Fixture Type:

Catalog Number:

Project: _____



Location: _____

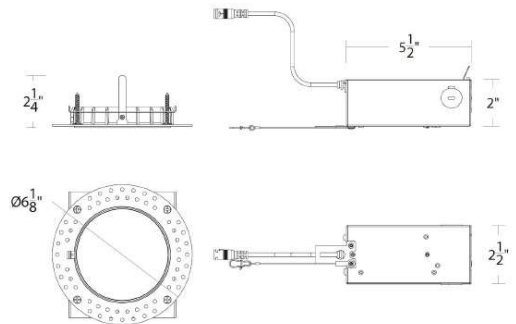

Model	Power	Rating	Compatible Trims
R4FRRL	1 13W	Non-IC	R4FRDL
Round Trimless	2 19W	Non-IC	R4FRAL
	3 25W	Non-IC	R4FRWL
	4 28W	Non-IC	

R4FRRL-__

Example: **R4FRRL-2**

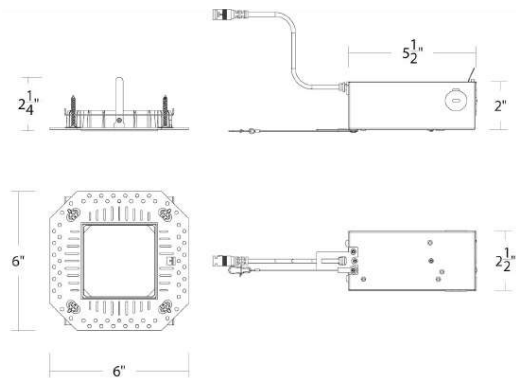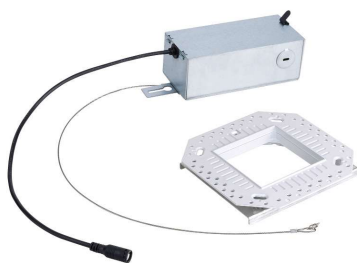

Model	Power	Rating	Compatible Trims
R4FSRL	1 13W	Non-IC	R4FSDL
Square Trimless	2 19W	Non-IC	R4FSAL
	3 25W	Non-IC	R4FSWL
	4 28W	Non-IC	

R4FSRL-__

Example: **R4FSRL-1**

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91761