

# WAC LIGHTING

## Lotos R 4"

### Adjustable Downlight 5CCT

| Model   | Beam | Color Temp & CRI                          | Lumens     | CBCP       | Finish               |
|---------|------|-------------------------------------------|------------|------------|----------------------|
| R4ERA2R | W 50 | 9CS<br>2700K/3000K/3500K/4000K/5000K - 90 | 740<br>775 | 733<br>750 | BK Black<br>WT White |

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Example: **R4ERA2R-W9CS-BK**

#### FEATURES


- 5-CCT Switchable between 2700K and 5000K
- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Driver included
- 5 year warranty

#### SPECIFICATIONS


|                    |                                                                              |
|--------------------|------------------------------------------------------------------------------|
| Construction       | Steel with frosted TIR lens                                                  |
| Power:             | 9W                                                                           |
| Input:             | 120 -277 VAC,50/60Hz                                                         |
| Dimming:           | ELV: 100-5% , TRIAC: 100-5%                                                  |
| Light Source:      | Integrated LED                                                               |
| Lens:              | Translucent acrylic diffuser                                                 |
| Rated Life:        | 50,000 Hours                                                                 |
| Mounting:          | Heavy gauge retention clips secures fixture to ceiling                       |
| Cut Out:           | 4"                                                                           |
| Finish:            | Electrostatically powder coated White, Electrostatically powder coated Black |
| Ceiling Thickness: | 1/2" - 1"                                                                    |
| Operating Temp:    | -4°F to 104°F (-20°C to 40°C)                                                |
| Standards:         | ETL, cETL, Wet Location Listed, Title 24 JA8 Compliant, Airtight, IC         |



#### FINISHES:



#### LINE DRAWING

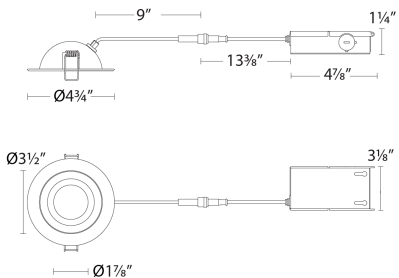

Lotos R 4" Adjustable  
R4ERA2R-W930-WT

WAC LIGHTING

Lotos R 4"

Adjustable Downlight 5CCT

Fixture Type:

Catalog Number:

Project:

Location:

ACCESSORIES

|                                                                                   | Model     | Description | Finish |
|-----------------------------------------------------------------------------------|-----------|-------------|--------|
|  | RER-FRAME | Lotos       |        |