

WAC LIGHTING

Cubix

Wall Mount 5CCT

| Model | Color Temp & CRI | Lumens | Finish |
|------------|------------------------------------|--------|-----------------------------------|
| WS-W220208 | 2700K/3000K/3500K/4000K/5000K - 80 | 685 | BK Black BZ Bronze WT White |

Fixture Type:

Catalog Number:

Project:

Location:

Example: **WS-W220208-CS-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Available in single and double directions, Cubix is ideal for illuminating outdoor entrances and walkways.

FEATURES


- Multiple LED array for uniform illumination
- WS-W220208 is one direction, WS-W220212 is an up & down light
- 5CCT switch located on back of canopy
- ACLED driverless technology
- 5 Year warranty

SPECIFICATIONS


| | |
|--------------|---------------------------------------|
| Color Temp: | 2700K/3000K/3500K/4000K/5000K |
| Input: | 120 VAC, 50/60Hz |
| CRI | 80 |
| Dimming: | ELV: 100-10% |
| Rated Life: | 50,000 Hours |
| Mounting: | Installs over a 3" or 4" Junction Box |
| Standards: | ETL, cETL, ADA, Wet Location Listed |
| Construction | Die-cast aluminum |



FINISHES:



LINE DRAWING

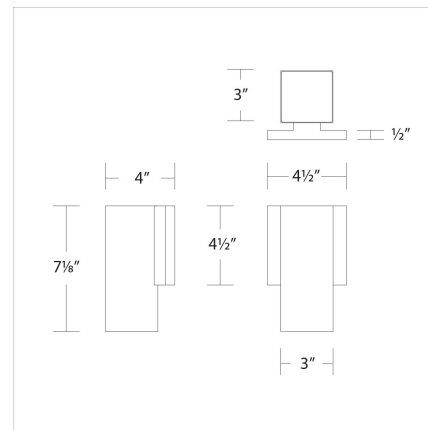

WAC LIGHTING

Cubix

Wall Mount 5CCT

| Model | Color Temp & CRI | Lumens | Finish |
|------------|------------------------------------|--------|-----------------------------------|
| WS-W220212 | 2700K/3000K/3500K/4000K/5000K - 80 | 1440 | BK Black BZ Bronze WT White |

Fixture Type:

Catalog Number:

Project:

Location:

Example: **WS-W220212-CS-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Available in single and double directions, Cubix is ideal for illuminating outdoor entrances and walkways.

FEATURES


- Multiple LED array for uniform illumination
- WS-W220208 is one direction, WS-W220212 is an up & down light
- 5CCT switch located on back of canopy
- ACLED driverless technology
- 5 Year warranty

SPECIFICATIONS

| | |
|--------------|---------------------------------------|
| Color Temp: | 2700K/3000K/3500K/4000K/5000K |
| Input: | 120 VAC, 50/60Hz |
| CRI | 80 |
| Dimming: | ELV: 100-10% |
| Rated Life: | 50,000 Hours |
| Mounting: | Installs over a 3" or 4" Junction Box |
| Standards: | ETL, cETL, ADA, Wet Location Listed |
| Construction | Die-cast aluminum |



FINISHES:



LINE DRAWING

