


CATALOG NUMBER	TYPE
PROJECT	

LED 500 Series Socket Set

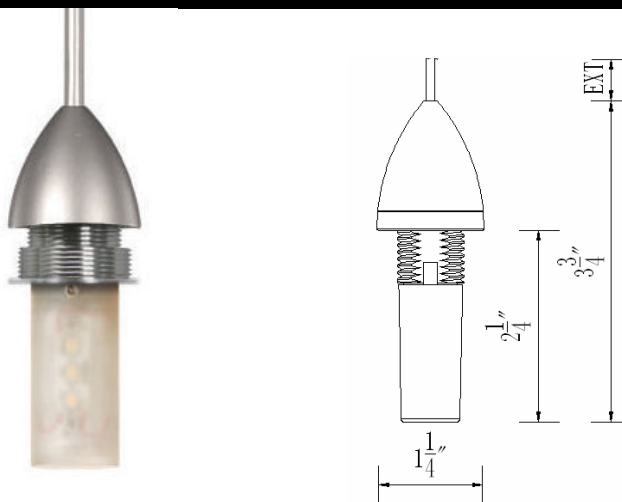

Ordering Matrix for Canopy Application

Model Number	Finish of Socket Set		
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
MP-LED503	BN	CH	DB

Ordering Examples for MP LED socket set (*model number/finish*): MP-LED503-BN

Ordering Matrix for Solorail™/Duorail™ Application

Model	Series		Finish		
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
QP-	LED503	LED503X12	BN	CH	DB

Ordering Example (*model – series – finish*): QP-LED503-BN

Product Details

Description:	Energy efficient LED socket set used for WAC 500 series glass shades. Easy installation and height adjustment.
Compatible Systems:	MP socket set must use MP-LED05M-BN canopy (included). QP socket set is compatible with 12V Solorail™ and Duorail™.
LED Engine:	Input power: 5W Input Voltage: 12V AC Fixture lumen: 230 lm Color temperature: 3500K CRI: 70
Dimming:	Dimmable MP socket set with electronic low voltage dimmer. Dimmable QP socket set with electronic low voltage dimmer when using a magnetic transformer.
Materials:	Aluminum construction, acrylic diffuser and six feet of a low voltage braided wire
Finish:	BN – Brushed Nickel, CH- Chrome, DB – Dark Bronze
Listing:	UL & CUL Listed.

Specification Features

- LED pendant comes with 6 feet of cable and may be adjusted in the field to any required length.
- Free of projected heat, UV, and IR
- Dimmable with Electronic Low Voltage (ELV) dimmer
(Range from 100% to 15%)
- 30,000 hour lifetime
- 5 year WAC lighting product warranty