
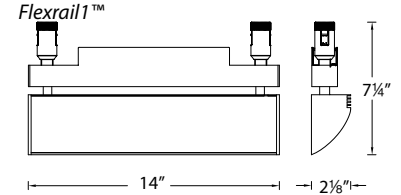
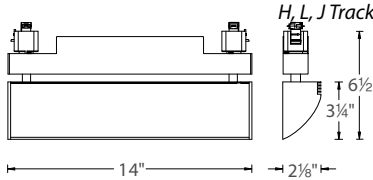


LED42W - LED Wall Washer

LEDme® Track / Rail Luminaire

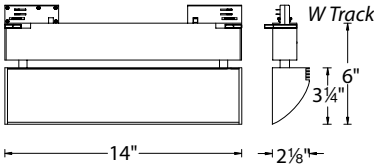

PRODUCT DESCRIPTION

Designed and engineered to meet the challenging demands of the most discriminating designers and specifiers, these state-of-the-art LED thin-profile wall washers are ideal for upscale museums, retail and hospitality applications and other commercial spaces.

FEATURES

- Replaces halogen and fluorescent wall wash luminaires
- Simple professional design
- Thin side profile
- 45° vertical tilt
- 100,000 hour rated life
- 5 year WAC Lighting product warranty

FIXTURE PERFORMANCE

| Model # | Input Voltage | Color Temp | Watts | Lumens | Efficacy | CRI |
|-----------|---------------|------------|-------|--------|----------|-----|
| LED42W-27 | 120V | 2700K | 42W | 2179 | 51 Lm/W | 85 |
| LED42W-30 | | 3000K | | 2204 | 52 Lm/W | |
| LED42W-35 | | 3500K | | 2441 | 56 Lm/W | |
| LED42W-40 | | 4000K | | 2586 | 60 Lm/W | |
| LED42W-27 | 277V | 2700K | 42W | 2105 | 49 Lm/W | 85 |
| LED42W-30 | | 3000K | | 2135 | 50 Lm/W | |
| LED42W-35 | | 3500K | | 2365 | 55 Lm/W | |
| LED42W-40 | | 4000K | | 2520 | 59 Lm/W | |

ORDER NUMBER

| Track Type | Model# | Color Temp | Finish |
|--------------------|----------|--|-------------------------------|
| H 120V H Track | LED42W | 27 2700K 30 3000K 35 3500K 40 4000K | BK Black |
| L 120V L Track | | | WT White |
| J 120V J Track | | | BK Black |
| WTK 120V W Track | | | PT Platinum |
| WHK 277V W Track | WT White | | |
| HM1 120V Flexrail™ | | | DB Dark Bronze PT Platinum |



Example: WTK-LED42W-27-WT

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

WAC LIGHTING

Responsible Lighting®

Fixture Type:

Catalog Number:

Project:

Location:

SPECIFICATIONS

Construction: Aluminum

Aiming: 45° vertical tilt.


Light Source: Philips LED

Dimming: 120V only - Dim to 10% with electronic low voltage (ELV) dimmer.

Finish: Available in black powder coat (BK), dark bronze (DB), white powder coat (WT), or platinum anodized (PT) finishes.

Standards: ETL & cETL listed.

Average Footcandle Performance

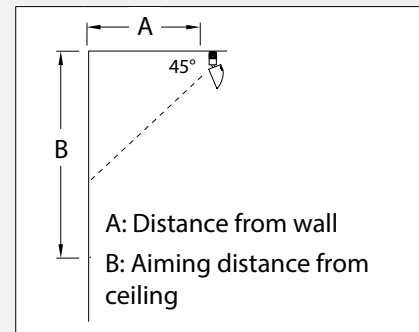

| | | A | |
|---|----|----|----|
| | | 3' | 4' |
| B | 1' | 37 | 20 |
| | 2' | 45 | 24 |
| | 4' | 28 | 20 |
| | 6' | 11 | 12 |