

ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: Be sure the electricity to the wires you are working on is shut off, either the fuse is removed or the circuit breaker is shut off.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

Carefully remove the fixture from the carton, and check that all parts are included, as shown in figure. Be careful not to misplace any of the screws or parts which are needed for installing the fixture.

Assembly and Installation Step:

1. Unscrew and remove the screws from the cover & frame. Then loosen the glass clips at the top corners of the shelf. Place the glass into the frame carefully, and then restore the screws and clips back to secure the glass.

Note: To install the glass correctly:

- Attach the EVA gasket inside the kit to the middle of the narrow side glass.
- Slide the narrow sides of the glass downward into the frame in turn.
- Place the side of the bevelled glass toward to outside.

2. Cross Bar onto Outlet Box using 2 Outlet Box Screws. (Make sure the thread of the mounting screws is facing outside when the Cross Bar is attached to the Outlet Box).


3. Using 2 pliers, twist opens the links at two ends of the Chain. Hook one link to the Loop of the Canopy, and close the link. Hook the other link to the Loop of the fixture, and close the link. Wave the fixture wires up through the chain links, the Loop and the Canopy in the Cross Bar.

4. Connect wires with white to white and black to black, cover the connections by using the Wire Nuts provided. Tie the ground wire from Outlet Box and from fixture to the Ground Screw on the Cross Bar.

5. Fasten the Canopy onto the ceiling using the Lock Nuts provided.

6. Unscrew the Bolt nuts from the Cover. Install the bulb (Not included) and then lock nut.

7. Turn on the power.

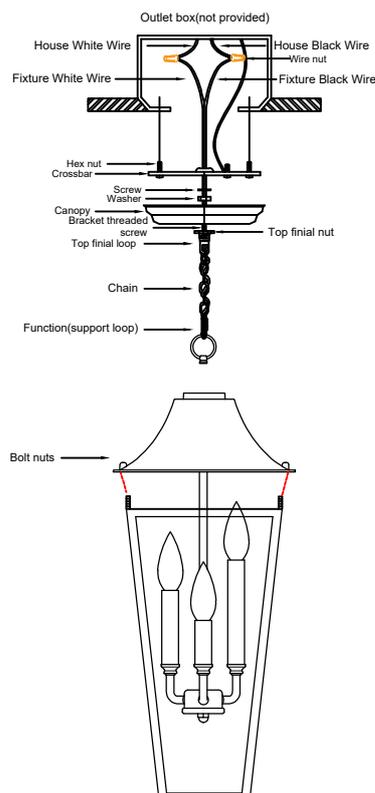

5008CHB/5008CHXL/5008CHXXL